

# Antenna

# YC0002AA Datasheet

## Antenna Services

Version: 2.5

Date: 2021-07-15

Status: Released



**Our aim is to provide customers with timely and comprehensive service. For any assistance, please contact our company headquarters:**

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: [info@quectel.com](mailto:info@quectel.com)

**Or our local office. For more information, please visit:**

<http://www.quectel.com/support/sales.htm>.

**For technical support, or to report documentation errors, please visit:**

<http://www.quectel.com/support/technical.htm>

Or email to [support@quectel.com](mailto:support@quectel.com).

## **General Notes**

Quectel offers the information as a service to its customers. The information provided is based upon customers' requirements. Quectel makes every effort to ensure the quality of the information it makes available. Quectel does not make any warranty as to the information contained herein, and does not accept any liability for any injury, loss or damage of any kind incurred by use of or reliance upon the information. All information supplied herein is subject to change without prior notice.

## **Disclaimer**

While Quectel has made efforts to ensure that the functions and features under development are free from errors, it is possible that these functions and features could contain errors, inaccuracies and omissions. Unless otherwise provided by valid agreement, Quectel makes no warranties of any kind, implied or express, with respect to the use of features and functions under development. To the maximum extent permitted by law, Quectel excludes all liability for any loss or damage suffered in connection with the use of the functions and features under development, regardless of whether such loss or damage may have been foreseeable.

## **Duty of Confidentiality**

The Receiving Party shall keep confidential all documentation and information provided by Quectel, except when the specific permission has been granted by Quectel. The Receiving Party shall not access or use Quectel's documentation and information for any purpose except as expressly provided herein. Furthermore, the Receiving Party shall not disclose any of the Quectel's documentation and information to any third party without the prior written consent by Quectel. For any noncompliance to the above requirements, unauthorized use, or other illegal or malicious use of the documentation and information, Quectel will reserve the right to take legal action.

## Copyright

The information contained here is proprietary technical information of Quectel. Transmitting, reproducing, disseminating and editing this document as well as using the content without permission are forbidden. Offenders will be held liable for payment of damages. All rights are reserved in the event of a patent grant or registration of a utility model or design.

***Copyright © Quectel Wireless Solutions Co., Ltd. 2021. All rights reserved.***

# About the Document

## Revision History

Version	Date	Author	Note
1.0	2020-06-03	Kenny YIN	Initial
2.0	2020-06-22	Kenny YIN	Updated the specifications in Chapter 3.
2.1	2020-12-16	Kenny YIN	Updated the antenna image in Chapter 2.
2.2	2021-01-27	Kenny YIN	Added the return loss and package, and updated the direction map.
2.3	2021-03-17	Kenny YIN	Updated the product height tolerance in Chapter 12.
2.4	2021-06-17	Kenny YIN	Updated working temperature in Chapter 3.
2.5	2021-07-15	Kenny YIN	Updated the drawing in Chapters 6, 8 and 12.

## Contents

About the Document .....	3
Contents .....	4
<b>1 Product Description.....</b>	<b>5</b>
<b>2 Product Features .....</b>	<b>5</b>
<b>3 Product Specifications .....</b>	<b>6</b>
<b>4 Overall Performance.....</b>	<b>7</b>
4.1. Test Environment .....	7
4.2. VSWR.....	8
4.3. Return Loss.....	8
4.4. Efficiency.....	9
4.5. Gain.....	10
4.6. Radiation Pattern .....	12
4.6.1. 690 MHz .....	12
4.6.2. 820 MHz .....	13
4.6.3. 890 MHz .....	14
4.6.4. 960 MHz .....	14
4.6.5. 1710 MHz .....	15
4.6.6. 1810 MHz .....	16
4.6.7. 1910 MHz .....	16
4.6.8. 1990 MHz .....	17
4.6.9. 2170 MHz .....	18
4.6.10. 2300 MHz .....	18
4.6.11. 2400 MHz .....	19
4.6.12. 2500 MHz .....	20
4.6.13. 2600 MHz .....	20
4.6.14. 2700 MHz .....	21
<b>5 Schematic Symbol and Pin Definition .....</b>	<b>22</b>
<b>6 Transmission Line .....</b>	<b>23</b>
<b>7 Matching Circuit.....</b>	<b>24</b>
<b>8 Host PCB Requirement (unit: mm).....</b>	<b>25</b>
<b>9 Soldering Temperature.....</b>	<b>26</b>
<b>10 Reflow Profile .....</b>	<b>26</b>
<b>11 Package.....</b>	<b>27</b>
<b>12 Product Size (unit: mm).....</b>	<b>28</b>


## 1 Product Description

The antenna is designed for superior performance, and can be widely used for wireless applications.

We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

## 2 Product Features

- 4G LTE SMD Antenna
- High efficiency
- Excellent performance

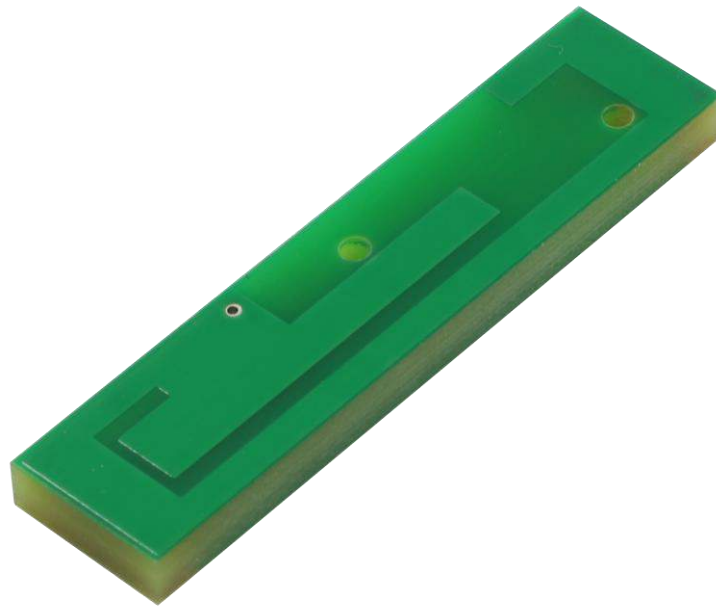

### 3 Product Specifications

#### Passive Electrical Specifications

Frequency Range	698–960 MHz, 1710–2690 MHz
Input Impedance	50 $\Omega$
VSWR	$\leq 3.0$
Gain	$\leq 3$ dBi
Polarization Type	Linear

#### Mechanical Specifications

Antenna Size	42 mm $\times$ 10 mm $\times$ 3 mm
Casing	FR4
Connector Type	SMD
Working Temperature	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Radome Color	Green

## 4 Overall Performance


### 4.1. Test Environment

- KEYSIGHT VNA Network Analyzer E5063A 100 kHz – 8.5 GHz
- RayZone® 2800 Chamber 5G (FR1) SISO/MIMO, 400 MHz – 8.0 GHz






### 4.2. VSWR


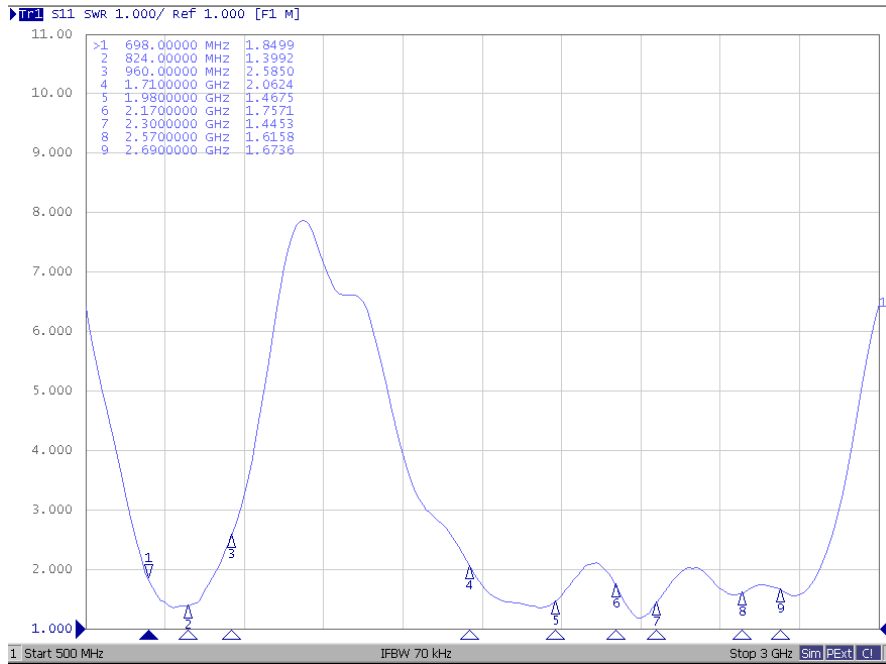



Frequency (MHz)	698	824	960	1710	1980	2170	2300	2570	2690
VSWR	1.85	1.40	2.59	2.06	1.47	1.76	1.45	1.62	1.67

### 4.3. Return Loss

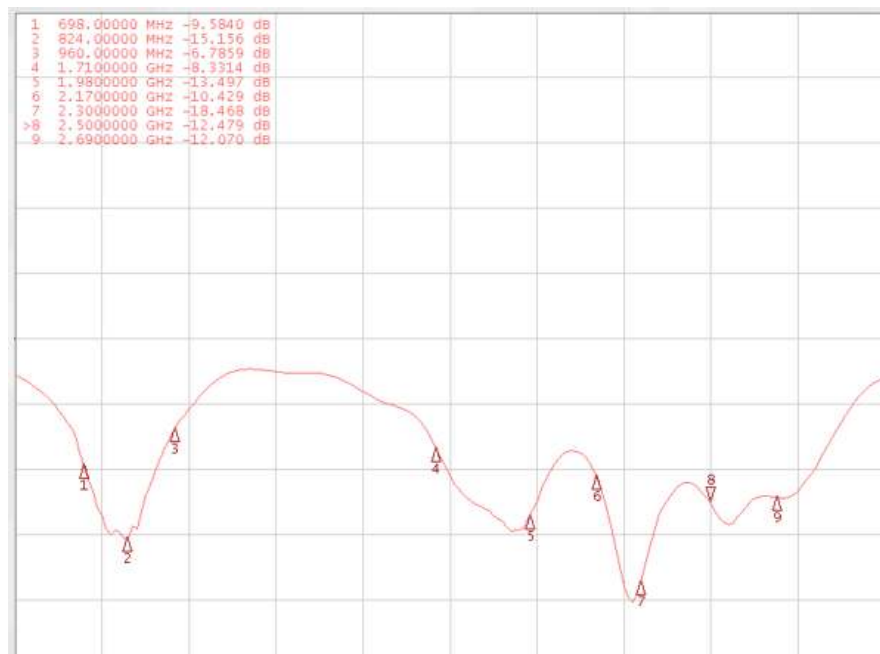


### 4.4. Efficiency

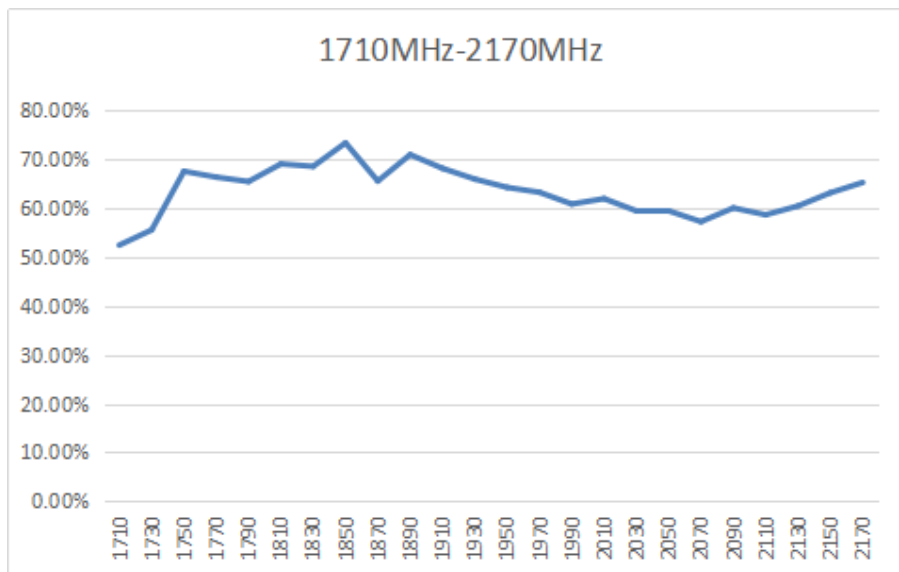
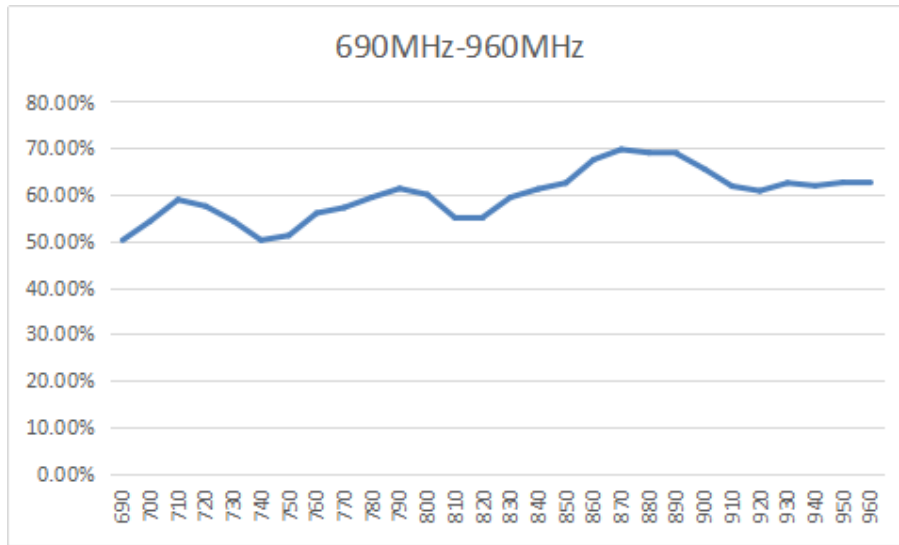


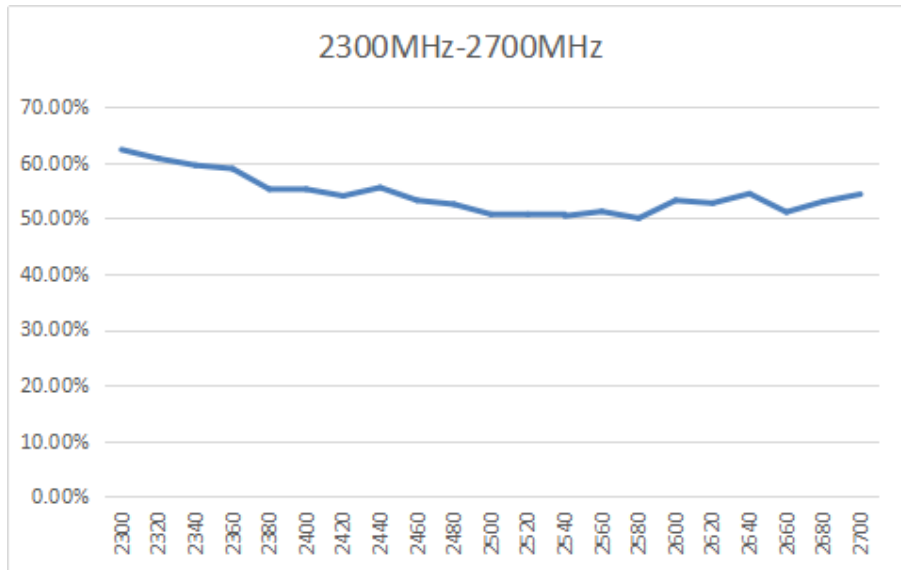

<b>Frequency (MHz)</b>	690	820	960	1710	1990	2170	2300	2580	2680
<b>Eff. (%)</b>	50.20	55.10	62.5	52.4	60.8	65.2	62.3	50	53


### 4.5. Gain

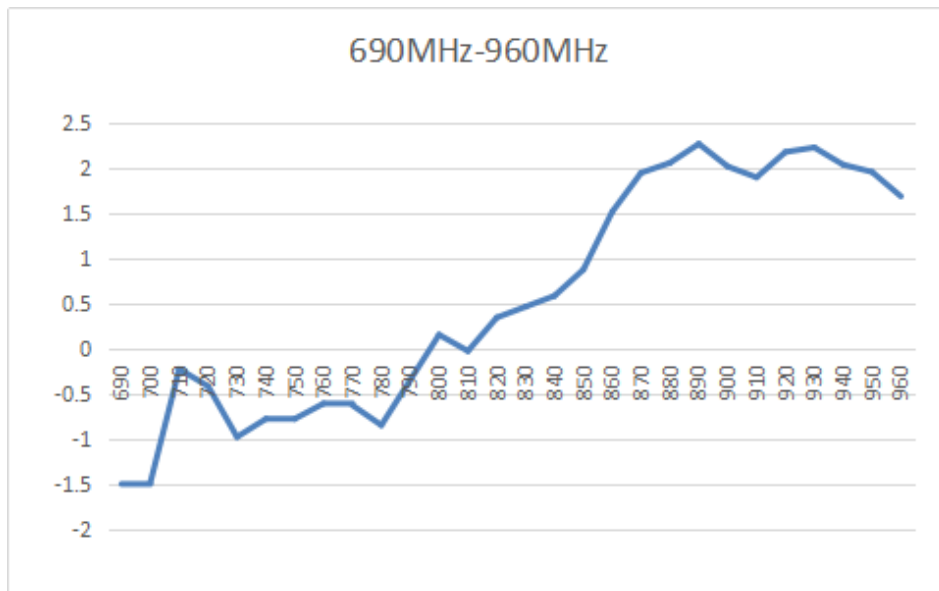

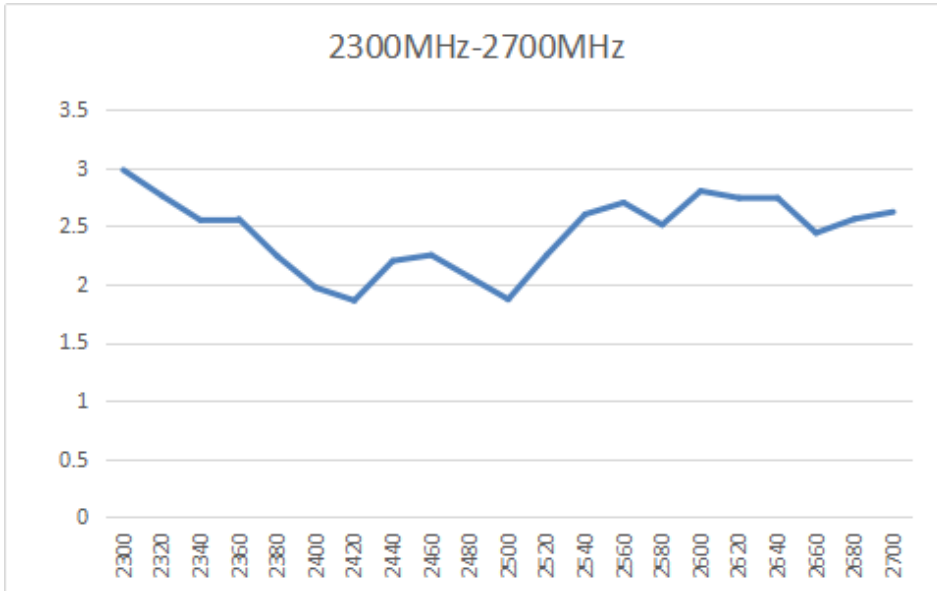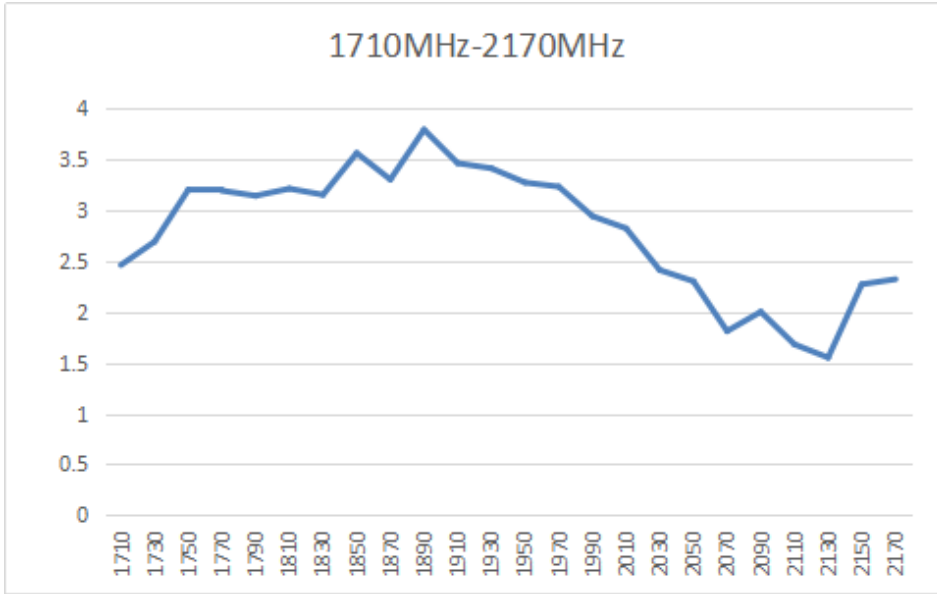



<b>Frequency (MHz)</b>	690	820	960	1710	1990	2170	2300	2580	2680
<b>Gain (dBi)</b>	-1.5	0.34	1.68	2.46	2.94	2.32	2.98	2.51	2.56

### 4.6. Radiation Pattern


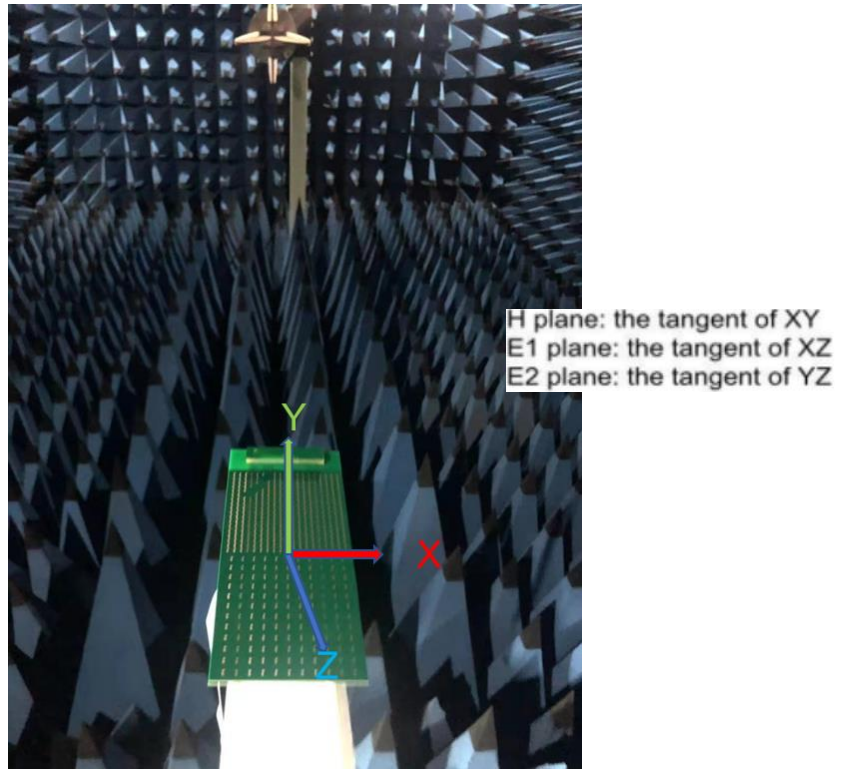


#### 4.6.1. 690 MHz

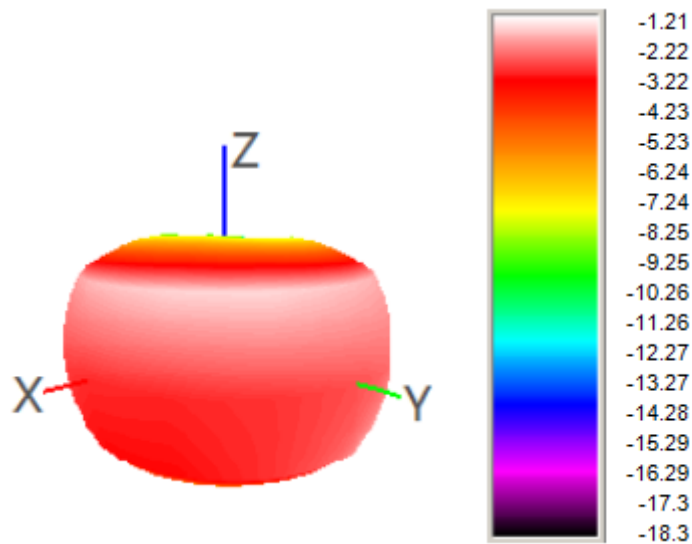


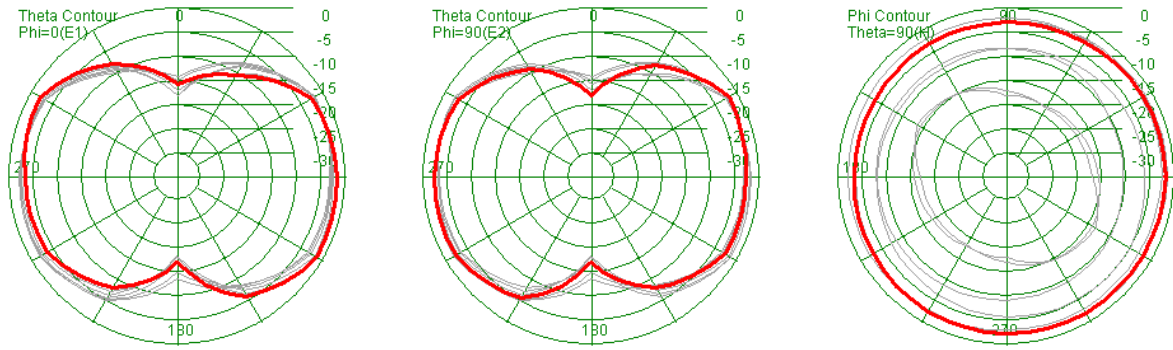


**4.6.2. 820 MHz**

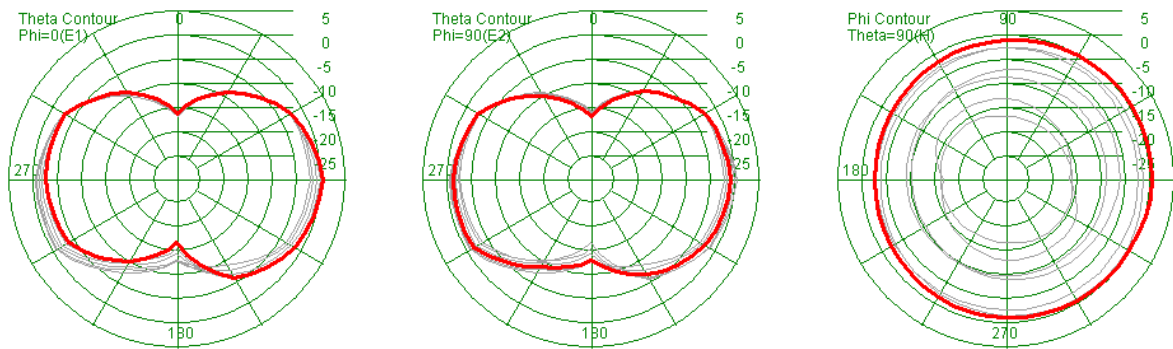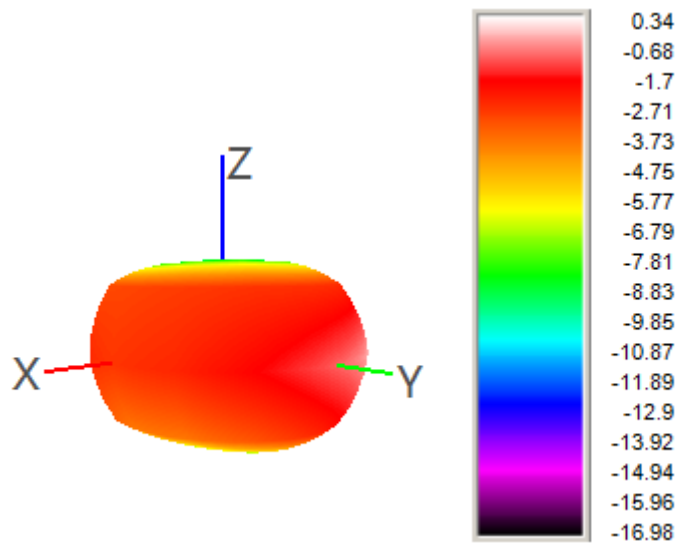


4.6.3. 890 MHz


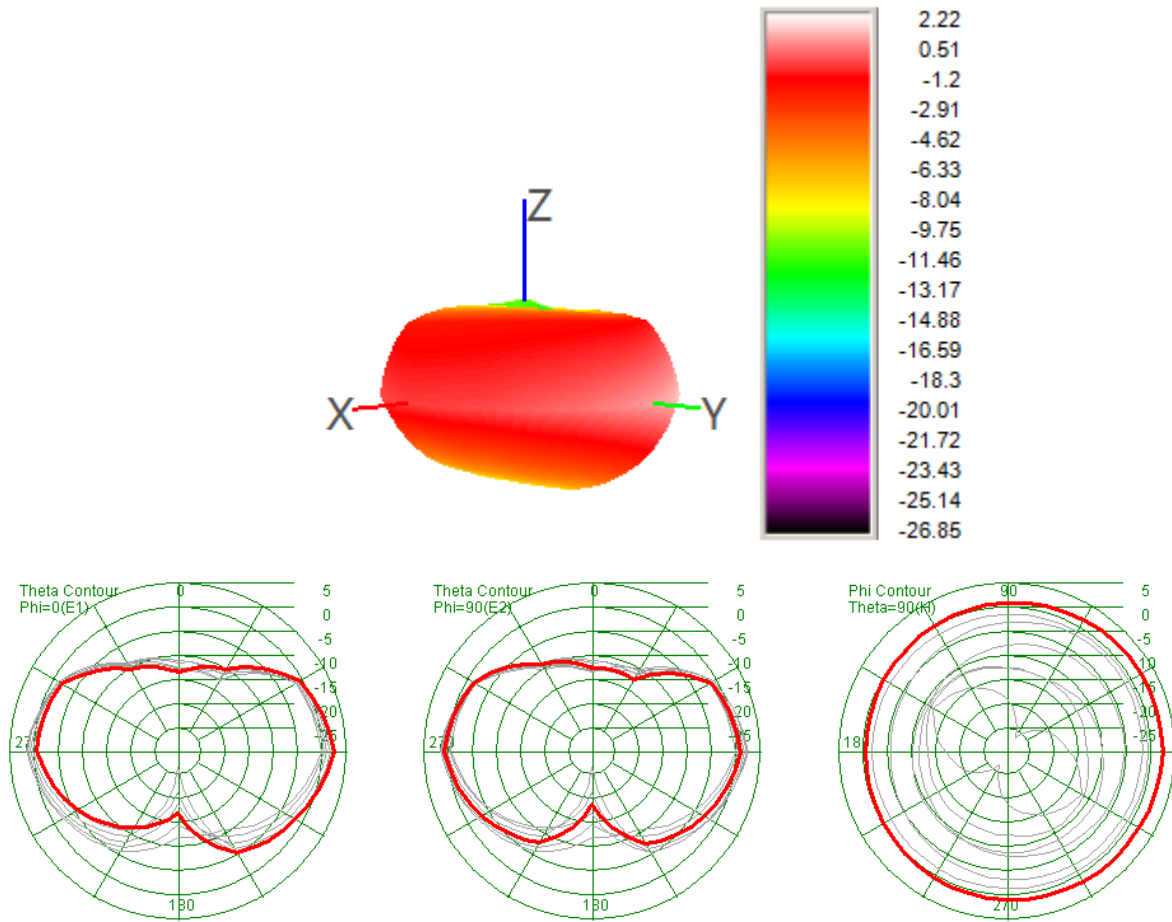


4.6.4. 960 MHz

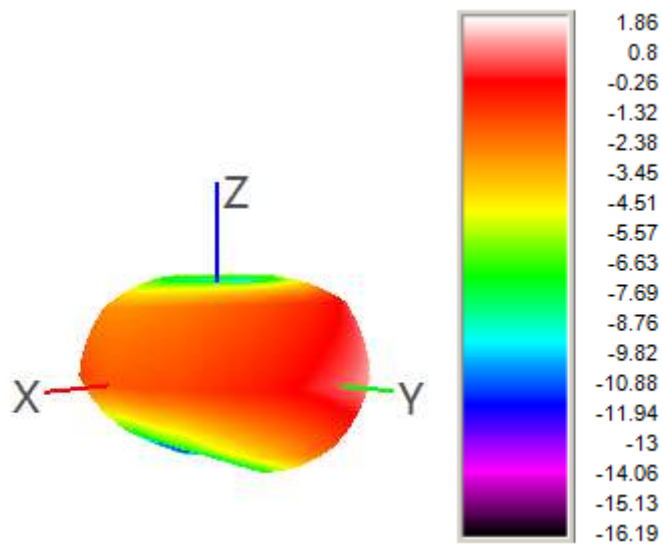

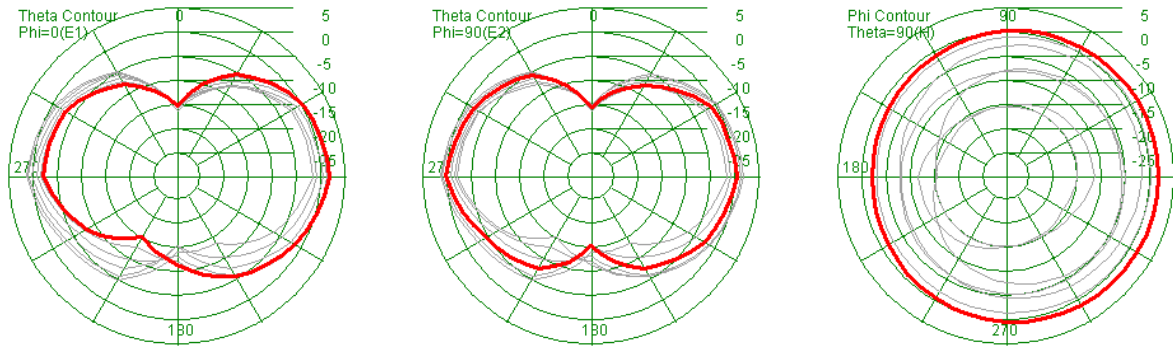


**4.6.5. 1710 MHz**

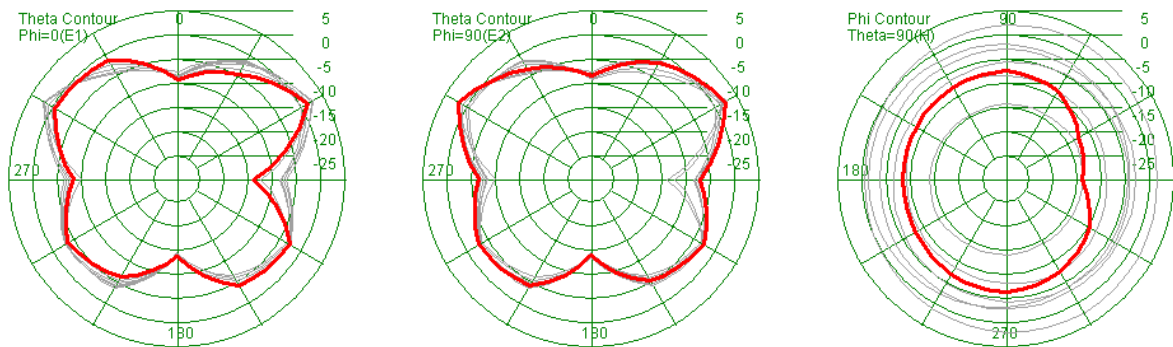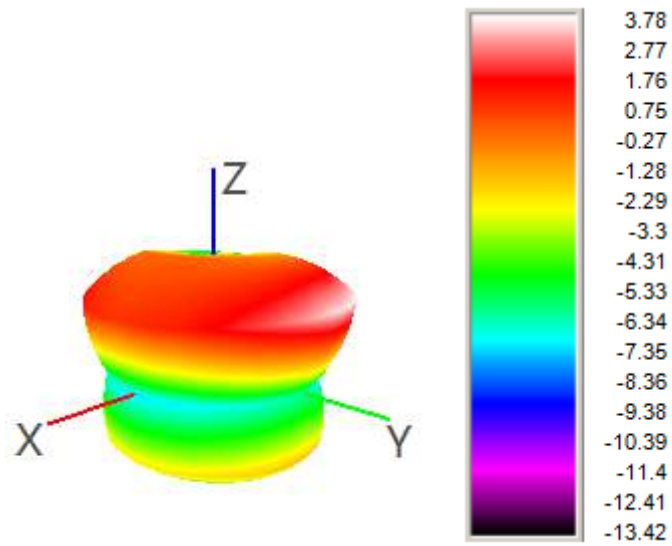







4.6.6. 1810 MHz




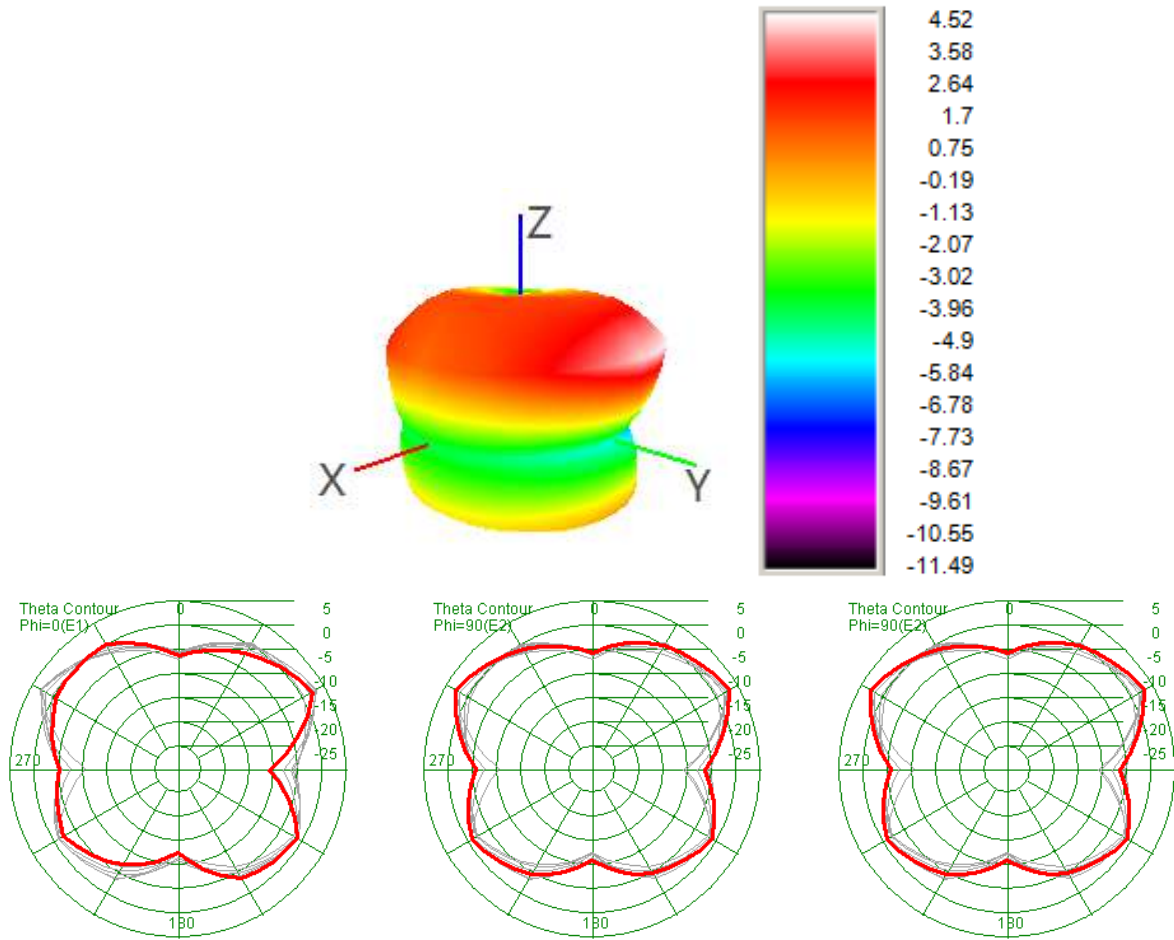


4.6.7. 1910 MHz

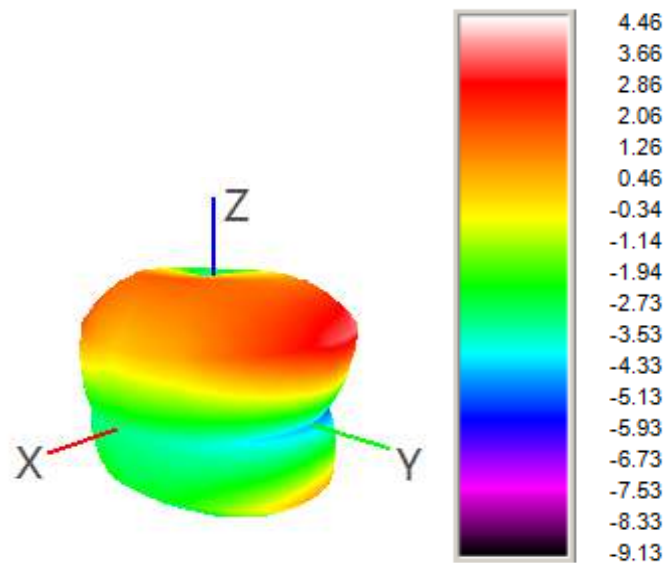


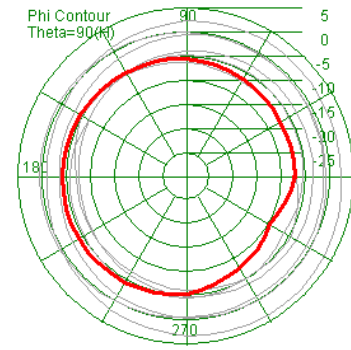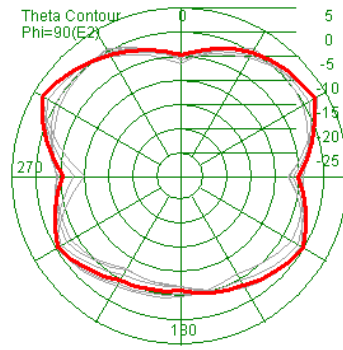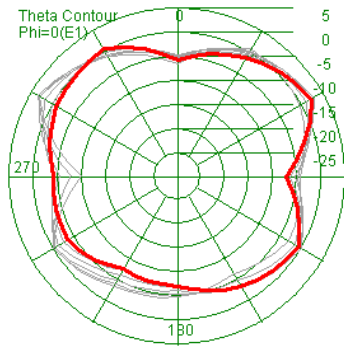


**4.6.8. 1990 MHz**

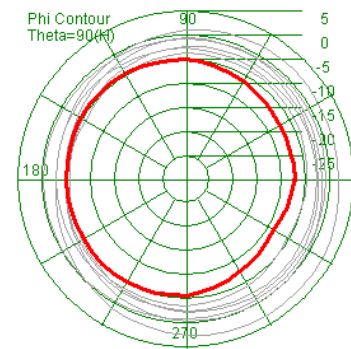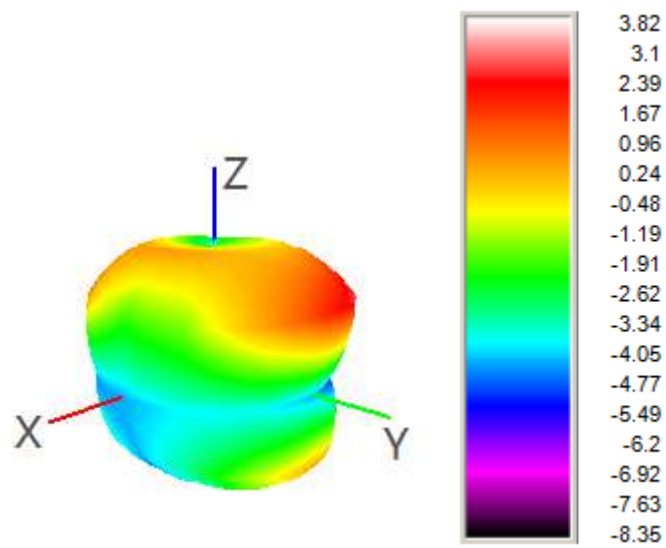


**4.6.9. 2170 MHz**


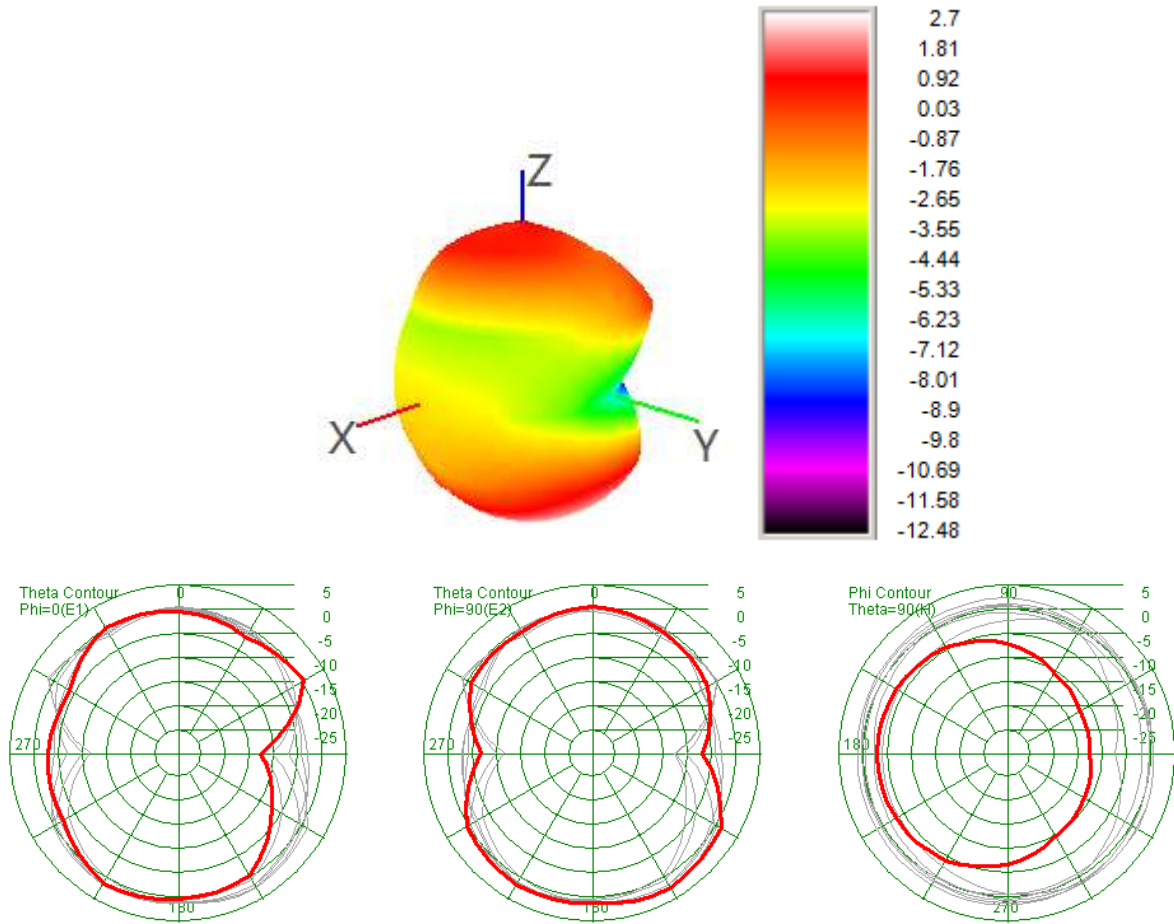


**4.6.10. 2300 MHz**

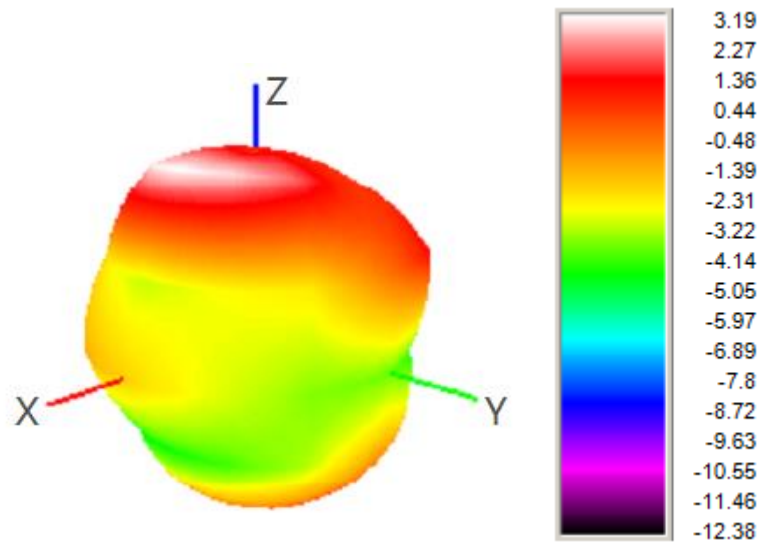


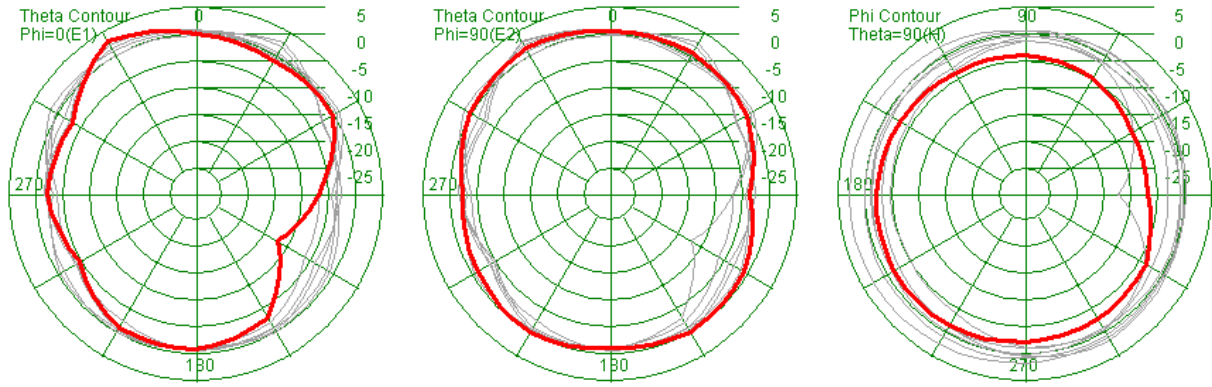


**4.6.11. 2400 MHz**

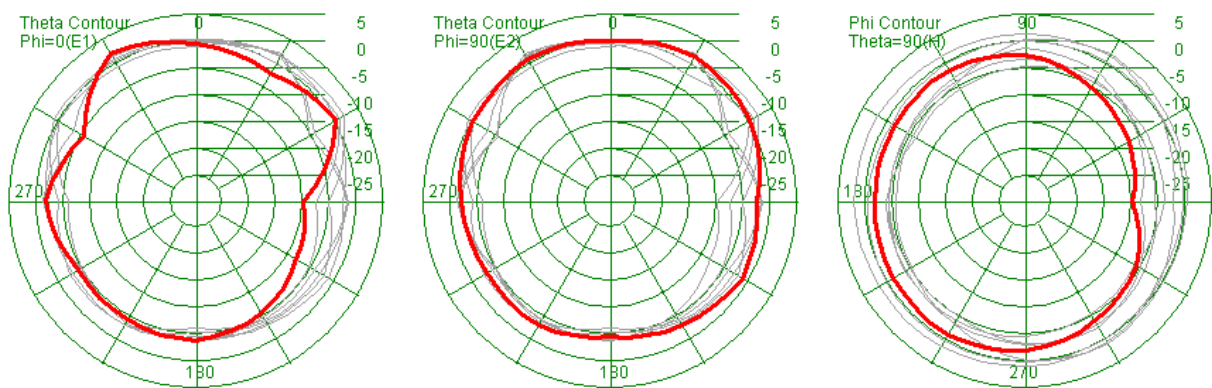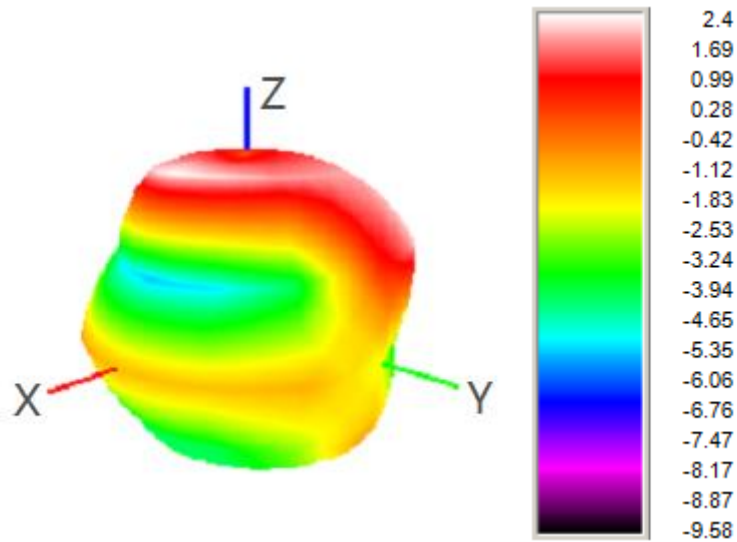


4.6.12. 2500 MHz


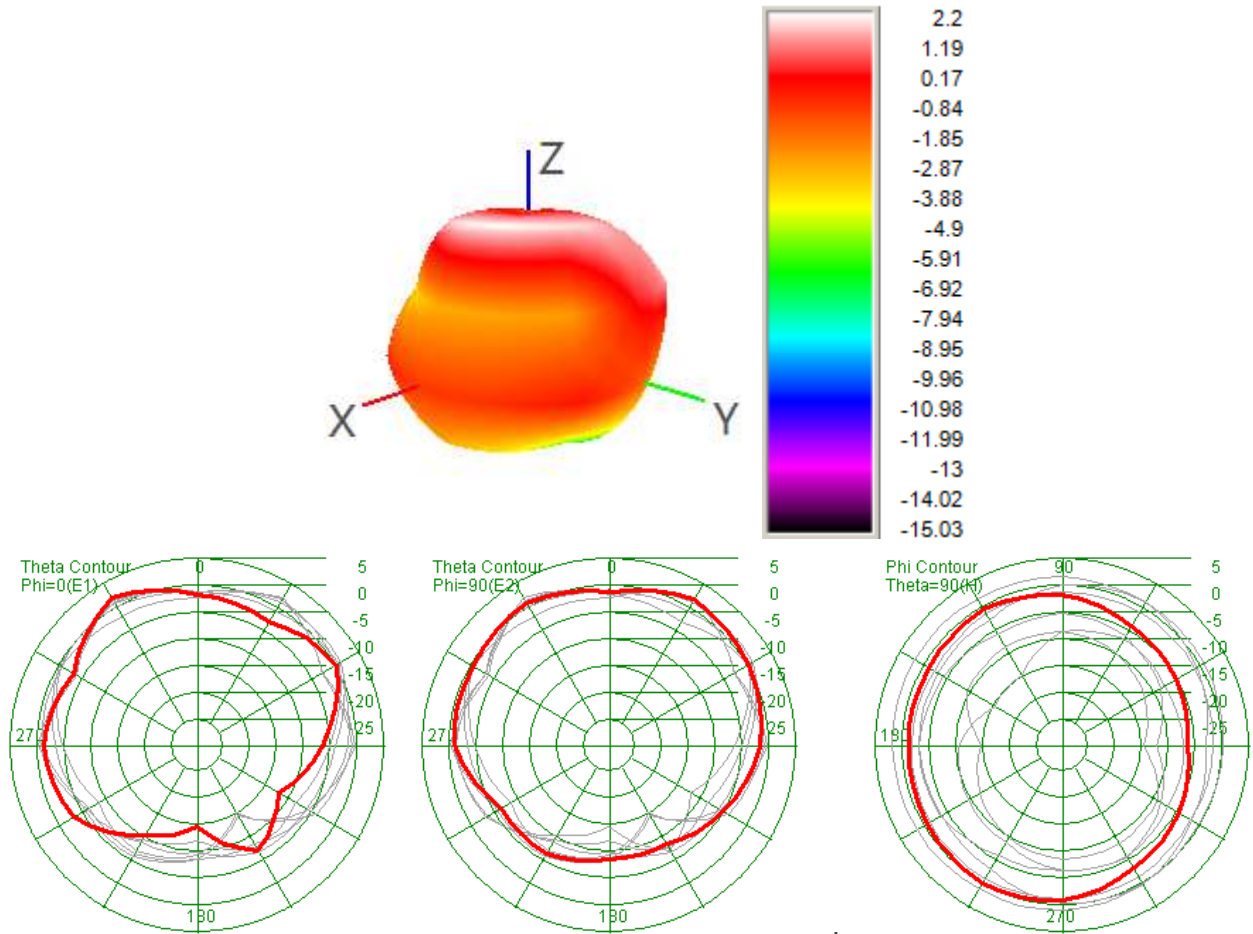


4.6.13. 2600 MHz

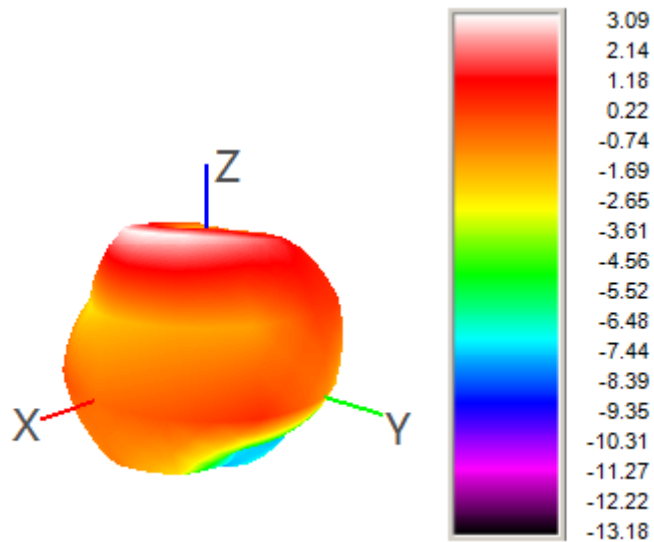

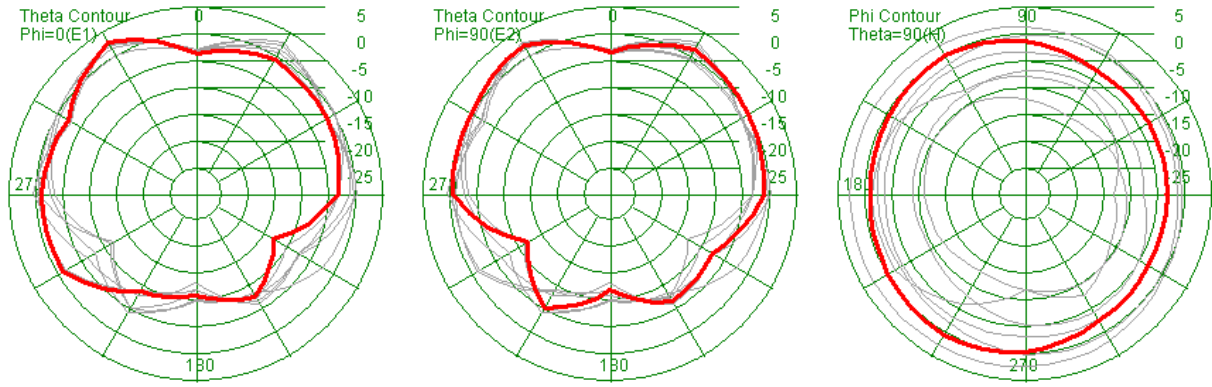


**4.6.14. 2700 MHz**

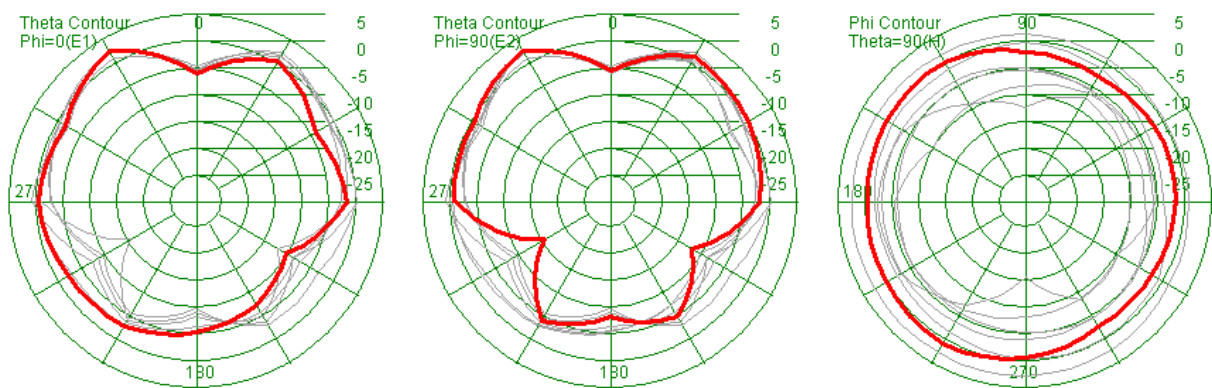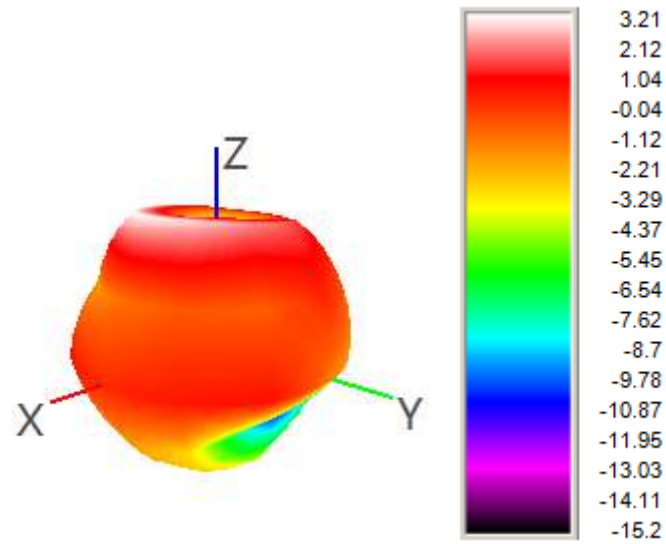

## 5 Schematic Symbol and Pin Definition

The pin assignment for the antenna is as follows. The antenna has 4 pins and only two work. All other pins are designed for mechanical strength.

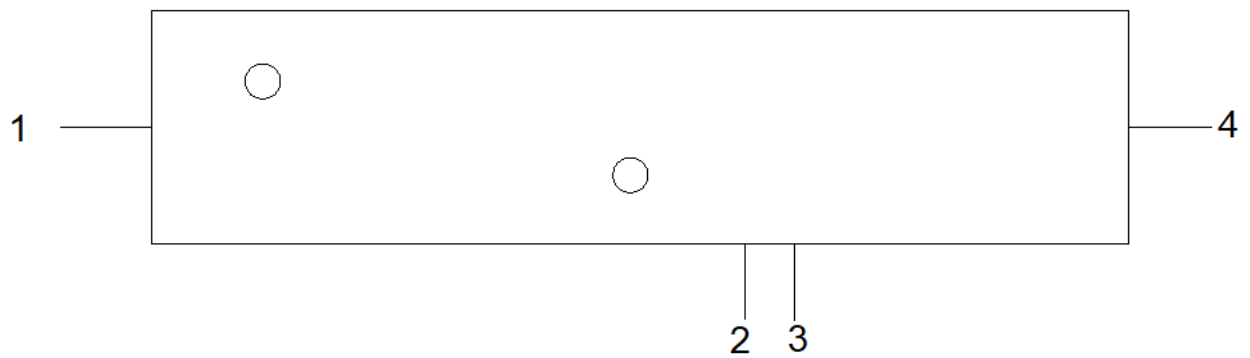


Pin No.	Description
3	Feed
2	Return/GND
1, 4	Not used (mechanical only)

## 6 Transmission Line



The characteristic impedance of all transmission lines shall be designed as 50  $\Omega$ .

- The length of the transmission lines should be kept to as short as possible.
- Any other part of the RF system, such as transceiver, power amplifiers, etc., shall also be designed with an impedance of 50  $\Omega$ .

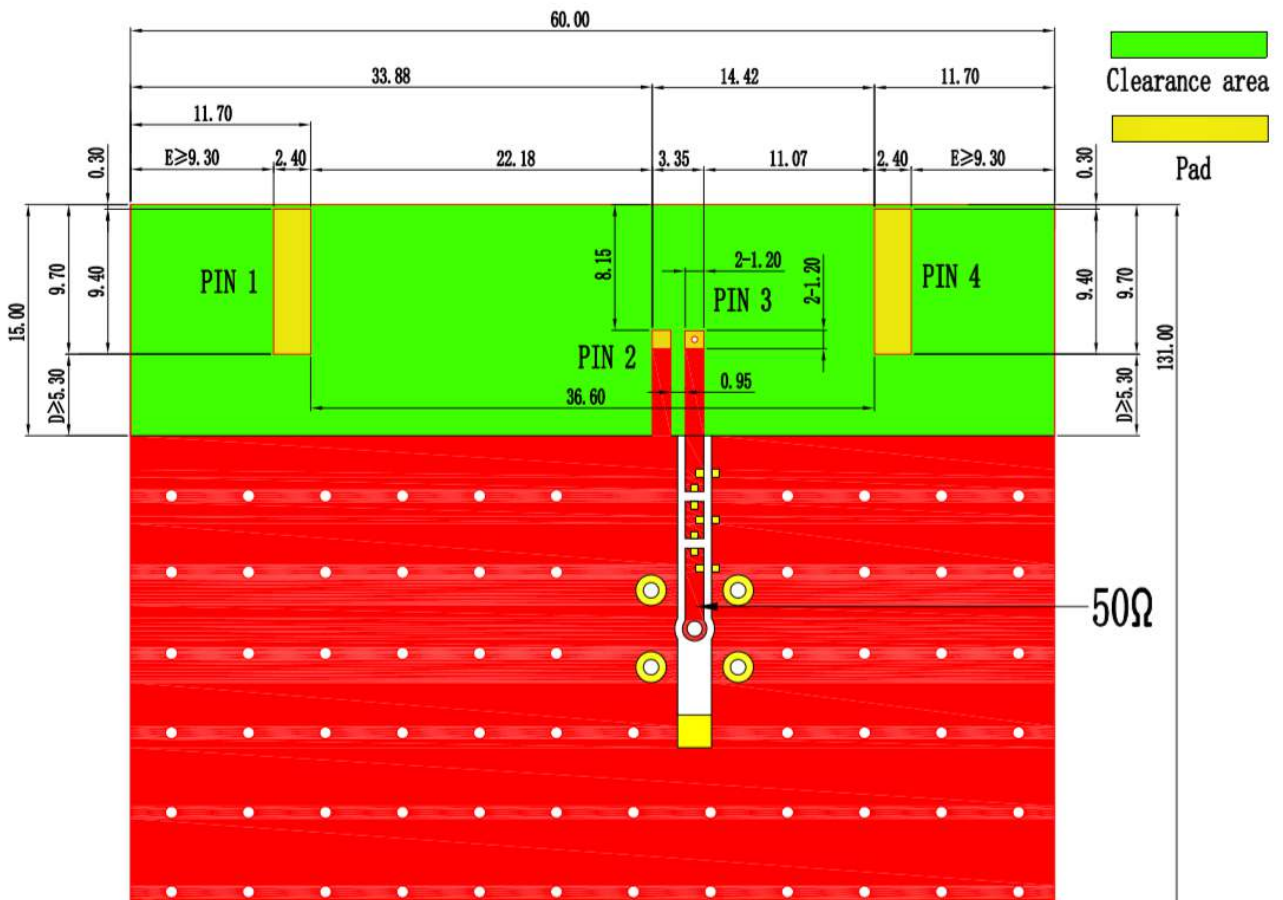



## 7 Matching Circuit

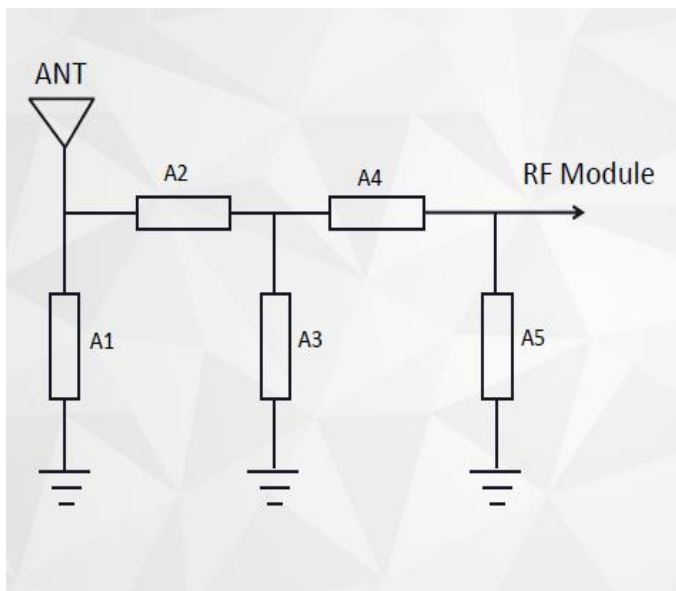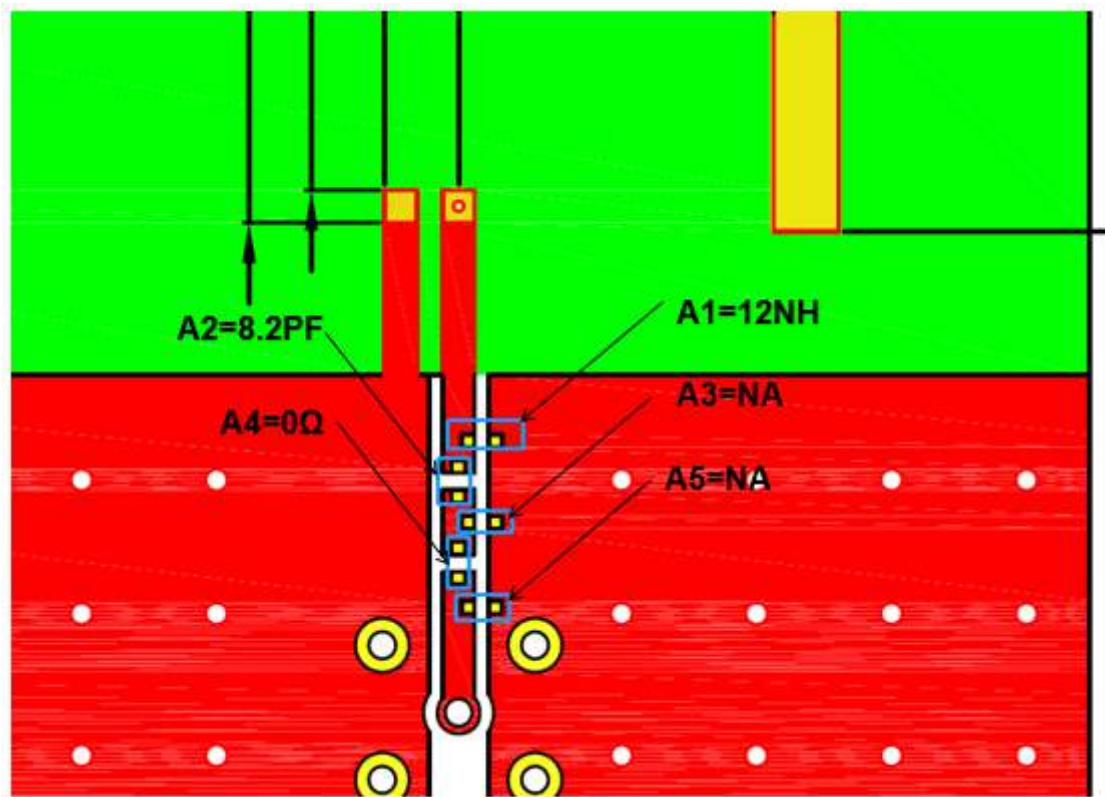


A1	12 nH
A2	8.2 pF
A3	nA
A4	0 Ω
A5	nA

## 8 Host PCB Requirement (unit: mm)

The printed circuit board of the host must ensure that the antenna clearance area meets the antenna specifications. It is suggested to put the antenna in the mid of the PCB.

An example of a PCB layout is shown as below:

**Reference PCB size: 131 mm x 60 mm, clearance area size: 60 mm x 15 mm.**

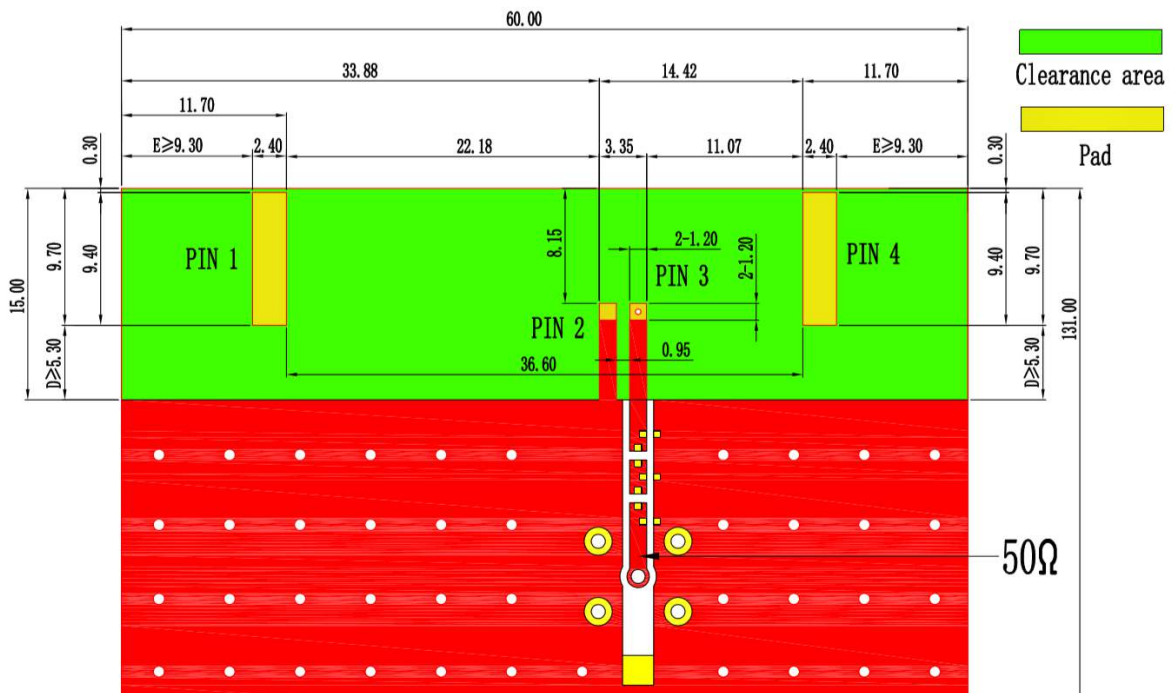


- **Gap D** is required from the edge of the antenna to the ground plane. This should be maintained along the edge of the antenna placement, **minimum value is 5.3 mm.**
- **Gap E** is required from the edge of the antenna to the ground plane or PCB traces, **minimum value is 9.3 mm.**

## 9 Soldering Temperature


Phase	Profile Features	PB-Free Assembly (Max.)
RAMP-UP	Avg. Ramp-up Rate (T <sub>smax</sub> to T <sub>p</sub> )	3 °C/second
PREHEAT	Temperature Min. (T <sub>smin</sub> )	150 °C
	Temperature Max. (T <sub>smax</sub> )	180 °C
	Time (T <sub>smin</sub> to T <sub>smax</sub> )	120 seconds
REFLOW	Temperature (TL)	210 °C
	Total Time above TL (tl)	50 seconds
PEAK	Temperature (T <sub>p</sub> )	260 °C
	Time (t <sub>p</sub> )	10 seconds
RAMP-DOWN	Rate	5 °C/second

## 10 Reflow Profile

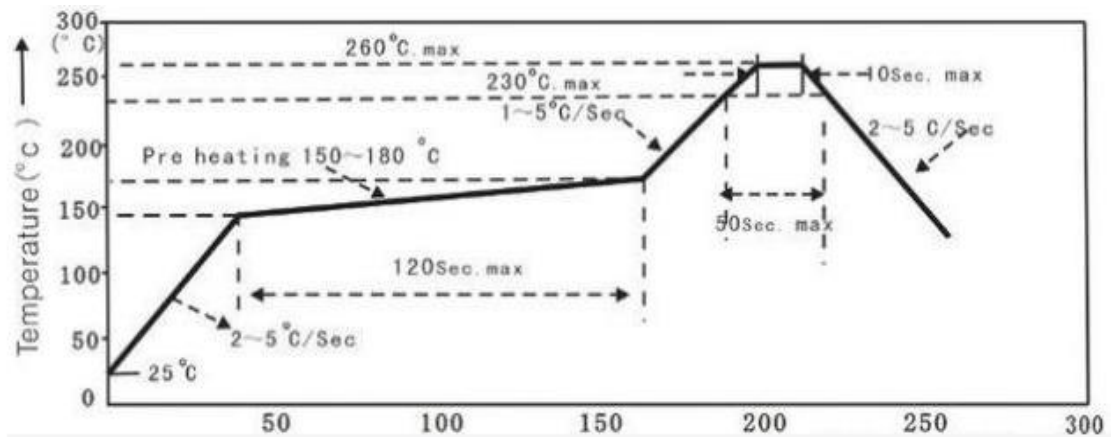


## 11 Package


- Quantity/Reel: 1100 pcs/Reel
- Carrier tape dimensions (mm)

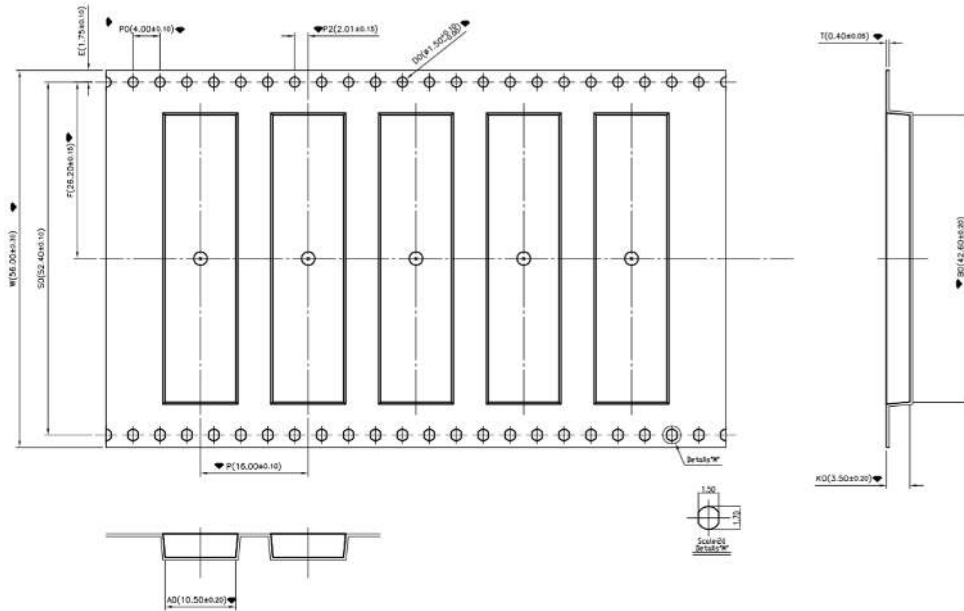

- Taping reel dimensions: 330 mm × 56.4 mm

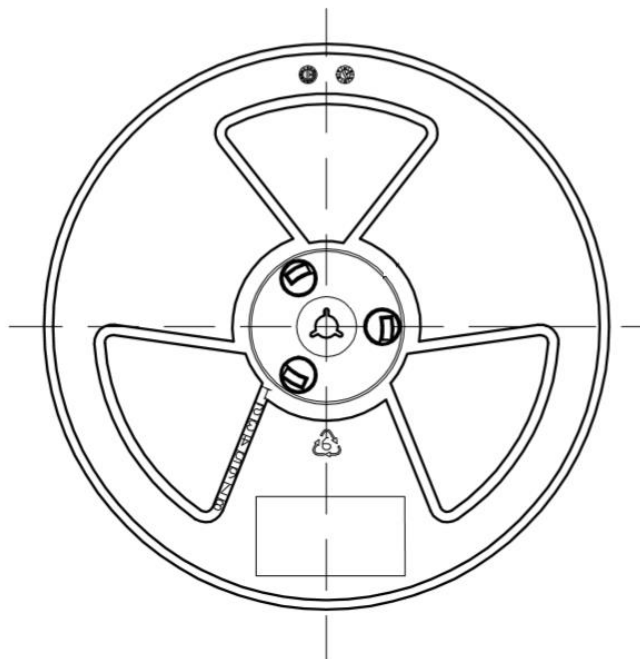

## 12 Product Size (unit: mm)

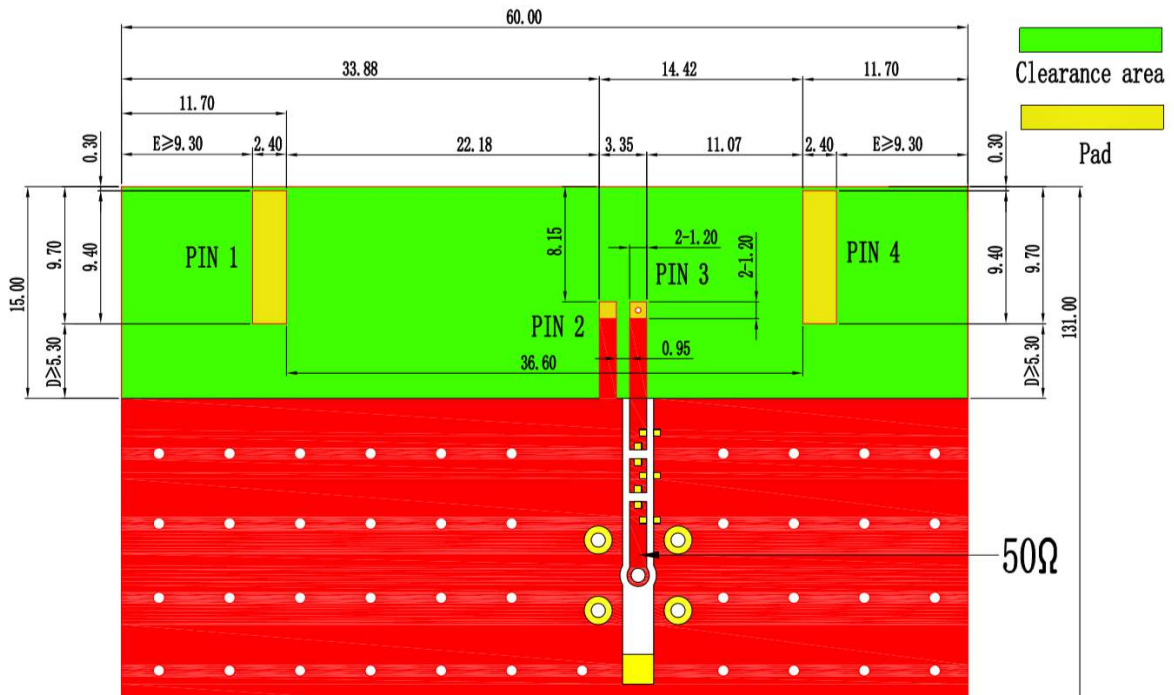

PCB Reference

