

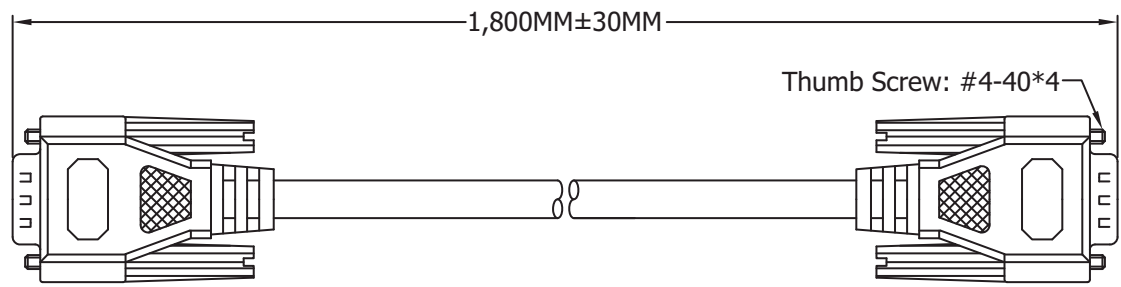


A  
B  
C  
D  
E  
F  
G  
H

HDB 15 Male  
Plastic: Blue



HDB 15 Male  
Plastic: Blue



**Material:**


.CABLE:28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER  
 JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*4C+  
 INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN  
 WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
 COLOR:BEIGE OD:Ø8.1± 0.15mm UL-2919

.CONNECTOR:  
 P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL  
 (9TH PIN UNLOAD)

.SHIELD:COPPER-FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID  
 .HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.

.ELECTRONIC TEST:  
 <1>.100% OPEN SHORT & MIS WIRE TEST  
 <2>.CONTACT RESISTANCE 3 OHMS MAX.  
 <3>.INSULATION RESISTANCE 1M OHMS MIN/ DC 5V

.PACKING:SEE P-0039 REV.C PACKING DRAWING  
 (HANKING SIZE MUST BE SMALLER THAN PACKING)  
 PACKING TYPE: DB VP4.

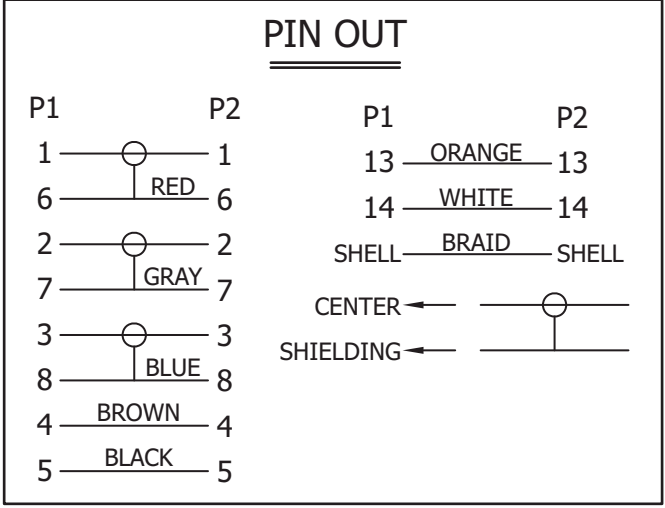

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.16.11	<b>AK5320-1.8-R</b>
X.X	±0.40				Approved		
X.XX	±0.25						Title
X.XXX	±0.15						Premium VGA Monitor connection cable - HD D-Sub 15 pin Male <=> Male, 1.8 Meters
Angle	±3°						Drawing No.
							<b>rev00</b>
							Replace
							Sheet

