


**ELECTRICAL TEST:**

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:5 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

- 1.3FT and 6FT Conforming to DP1.2 standard
- 2.3FT and 6FT Support 4K\*2K@60Hz
- 3.10FT and 15FT Conforming to DP1.1 standard
- 4.10FT and 15FT Support 4K@30Hz

L	P/N
915±30MM	MDPDP-03F-MM
1830±30MM	MDPDP-06F-MM
3050±40MM	MDPDP-10F-MM
4575±50MM	MDPDP-15F-MM

**PIN Assignment**

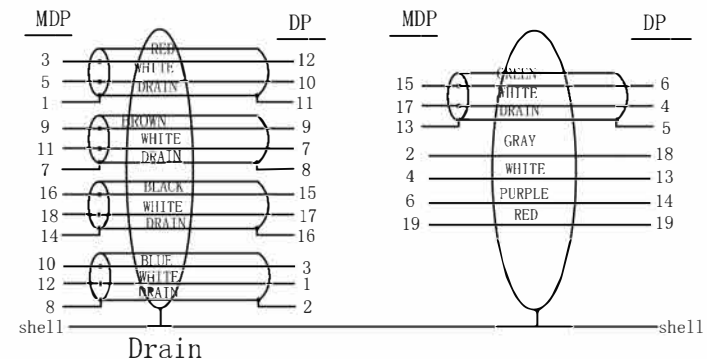

NO	DESCRIPTION	Q'TY	UNIT
11	copper-foil:W=20MM 25u	0.06	M
10	DisplayPort TRANSPARENT DUST COVER	1	pcs
9	DisplayPort M ABS shell~without~DP~LOGO Color:white	1	pcs
8	DisplayPort M bottom ABS shell Color:white	1	pcs
7	mini DisplayPort Transparent dust cover	1	pcs
6	MINI DP M ABS shell Color:white	1	pcs
5	Outside Molding: 45P PVC Color:white	10	g
4	Inside Molding: transparent PE	3	g
3	MINI DP M white rubber core~shell gold plated~pin gold plated	1	pcs
2	DisplayPort Port M ~automatic solder~black rubber core~shell gold plated~pin gold plated	1	pcs
1	DP~UL20276~[32AWG (7/0.08TC)*1PR+EAM]*5+32AWG (7/0.08TC)*5C+D(BC)+AB 85% (16/7/0.12AL) ●:4.8MM Color:white	L	M

TOLERANCE				TITLE:		
INCHES	M/M			MINI DP M TO DP M		
.X	.015	.30		CUSTOMER :		
.XX	.010	.10	CUSTOMER P/N :	MDPDP-xxF-MM	DRAWING NO.:	REV. A1
.XXX	.005	.05	DRAWN BY	Hong		
CHECK BY			SCALE	NONE		
APPD BY			UNIT	MM		
			DATE	2019.04.10		