


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	J2	REVISED PER ECO-12-001427	27JAN12	KH MM

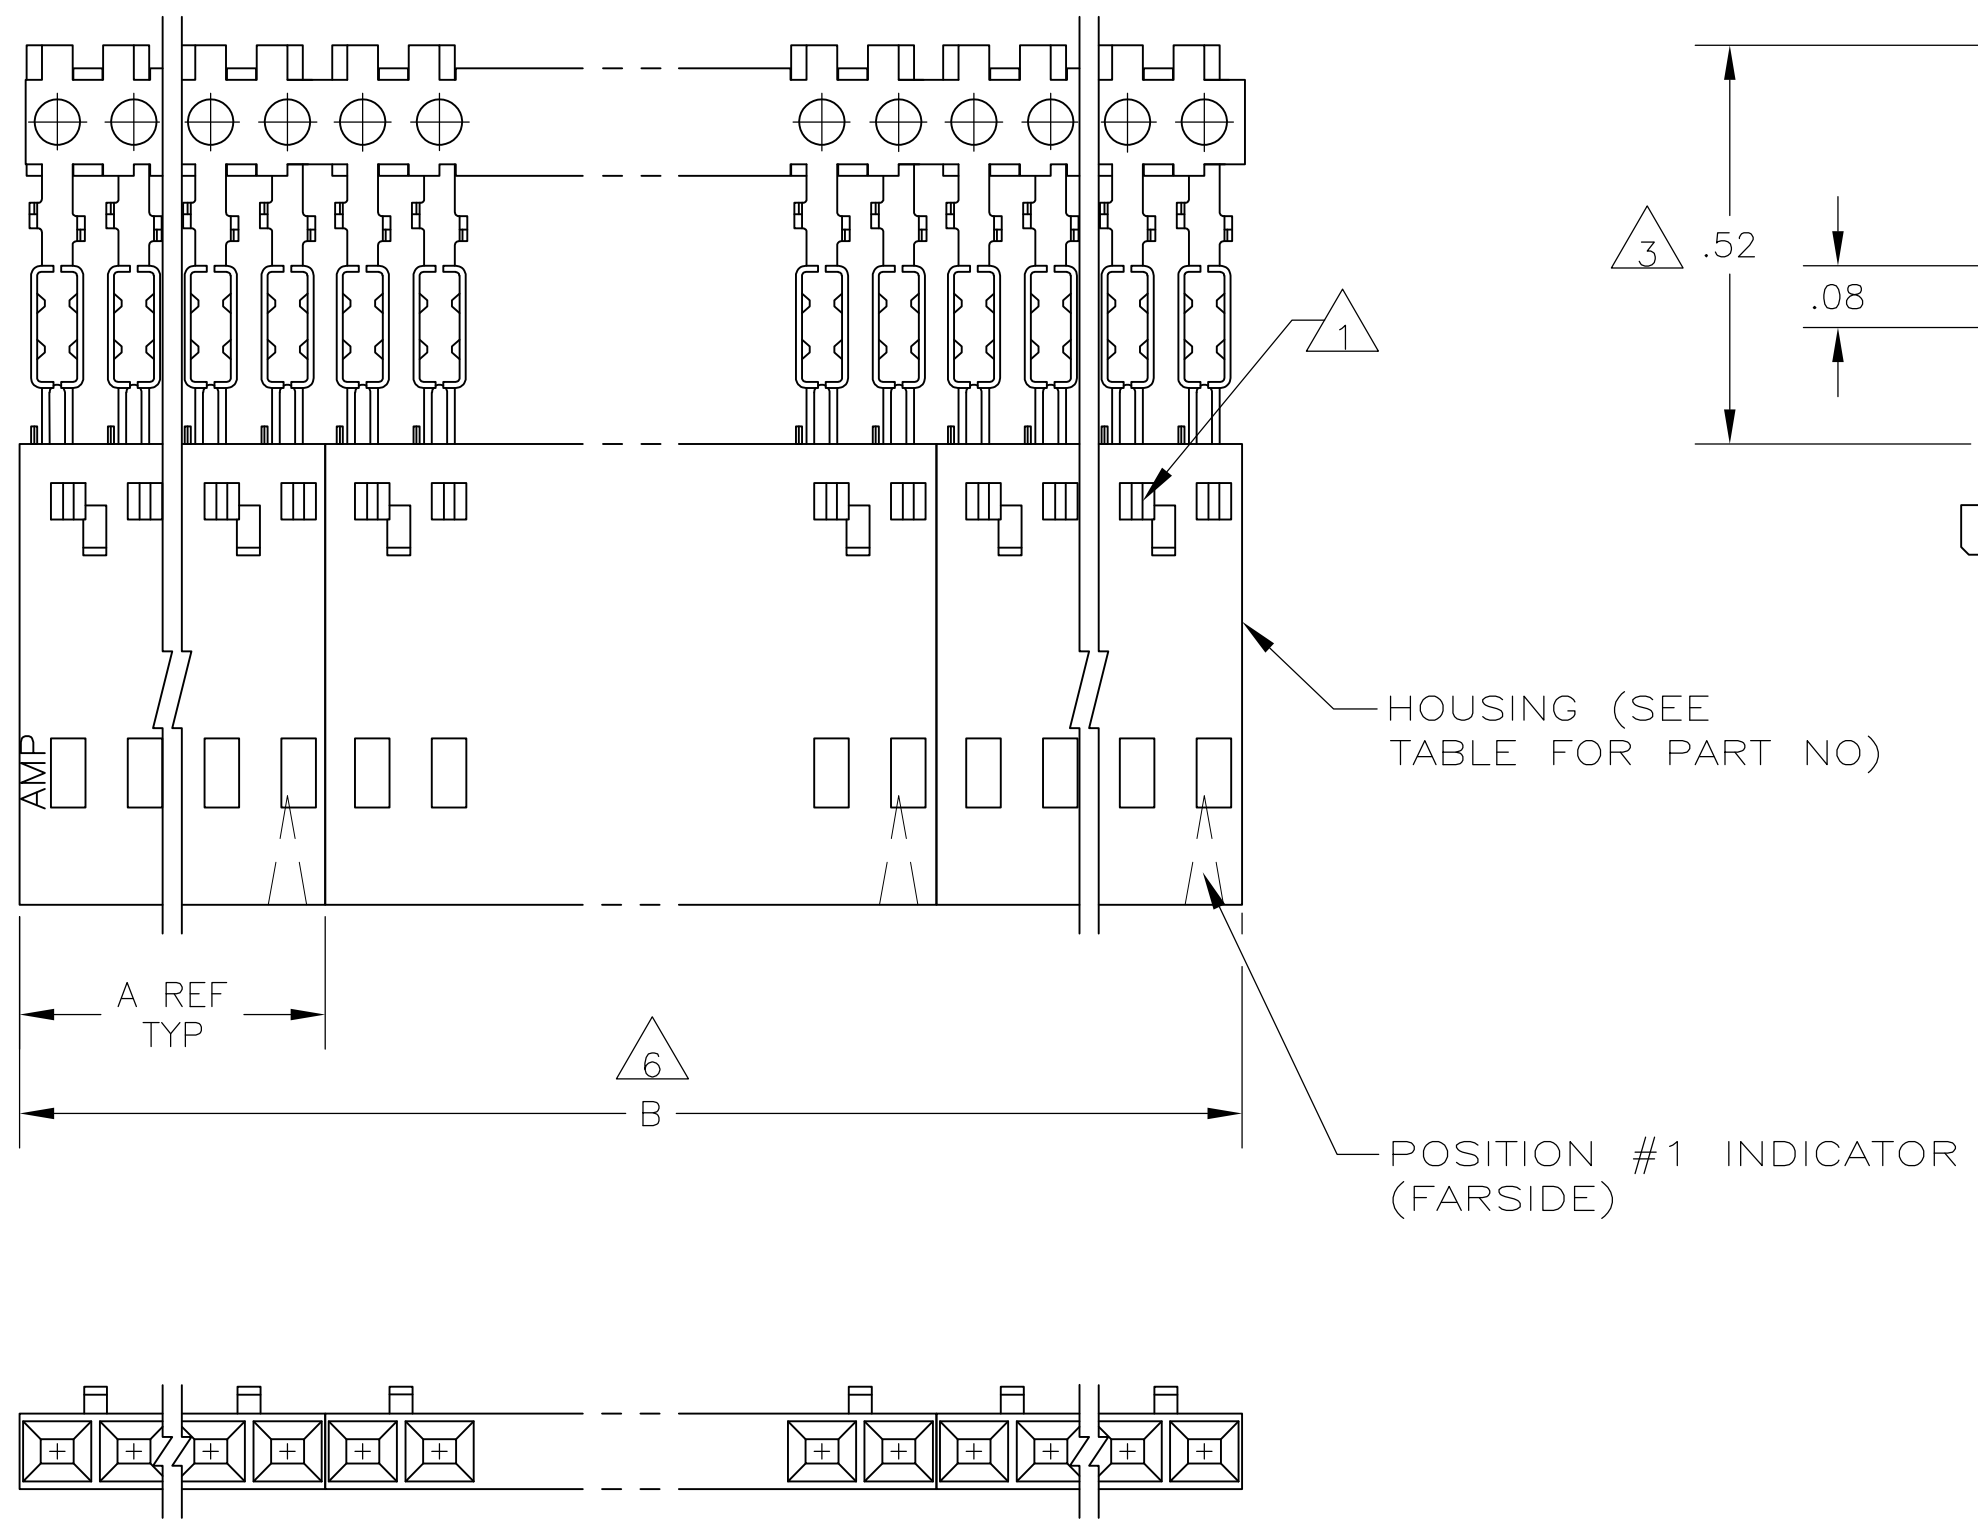

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO)

POSITION #1 INDICATOR (FAR SIDE)

9	8	2	2.40	1.198	1-104503-1	12	6-103950-1
OBSOLETE	8	2	2.20	1.098	1-104503-0	11	6-103950-0
OBSOLETE	8	2	2.00	.998	104503-9	10	5-103950-9
OBSOLETE	8	2	1.80	.898	104503-8	9	5-103950-8
OBSOLETE	8	2	1.60	.798	104503-7	8	5-103950-7
OBSOLETE	8	2	1.40	.698	104503-6	7	5-103950-6
OBSOLETE	8	4	2.39	.598	104503-5	6	5-103950-5
OBSOLETE	8	4	1.99	.498	104503-4	5	5-103950-4
OBSOLETE	8	5	1.99	.398	104503-3	4	5-103950-3
OBSOLETE	8	5	1.49	.298	104503-2	3	5-103950-2
OBSOLETE	8	10	1.98	.198	104503-1	2	5-103950-1
OBSOLETE	7	2	2.40	1.198	1-104503-1	12	1-103950-1
OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103950-0
OBSOLETE	7	2	2.00	.998	104503-9	10	103950-9
OBSOLETE	7	2	1.80	.898	104503-8	9	103950-8
OBSOLETE	7	2	1.60	.798	104503-7	8	103950-7
OBSOLETE	7	2	1.40	.698	104503-6	7	103950-6
OBSOLETE	7	4	2.39	.598	104503-5	6	103950-5
OBSOLETE	7	4	1.99	.498	104503-4	5	103950-4
OBSOLETE	7	5	1.99	.398	104503-3	4	103950-3
OBSOLETE	7	5	1.49	.298	104503-2	3	103950-2
SUPERSEDED	7	10	1.98	.198	104503-1	2	103950-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103654
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 11-5-86  
 CHK P.C.deYONG 11-12-86  
 APVD JEFF SCHEIFFER 11-13-86

TE Connectivity

PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

108-25034  
 114-25026

SIZE A2 CAGE CODE 00779 DRAWING NO C=103950 RESTRICTED TO -

SCALE 4:1 SHEET 1 of 1 REV J2

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR:BLACK; PINS: PHOS BRONZE  
 FINISH: SEE TABLE

DIMENSIONS: INCHES  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ± -  
 1 PLC ± -  
 2 PLC ± .02  
 3 PLC ± .005  
 4 PLC ± -  
 ANGLES ± -

CUSTOMER DRAWING