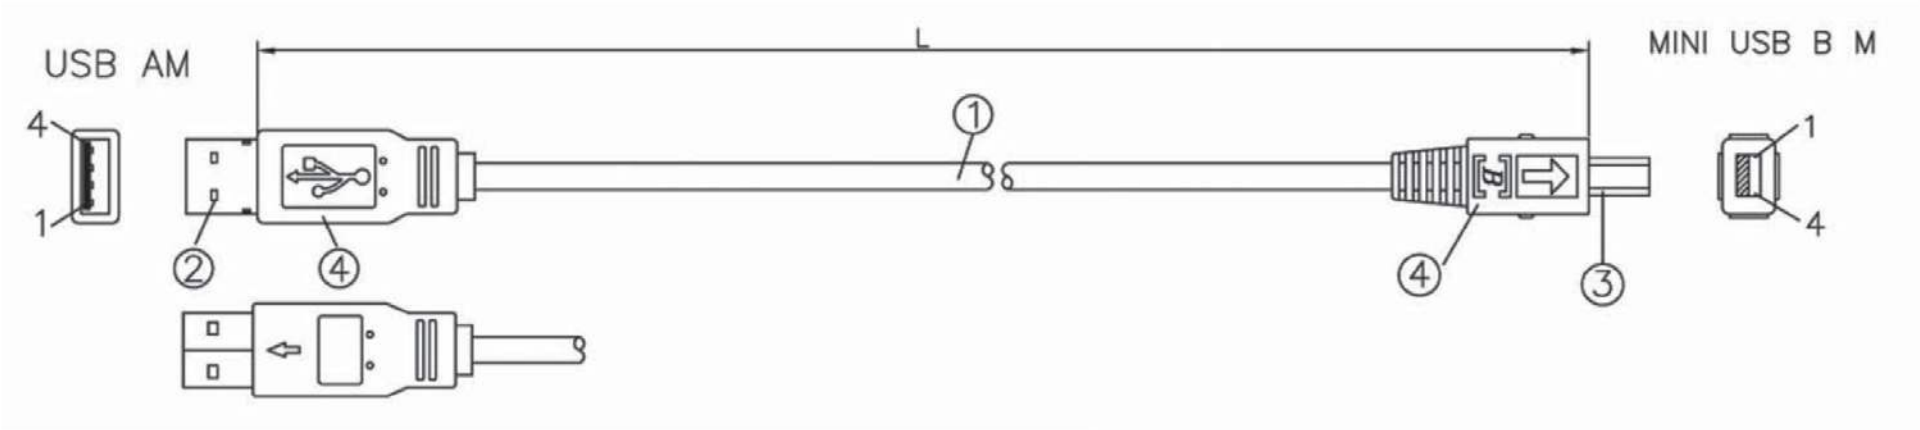

CONFIGURATION:

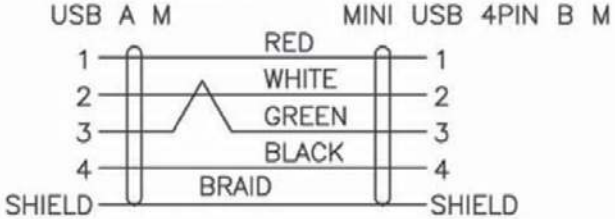

ITEM NO	L
AK670M-1	1000±30MM
AK670M-2	2000±50MM
AK670M-3	3000±50MM
AK670M-5	5000±50MM

ELECTRECAL TEST:

1. 100% SHORT, OPEN, MISWIRE TEST
2. CONDUCT RESISTANCE: X Ohm (MAX.)
   (0<L<3M:X=2; 3M≤L<10M:X=5; 10M≤L:X=10)
3. INSULATION RESISTANCE: 10M Ohm (MIN.)
4. DIELECTRIC TEST: AC 300V

NO.	DESCRIPTION
④	OUTER MOLD:45P PVC COLOR:BLACK(CS-001)
③	CONNECTOR:MINI USB 4P B PLUG SOLDER TYPE 3U"
②	CONNECTOR:USB A MALE SOLDER TYPE 3U" INSULATION:WHITE
①	CABLE:UL20276,28AWG*1P+28AWG*2C+AL/MY+SPIRAL,O.D:3.8MM PVC JACKET COLOR:BLACK(CS-001)

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	08.29.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
AK670M-X (Version 1.1)
AK670M/2-X (Version 2.0)

Title USB 1.1 & 2.0, USB A Male to USB B Mini (4 pin)

Drawing No.

rev00

Replace

Sheet