



UNIT : MM

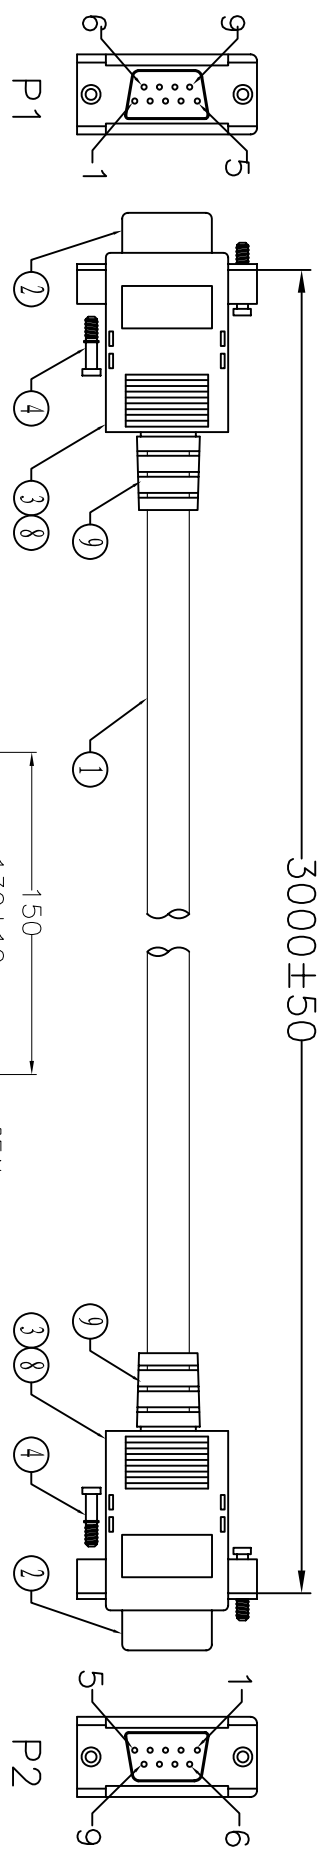

PIN ASSIGNMENT	
P1	P2
1 BLACK	4
2 BROWN	3
3 RED	2
4 ORANGE	1
5 YELLOW	5
6 GREEN	8
7 BLUE	7
8 PURPLE	9
9 SHELL DRAIN	9

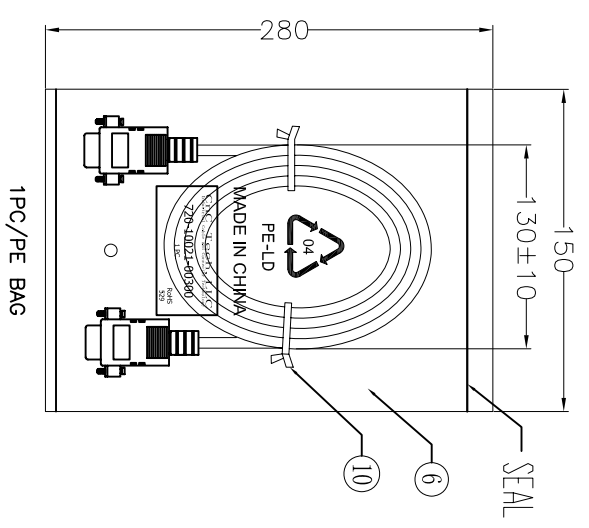

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

⑨	TIE	2	WHITE TIE L=120MM
⑩	S/R	5.5g	BEIGE(IV-29#) 45P PVC (MOULD NO.SR-50)
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20mm
⑥	PE BAG	1/10	CLEAR SIZE:360*380*0.05mm PRINT BLACK"MADE IN CHINA"+10PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"+1PC"及印生产周期,有透气孔.
④	SCREW	4	SCREW #4-40UNC L=12.5mm,NICKEL PLATED
③	DKN	2set	DB9P DKN W/O NUT BEIGE
②	CONN	2	DB 9P FEMALE SOLDER TYPE G/F, BLUE INSULATION,SHELL-NICKEL.
①	CABLE	1	NOUL 30AWG(7/0.10)*8C+D+AL OD5.0mm COLOR BEIGE(IV-29#) L=3000±15MM
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	720-10021-00300
DATE		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECT	

4

3

2

1

A

B

C

D

A

B

C

D