

SIGN	DATE	DESCRIPTION	APPROVER
	2008.06.04	Rev B: Standard material changed from UL94V-2 to UL94V-0	Jimmy
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

Material

- Insulator: Nylon 66
- Flammability: UL94V-0
- Color: Ivory
- Contacts: Brass
- Plating: 120u" Tin over 30u" Nickel

Ratings

- Current: 3A
- Voltage: 250V AC(r.m.s.)
- Contact Resistance: <math><20\Omega</math>
- Insulation Resistance: >1,000 Ω
- Dielectric Withstanding Voltage: 1000V AC for one minute
- Operating Temperature: -55° - +105°

RoHS Compliant


OPTIONS - add to end of p/n

- G - Gold plating
- BK - Black color
- consult factory for other options
- OPTIONS may require MOQ


PART NUMBER:

2600-XX-S



Number of circuits
02-20

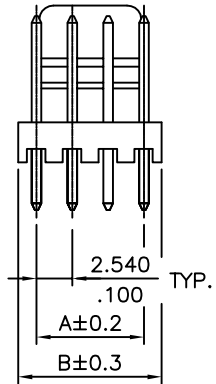

(02 through 05 circuits)

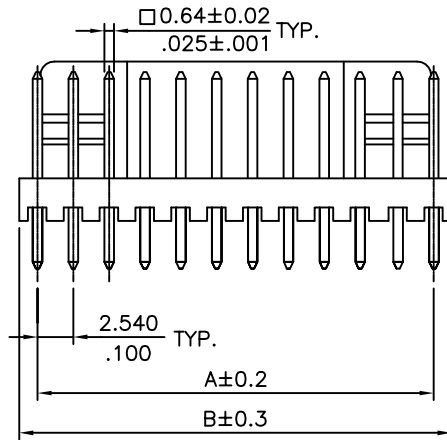

(06 through 20 circuits)

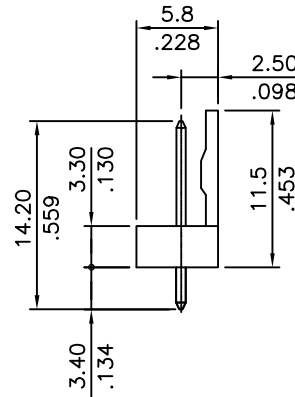

Recommended P.C. Board Layout

$A = 2.54 \times \text{No. of Spaces}$

$B = A + 2.54$

* Available in 02 through 20 circuits



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		2600 Series - 2.54mm single row, vertical friction lock header			
PART NO.	2600-XX-S	DWG NO.	2600-XX-S.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
	Marvin 2001.10.03	Marvin 2001.10.03	Marvin 2001.10.03	Tolerance	
				UNIT: mm/inches	X. ±0.30/.012
				SCALE: NONE	X.X ±0.20/.008
				SHEET: 01/01	X.XX ±0.10/.004
				REV.: B	X° ±1°