


SPECIFICATION CONTROL DRAWING		0024C8422
--------------------------------------	--	------------------

CHEMINAX	100 OHM, AWG 24, 7 STRANDS OF AWG 32, TWINAXIAL CABLE	Date	1-4-08
		Revision	A

THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS	ELECTRICAL CHARACTERISTICS
-----------------------------	-----------------------------------

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

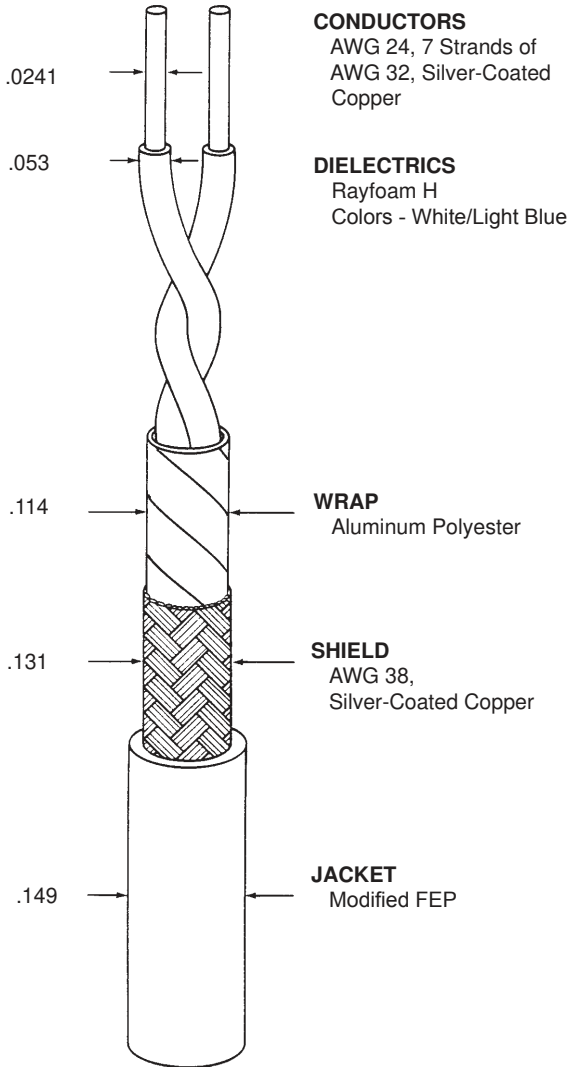

CHARACTERISTIC IMPEDANCE	100 ± 15 ohms from 1 MHz to 100 MHz per TIA 568
MUTUAL CAPACITANCE	13.0 pF/ft. at 1 KHz (nominal)
VELOCITY OF PROPAGATION	76% (nominal)
ADDITIONAL ELECTRICAL REQUIREMENTS ON PAGE 2	

ADDITIONAL REQUIREMENTS

<u>ELECTRICAL</u>	
CONDUCTOR RESISTANCE	23.9 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000 ft.
JACKET FLAWS	
SPARK TEST	1.0 kV (rms)
IMPULSE TEST	6.0 kV (peak)
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)

<u>ENVIRONMENTAL</u>	
FLAMMABILITY	Method B
HEAT SHOCK	225°C
LOW TEMPERATURE-COLD BEND	-55°C/4.00 inch mandrel
VOLTAGE WITHSTAND (Post Environmental)	1000 volts (rms), 1 minute

<u>PHYSICAL</u>	
INSULATION (DIELECTRIC) (Prior to Cabling)	
ELONGATION	50% (minimum)
TENSILE STRENGTH	600 lbf/in ² (minimum)
JACKET	
ELONGATION	200% (minimum)
TENSILE STRENGTH	2000 lbf/in ² (minimum)
JACKET THICKNESS	.009 inch (nominal)
SHIELD COVERAGE	95% (minimum)
WRAP	.002 inch thick (nominal) 25% overlap (minimum) Aluminum side facing out

Outer jacket color will be translucent white (designated by a "-9X" appended to the part number, e.g. 0024C8422-9X) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

WEIGHT	17.6 lbs/1000 ft. (nominal)
--------	-----------------------------

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

The TE logo, Tyco Electronics, Cheminax, Raychem and Rayfoam are trademarks.



Raychem Wire & Cable
501 Oakside Avenue
Redwood City, California 94063-3800
1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

TABLE I. ELECTRICAL PARAMETERS			
Frequency (MHz)	Insertion Loss dB/100m (maximum)	Return Loss dB/100m (minimum)	Propagation Delay ns/100m max
1.0	2.4	20.0	570
4.0	4.9	23.0	552
8.0	6.9	24.5	547
10.0	7.8	25.0	545
16.0	9.9	25.0	543
20.0	11.1	25.0	542
25.0	12.5	24.2	541
31.25	14.1	23.3	540
62.5	20.4	20.7	539
100.0	26.4	19.0	538

Note: Values are for reference only. Actual values shall be determined utilizing the formulas in ANSI/TIA-568-B.2.