### NOTES:

#### I. MATERIALS AND FINISHES:

CONTACT - BRASS, GOLD PLATED

BODY - BRASS, WHITE BRONZE PLATED
SLEEVE - BRASS, WHITE BRONZE PLATED
FERRULE - COPPER, WHITE BRONZE PLATED
CAP - BRASS, WHITE BRONZE PLATED

OUTER CONTACT - PHOSPHOR BRONZE, WHITE BRONZE PLATED

INSULATOR - PTFE, NATURAL

#### 2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE = DC to 6 GHz

C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

D. VSWR = 1.15 +.03F

#### 3. MECHANICAL:

A. OPERATING TEMPERATURE = -65°C to +165°C

B. INTERFACE = PER AMPHENOL RF SPEC. 349-50692

C. CONTACT RETENTION = 6.0 LBS. AXIAL

#### 4. CABLE ASSEMBLY INSTRUCTIONS PER:

A. TRIM CABLE AS SHOWN


0.5 - 6mm

B. INSERT CABLE INTO R/A ENTRY W/ BRAID OVER KNURLED AREA, FOIL UNDER

C. CRIMP FERRULE W/ .151" HEX


D. SOLDER CENTER CONDUCTOR TO CONTACT THROUGH ACCESS HOLE

E. DEPRESS EXPANSION CAP IN ACCESS HOLE.

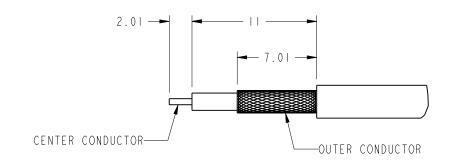

# RECOMMENDED CABLE STRIPPING DIMENSIONS

6 - 30mm 30 - 120mm ANGLES

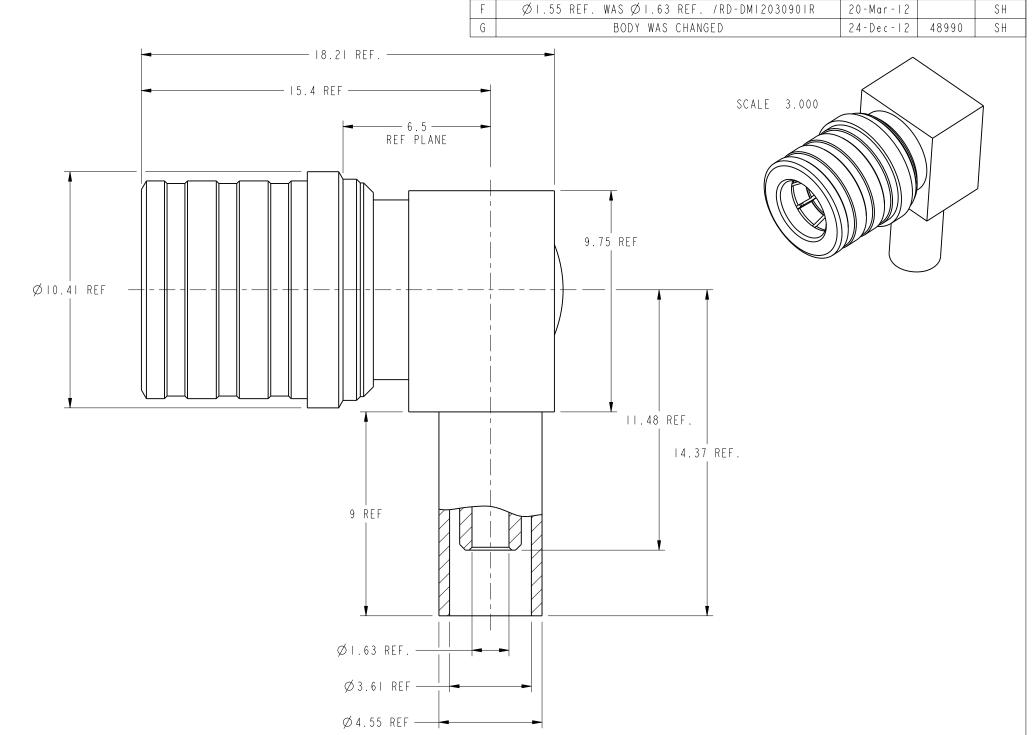

REV

THIRD ANGLE PROJ. 🕀 🖯

## CUSTOMER OUTLINE DRAWING

REVISIONS

DATE

21-Mar-03

28-Mar-II

ECO

48509

APPR

CPM

SH

DESCRIPTION

RELEASE TO MFG.

E | BODY, CONTACT PIN AND FERRULE'S PN WERE CHANGED

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

$\pm$ 0.05mm	$\pm$ 0 . $I$ mm	±0.2mm	± 0.3mm	±1°
NOTICE - These	drawings, specifi	ications, or other	data (I) are, and	d remain the
property of Amp	henol corp. (2)	must be returned	upon requiest; and	l (3) arre
			n other than those	
			se drawings, speci	
			son to anyone for	
not to be regar	ded by implication	oin or otherwise i	n any manner licer	nsing, granting
rights to permi	tting such holder	or any other spe	rson to manufactur	e, use or sell any
				way be related to
or disclosed by	said drawings, s	specifications, or	other data.	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

MATERIAL	DRAWN T.DENG	D A T E 2 4 - D e c - 1 2
	ENGINEER S.LI	DATE 24-Dec-12
REFERENCE EAR #944 GEN #ASSYMI_QMA 61.5X-1909-100 CONFIGURATION LEVEL: FINISH	APPROVED S.HSIEH	DATE 24-Dec-12
	CAD FILE	

T I T L E		
QMA 50 0	HM R/	A PLUG
FOR RD-3	16 TYF	ÞΕ
CABLE		
CALE: 6.0:1.0	SHEET 2	OF 2
DWG SIZE	REV	

Am	phenol RF	
w w w	.amphenolrf.com	
DRAWING NO.	930-114P-51A	
ITEM NO.	930-114P-51A	
PART NO.	930-114P-51A	