


COIL: @ +25 °C  
 RESISTANCE 27 OHMS ± 10%  
 NOMINAL VOLTAGE 5.0 VDC  
 MUST OPERATE 2.7 VDC  
 MUST RELEASE .29 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

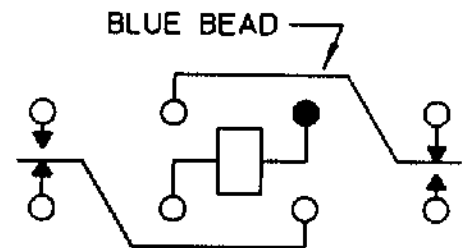

CONTACT RATING: LOW LEVEL TO  
5 AMPS 28 VDC RESISTIVE  
100,000 OPERATIONS MIN.

DR. R.B. 5/3/95 CK. 5/3/95


**COMMUNICATIONS  
INSTRUMENTS, INC.**

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE HFW5A RELAY

HFW5A1201L00