



断面 X-X  
SECTION X-X

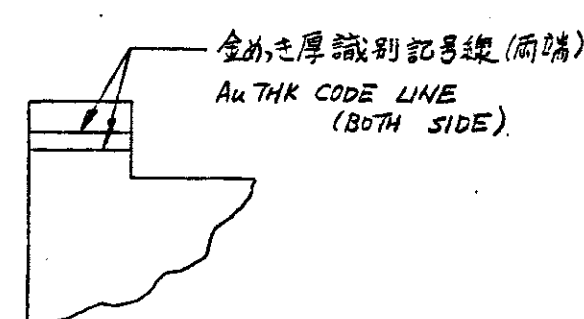

矢視 Z  
VIEW Z

断面 Y-Y  
SECTION Y-Y

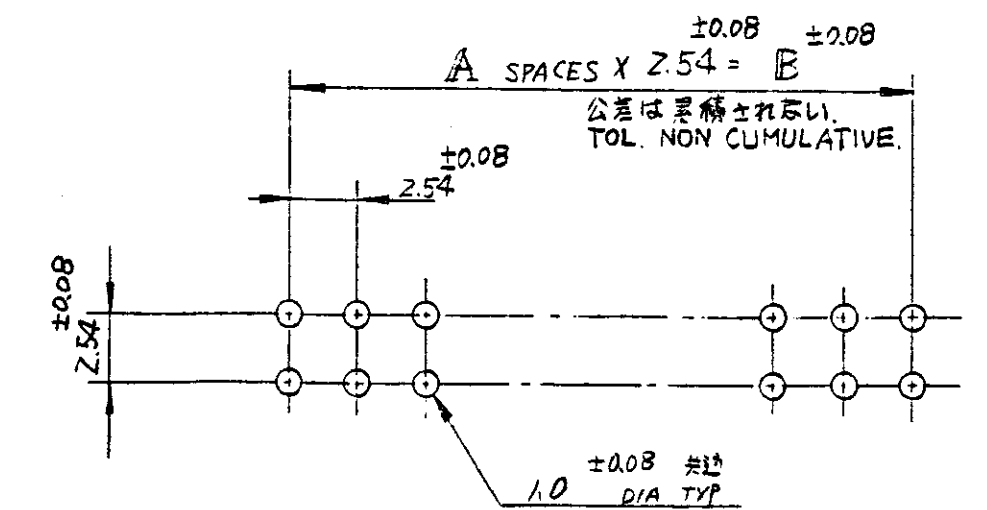

プリント基板推奨穴位置  
RECOMMENDED HOLE LAYOUT

- NOTES:
- FINISH: T THK GOLD PLATED IN AREA "A" AND 0.0010 MIN TIN LEAD PLATED IN AREA "B" ON 0.0013 MIN ALL OVER THE NICKEL.
  - PRODUCT SPEC: 108-25017
  - MATE WITH: □-173281-□, 102584-□, 102585-□, 102667-□
  - OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 注記:
- ポストの仕様; 接触部(エリアA)金めきT厚, Ni下地めき0.0013 MIN. 半田付91%部半田めき0.001 MIN.
  - 製品規格番号: 108-25017
  - 嵌合相手型番: □-173281-□, 102584-□, 102585-□, 102667-□.

TYPE	THK	AVE	162.1	160.0	149.86	59	120	2-173282-6
Z LINE	0.00076 MIN		136.7	134.6	124.46	49	100	-5
			111.3	109.2	99.06	39	80	-4
			98.6	96.5	86.36	34	70	-3
			73.2	71.1	60.96	24	50	-2
Z LINE	0.00076 MIN		40.1	38.1	27.94	11	24	2-173282-1
1 LINE	0.0001 AVE		162.1	160.0	149.86	59	120	1-173282-6
			136.7	134.6	124.46	49	100	-5
			111.3	109.2	99.06	39	80	-4
			98.6	96.5	86.36	34	70	-3
			73.2	71.1	60.96	24	50	-2
1 LINE	0.0001 AVE		40.1	38.1	27.94	11	24	1-173282-1
OBSOLETE	NONE	0.00038 MIN	73.2	71.1	60.96	24	50	173282-6
			162.1	160.0	149.86	59	120	-5
			136.7	134.6	124.46	49	100	-4
			111.3	109.2	99.06	39	80	-3
			98.6	96.5	86.36	34	70	-2
			40.1	38.1	27.94	11	24	173282-1

AMP Tyco Electronics AMP K.K. Kawasaki, Japan

HEADER ASSEM, SHROUDED MOD II 254x  
254 GRID, STD POSTS (WITH POLARIZING LUGS)

SIZE: G, LUG: J, DWG NO: C-173282

1 OF 1 SHEET, REV: C1

PROJ 951-120

ALL DIMENSIONS IN MM, DO NOT SCALE PRINT

REV	DESCRIPTION	DATE	BY	CHK
C1	REVISED PER ECO-09-022424		KK	AEG
C	REVISED FDD-0183-99		H.T	KA
B	ADDED ITEMS		JE	ETI
B	ADDED 50ms		JE	ETI
A	REVISED		JE	ETI
O	RELEASED		JE	ETI