

SMD Power Inductor 0415CDMC/DS



Halogen Free

Description

- Magnetically shielded.
- L × W × H: 4.75 × 4.35 × 1.5 mm Max.
- Product weight: 0.15g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 4500pcs per reel


Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, SSD and other low profile high current application.

Dimension - [mm]

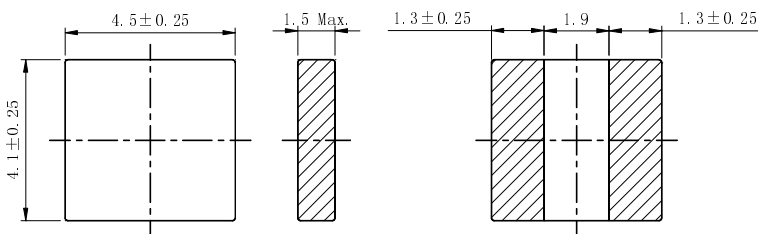

Land pattern and Schematics - [mm]

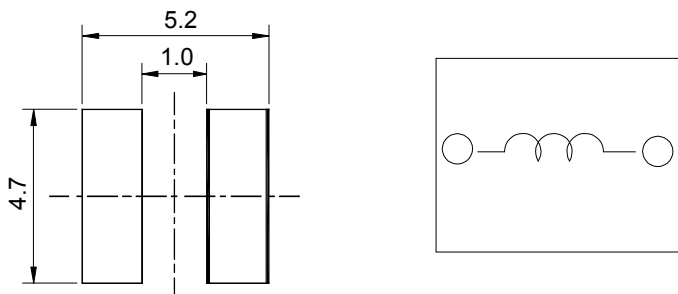

Electrical Characteristics

Part Number	Stamp	Inductance (μ H) [within] ※1	D.C.R (m Ω) [within] (at 25°C)	Saturation Current [Typ.] (A) ※2	Temperature rise Current [Typ.] (A) ※3
0415CDMCDS-1R0MC	1R0	1.0 \pm 20%	30 \pm 20%	8.0	4.5

※1. Inductance measuring condition: at 100kHz.


※2. Saturation current: The value of DC current when the inductance is over 80% of the initial value. (at 25°C)

※3. Temperature rise current: The actual value of DC current when the top surface temperature of test sample rise is $\Delta T=40^\circ\text{C}$ ($T_a=25^\circ\text{C}$).



SMD Power Inductor 0415CDMC/DS



Saturation Current & Temperature Rise Graph

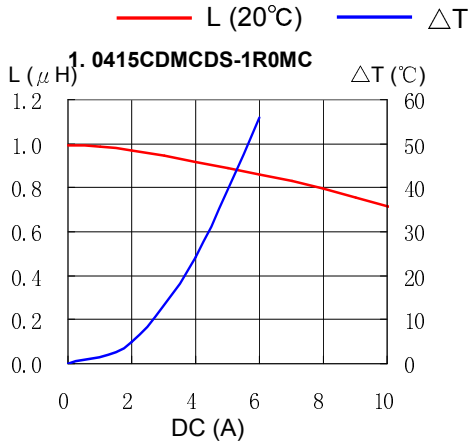

Solder Reflow Condition

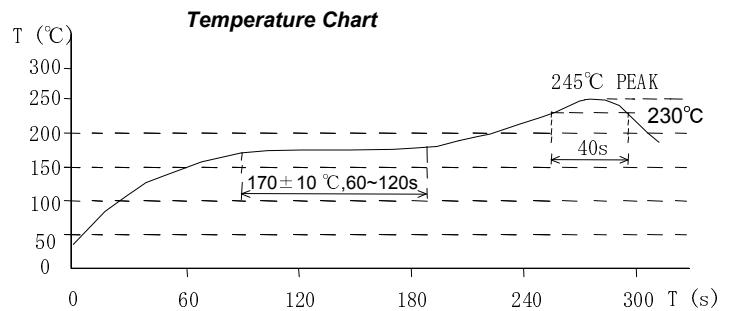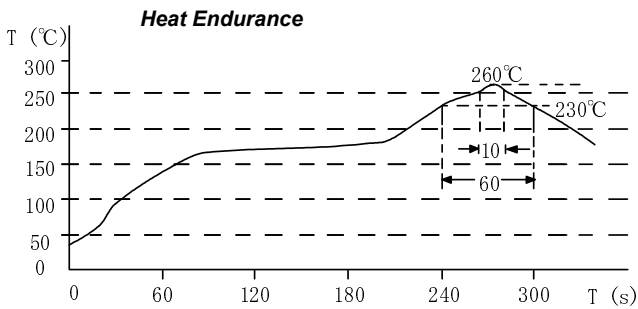

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com