




Technical Data Sheet for PL036-4-30

Single-Stage Thermoelectric Module

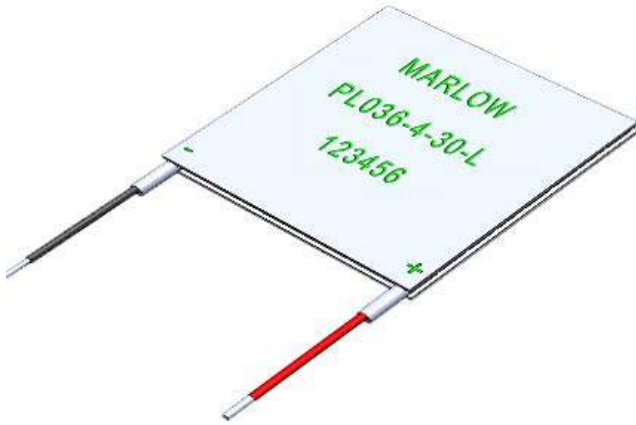

NOMINAL PERFORMANCE IN NITROGEN

| | | |
|---------------------------|------|------|
| Hot Side Temperature (°C) | 27 | 50 |
| ΔT_{max} (°C): | 66 | 74 |
| Q _{max} (watts): | 36 | 39 |
| I _{max} (amps): | 3.7 | 3.7 |
| V _{max} (vdc): | 14.7 | 16.4 |
| AC Resistance (ohms): | 3.2 | -- |

PRODUCT FEATURES

- RoHS EU Compliant
- Rated operating temperature of 130°C.
- Ceramic Material: Aluminum Oxide
- Porchless configuration for reduced footprint.
- Superior nickel diffusion barriers on elements.
- High strength for rugged environment.
- RTV sealing option available.
- Lapped option available for multiple module applications.

ORDERING OPTIONS

| Model Number | Description |
|-----------------|---------------------------|
| PL036-4-30-01 | Leadwires |
| PL036-4-30-01S | Leadwires, Sealed |
| PL036-4-30-01L | Leadwires, Lapped |
| PL036-4-30-01LS | Leadwires, Lapped, Sealed |

OPERATION CAUTIONS

For maximum reliability, storage and operation below 130°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

INSTALLATION

Recommended mounting method: Clamp with uniform pressure to a flat surface with thermal interface material. For additional information, please refer to our TEM Installation Guide.

II-VI Marlow – Dallas, TX USA
214-340-4900
877-627-5691
marlow.sales@ii-vi.com

Marlow Industries Europe
GmbH - Germany
+49 (0) 6150 5439 - 403
info@marlow-europe.eu

II-VI Japan Inc.
81 43 297 2693 (tel)
center@ii-vi.co.jp
www.ii-vi.co.jp


II-VI Singapore Pte., Ltd.
(65) 6481 8215 (tel)
info@ii-vi.com.sg

Marlow Industries China, II-VI
Technologies Beijing
86-10-643 98226
info@iivbj.com




TYPICAL PERFORMANCE CURVES

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

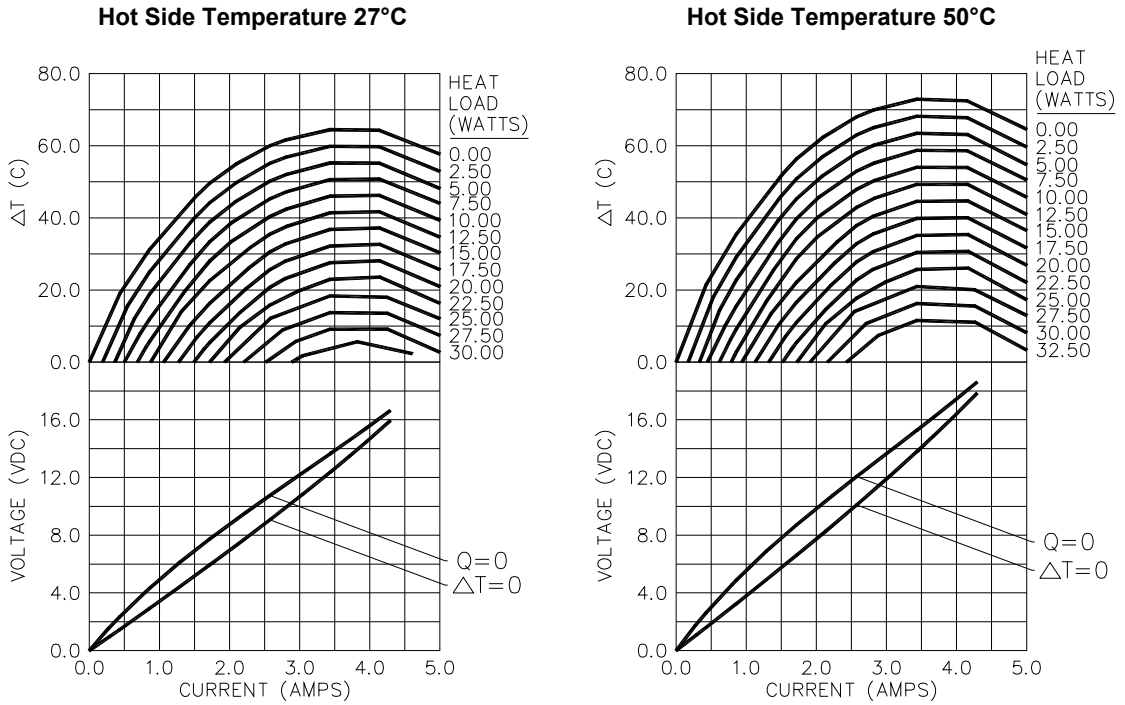

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, contact one of our Applications Engineers at 877-627-5691.

MECHANICAL CHARACTERISTICS

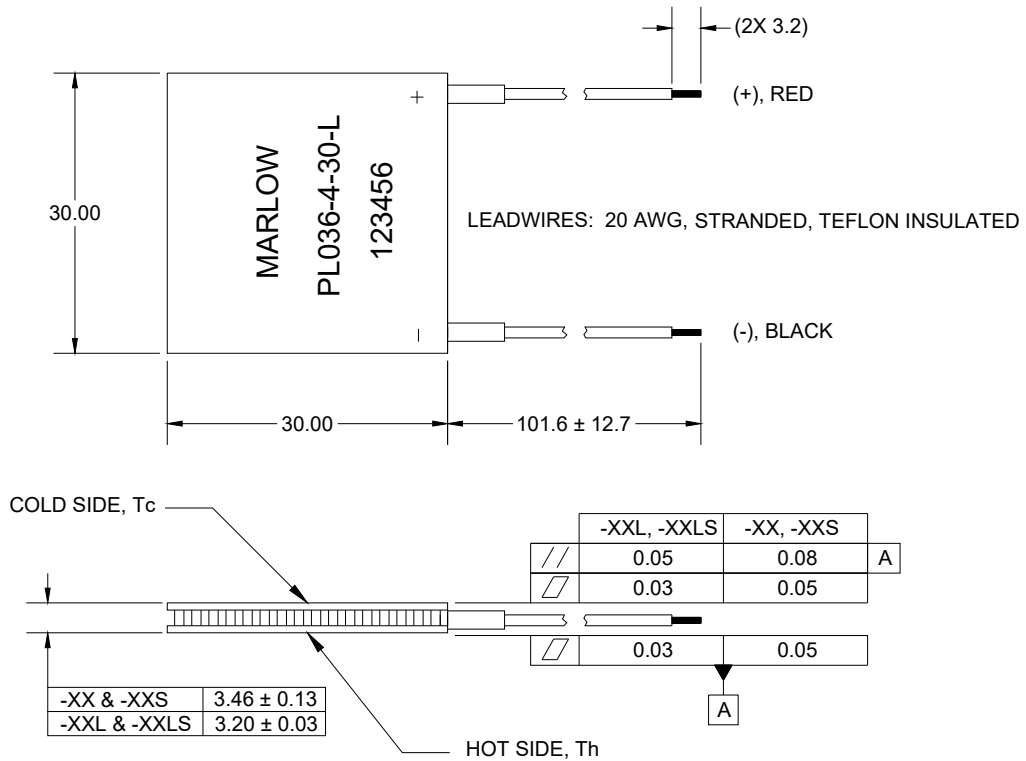

All units are in millimeters unless otherwise stated.

For customer support or general questions please contact a local office or visit our website at www.marlow.com.
Marlow reserves the right to make product changes without notice.