


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 0565 & P/N 0148/0
INSULATOR: HEAT SHRINK TUBING. BLACK
CONTACT: GOLD PLATED ANCONDA OR BOILCAT
2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

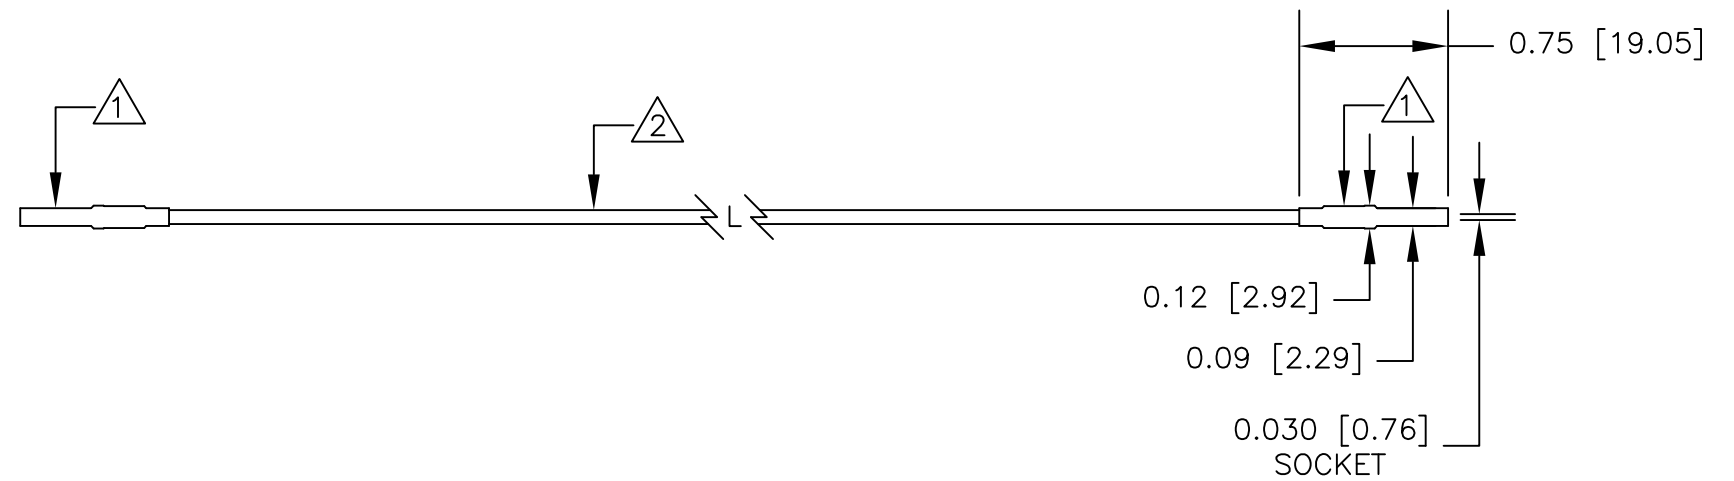

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 11/16	DESCRIPTION 0.030 [0.76] SOCKET JUMPER	
			APPROVED BY			
		FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON			B	08505	9860
APPLICATION		DO NOT SCALE DRAWING	SCALE	1:1	SHEET 1 OF 1	