


If this document is printed it becomes uncontrolled. Check for the latest revision

REVISIONS		
REV	DESCRIPTION	DATE
C	REVISED PER DCR NO. R060217	03/30/2006

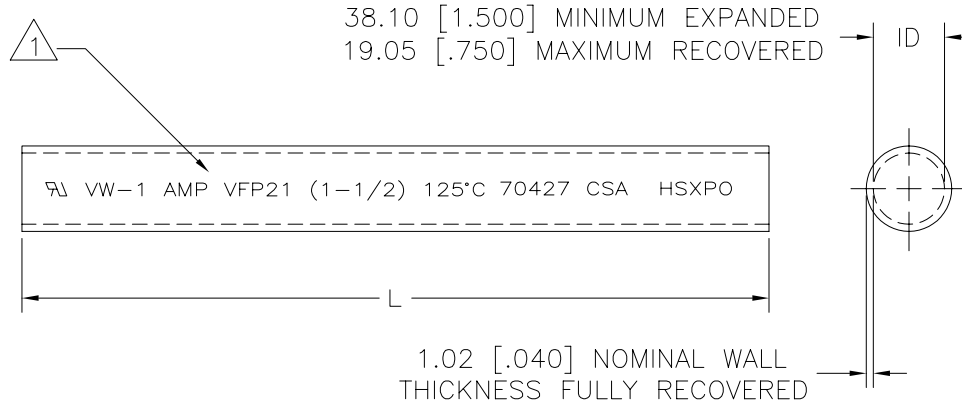

1 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED

- TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.
- TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.
- WEIGHT PER LINEAR FOOT/304.8 mm: 22.2 g/.049 lbs.
- MATERIAL: BLACK POLYOLEFIN

30.5 m [100 ft] MINIMUM	603331-2
1.22 m [4 ft] MINIMUM	603331-1
LENGTH L	PART NO.

### SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.	DRAWN	UNGUYEN	03/30/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA, USA 94025 
	APPROVED	JKUSTER	03/30/2006	
DECIMALS	CAD NAME			TITLE
.XX ± .01 [0004 in ]	R060217			AMPSULATION VFP21 1-1/2 INCH ID, BLACK
.X ± .1 [004 in ]	THIRD ANGLE PROJECTION			SIZE
ANGLES				CODE IDENT. NO.
.X ± 0.5 DEG				DWG. NO.
				B 06090
				603331
				DO NOT SCALE THIS DRAWING
				SHEET 1 OF 1