


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
  - 1.1 FREQUENCY RANGE: DC to 4.0 GHz.
  - 1.2 MAX. INPUT POWER:
    - 2 WATTS AVERAGE AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
  - 1.3 OPERATING TEMP. RANGE: -54°C to +125°C.
  - 1.4 IMPEDANCE: 50 OHMS.
  - 1.5 VSWR (MAX.): 1.20:1
  - 1.6 PEAK POWER:
    - 0.25 KILOWATT (5 MICROSECOND PULSE WIDTH).
- 2.0 MARKING
  - 2.1 MARK UNIT AS SHOWN: (REF: INK-02638-27-02)
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

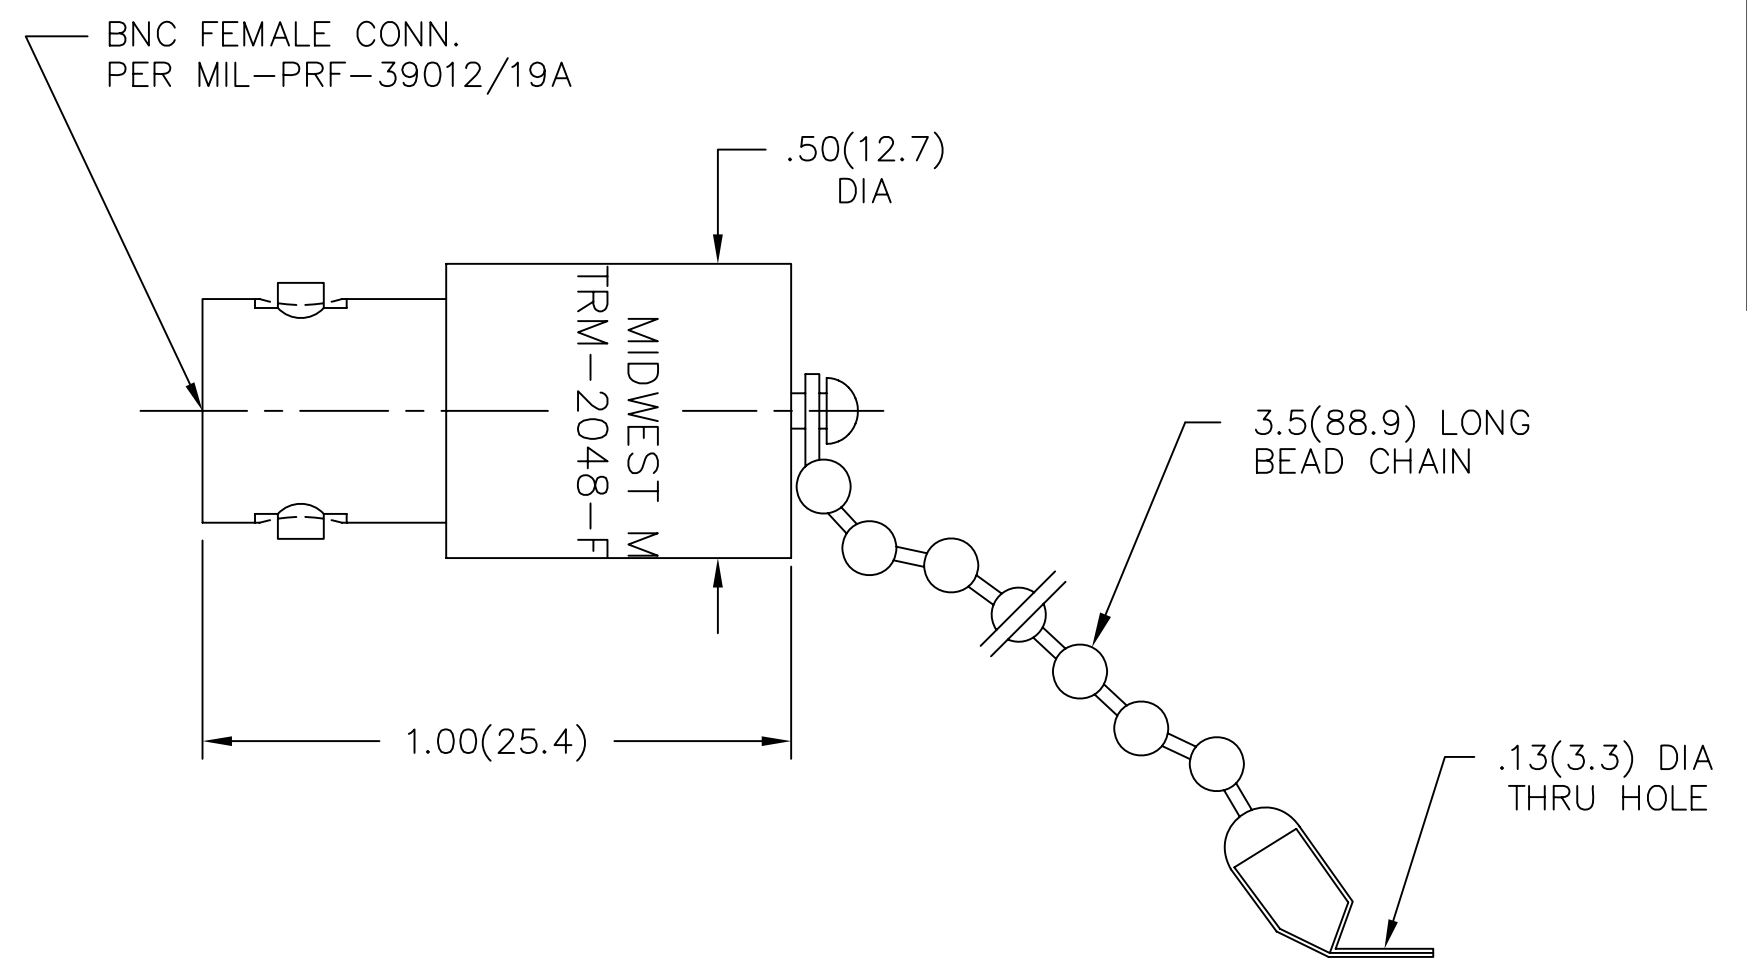

DWG. NO. WAS:  
TRM-2048-FC-000-02

REV.	DESCRIPTION	DATE
-	RELEASED	2/20/93
-1	UPDATE MODEL NO.	5/17/91
A	ECN 12414	2/9/93
B	ECN 16884	10/9/98
B1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION BNC FEMALE	
DRAWN/DATE M.HOLLMAN 2/9/93	ENG./DATE G.KOZAK 2/19/93	DRAWING NUMBER TRM-2048-FC-BNC-10	
CHECKED/DATE A.BEATTY 2/17/93	APPROVED/DATE	SCALE: 2=1	SHEET 1 of 1