


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 0148/0 & P/N: 0201  
 INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
 BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.  
 CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
2. P/N: W-701/COLOR  
 28AWG 19X40 TINNED COPPER  
 0.047 [1.19] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.
3. PERFORMANCE  
 MAXIMUM CURRENT: 1.0 AMPS  
 MAXIMUM VOLTAGE: 600 W.V.D.C.  
 MAXIMUM TEMPERATURE: 221°F (105°C)

		REVISIONS	
LTR	DESCRIPTION	DATE	APPROVED

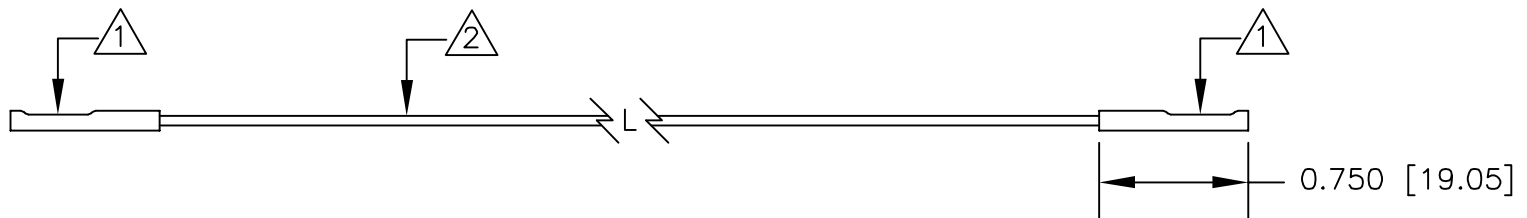

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
		MATERIAL SEE NOTE.	DRAWN	R.L.	DESCRIPTION			
			APPROVED BY			0.025 [0.64] SQ. SOCKET JUMPER		
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON					A	08505	9120
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1