

## 1700V/20A Silicon Carbide Power Schottky Barrier Diode

### Features

- Rated to 1700V at 20 Amps
- Zero reverse recovery current
- Zero forward recovery voltage
- Temperature independent switching behaviour
- High temperature operation
- High frequency operation


Key Characteristics		
$V_{RRM}$	1700	V
$I_F, T_c \leq 140^\circ\text{C}$	10*	A
$Q_c$	120*	nC

### Benefits

- Unipolar rectifier
- Substantially reduced switching losses
- No thermal run-away with parallel devices
- Reduced heat sink requirements

### Applications

- SMPS, e.g., CCM PFC;
- Motor drives, Solar application, UPS, Wind turbine, Rail traction, EV/HEV

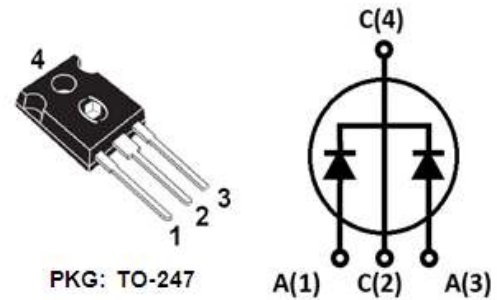

Part No.	Package Type	Marking
G3S17020B	TO-247AB	G3S17020B

\* Per leg ; \*\* per device

**Maximum Ratings**

Parameter	Symbol	Test Condition	Value	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$		1700	V
Surge Peak Reverse Voltage	$V_{RSM}$		1700	V
DC Blocking Voltage	$V_{DC}$		1700	V
Continuous Forward Current	$I_F$	$T_C=25^{\circ}C$ $T_C=75^{\circ}C$ $T_C=140^{\circ}C$	24* 19* 10*	A
Repetitive Peak Forward Surge Current	$I_{FRM}$	$T_C=25^{\circ}C$ , $t_p=10ms$ , Half Sine Wave, $D=0.3$	50*	A
Non-repetitive Peak Forward Surge Current	$I_{FSM}$	$T_C=25^{\circ}C$ , $t_p=10ms$ , Half Sine Wave	200*	A
Power Dissipation	$P_{TOT}$	$T_C=25^{\circ}C$	349*	W
		$T_C=110^{\circ}C$	151*	W
Operating Junction	$T_j$		-55°C to 175°C	°C
Storage Temperature	$T_{stg}$		-55°C to 175°C	°C
Mounting Torque		M3 Screw	1	Nm
		6-32 Screw	8.8	lbf-in



**Thermal Characteristics**

Parameter	Symbol	Test Condition	Value	Unit
			Typ.	
Thermal resistance from junction to case	$R_{th JC}$		0.43* 0.215**	°C/W


\* Per leg ; \*\* per device

**Electrical Characteristics**(Per leg)


Parameter	Symbol	Test Conditions	Numerical		Unit
			Typ.	Max.	
Forward Voltage	$V_F$	$I_F=10A, T_j=25^\circ C$	1.34	1.7	V
		$I_F=10A, T_j=175^\circ C$	2	2.5	
Reverse Current	$I_R$	$V_R=1700V, T_j=25^\circ C$	10	100	$\mu A$
		$V_R=1700V, T_j=175^\circ C$	20	200	
Total Capacitive Charge	$Q_C$	$V_R=1200V, T_j=150^\circ C$ $Q_C = \int_0^{V_R} C(V)dV$	120	-	nC
Total Capacitance	C	$V_R=0V, T_j=25^\circ C, f=1MHz$	1500	1600	pF
		$V_R=400V, T_j=25^\circ C, f=1MHz$	87	95	
		$V_R=800V, T_j=25^\circ C, f=1MHz$	63	70	

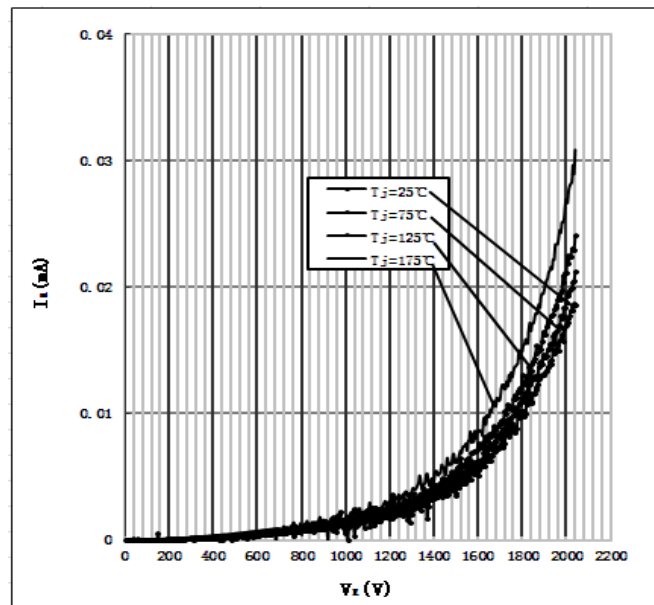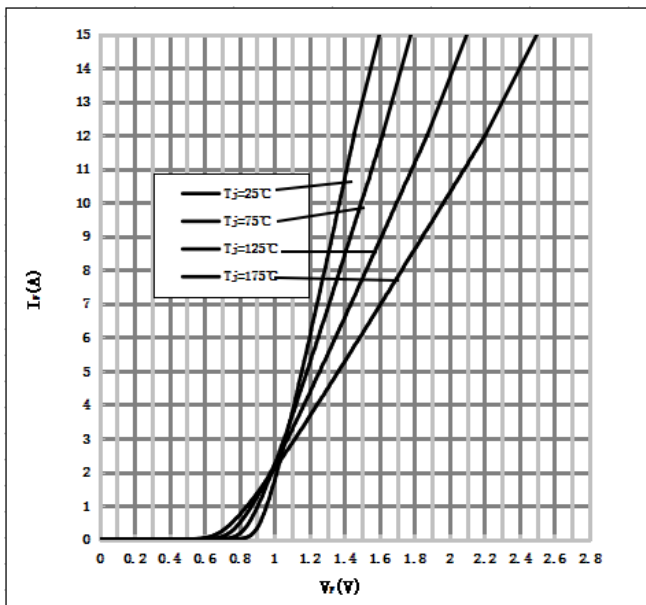**Performance Graphs**1) Forward IV characteristics as a function of  $T_j$  :2) Reverse IV characteristics as a function of  $T_j$  :


3) Current Derating

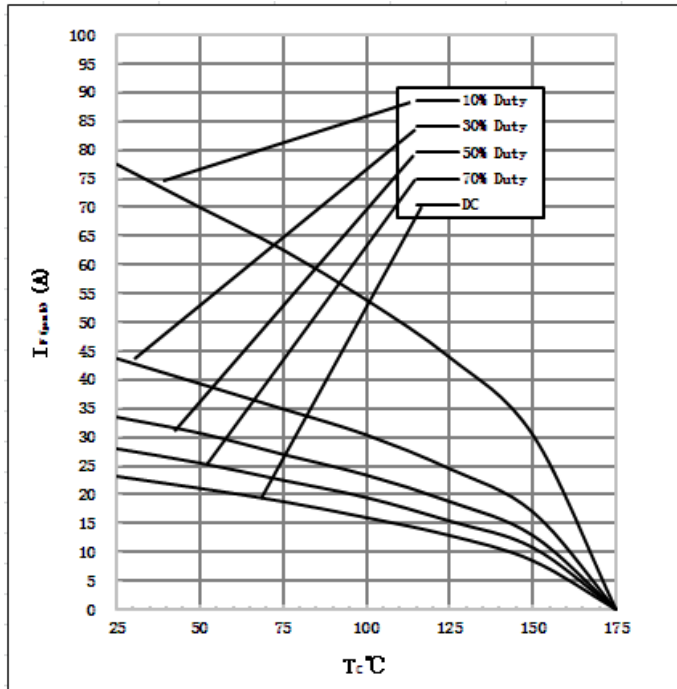

4) Capacitance vs. reverse voltage :

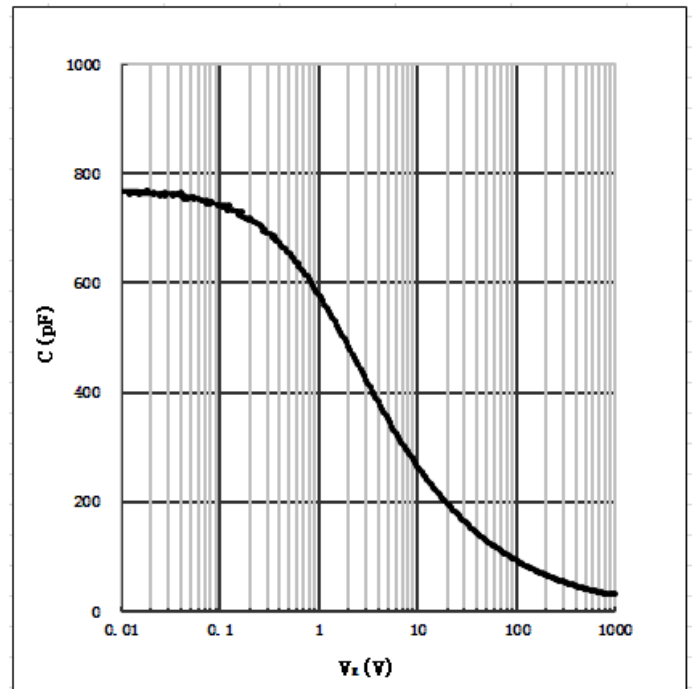

Package TO-247AB

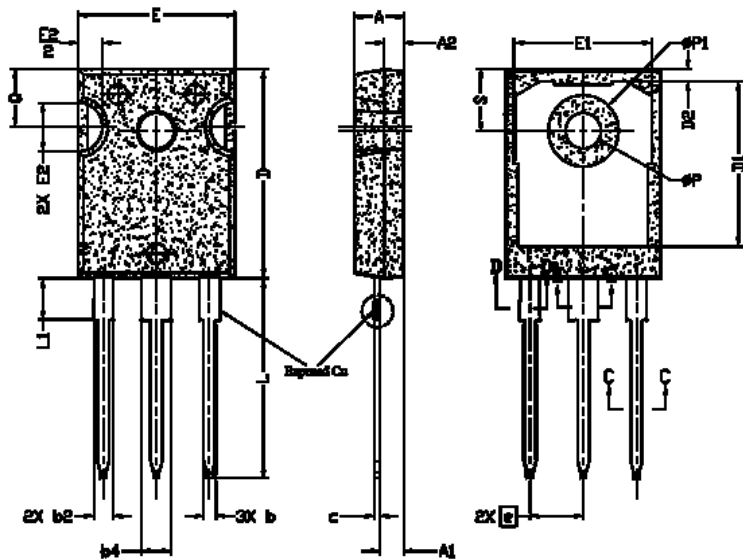

SYMBOL	DIMENSIONS			NOTES
	MIN	NOM	MAX	
A	4.83	5.02	5.21	
A1	2.29	2.41	2.55	
A2	1.50	2.00	2.49	
b	1.12	1.20	1.33	
b1	1.12	1.20	1.28	
b2	1.91	2.00	2.39	6
b3	1.91	2.00	2.34	
b4	2.87	3.00	3.22	6, 8
b5	2.87	3.00	3.18	
c	0.55	0.60	0.69	6
c1	0.55	6.00	0.65	
D	20.80	20.95	21.10	4
D1	16.25	16.55	17.65	5
D2	0.51	1.19	1.35	
E	15.75	15.94	16.13	4
E1	13.46	14.02	14.16	5
E2	4.32	4.91	5.49	3
e	5.44 BSC			
L	19.81	20.07	20.32	
L1	4.10	4.19	4.40	6
$\Phi P$	3.56	3.61	3.65	7
$\Phi P1$	7.19 REF			
Q	5.39	5.79	6.20	
S	6.04	6.17	6.30	

**Note:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC(RoHS2). RoHS Certification and other certifications can be obtained from GPT sales representatives or GPT website: <http://globalpowertech.cn/English/index.asp>

More product datasheets and company information can be found in:

<http://globalpowertech.cn/English/index.asp>

