

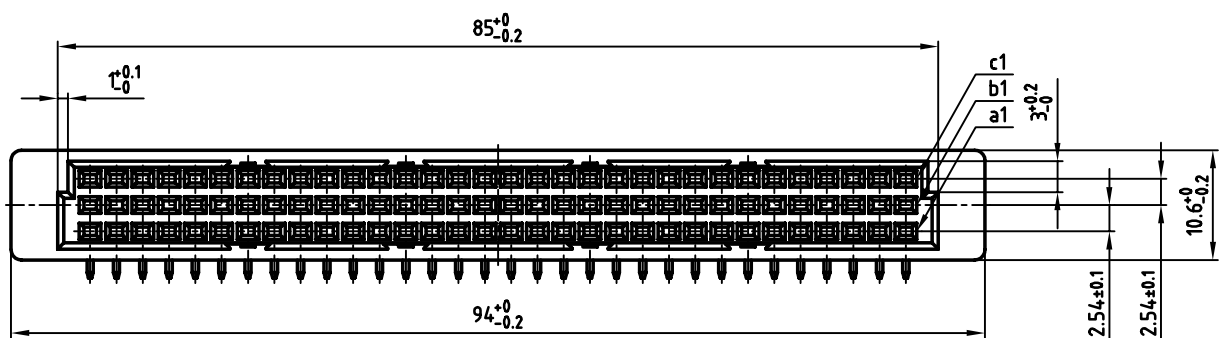



used for: DIN EN 60603 TYPE "R"

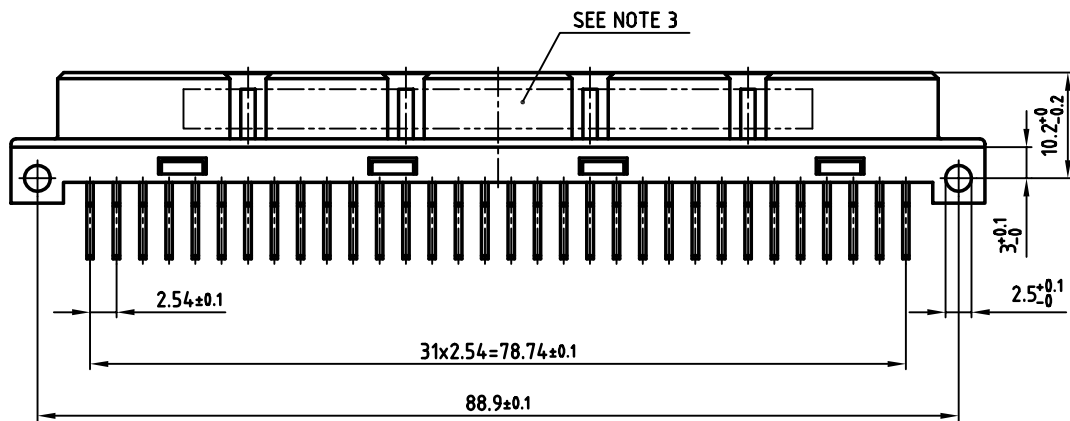

P.C.B. HOLE-DRILLINGS

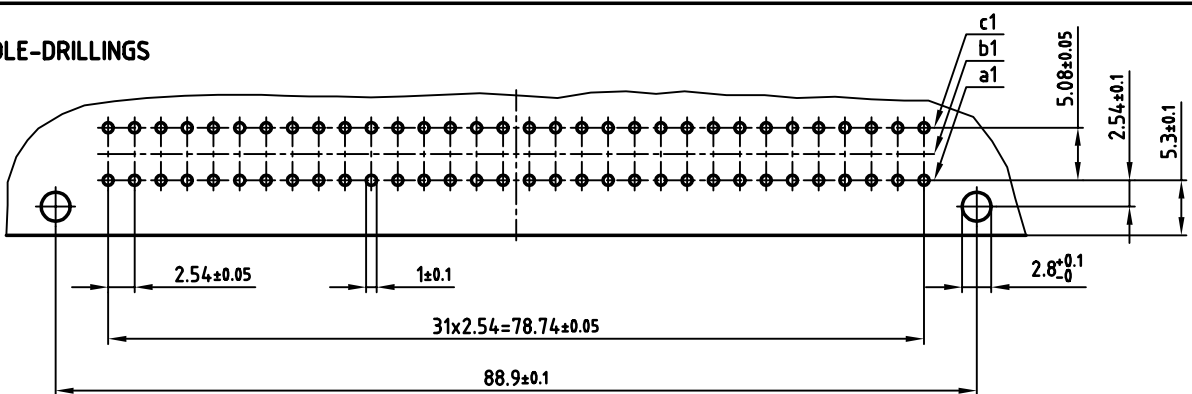

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
3. CONNECTOR IS PART MARKED: 122A10849X CONEC Y/WW

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	
scale:	2:1
material:	SEE NOTES
title:	FEMALE CONNECTOR TYPE "R" 64pos. ANGLED
dwg no:	AutoCAD 2000 12K1A209
part no:	122A10849X

2002	date	name
drawn	01.07.	Parei
appd.	01.07.	E. Mickenbecker
norm	DIN EN 60603	
d-old		
CONEC		
DIN-A	3	sh:1/1