
## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	REL. NRN 34431	11/29/07	STW
Α	DCN 37782	09/10	PJS

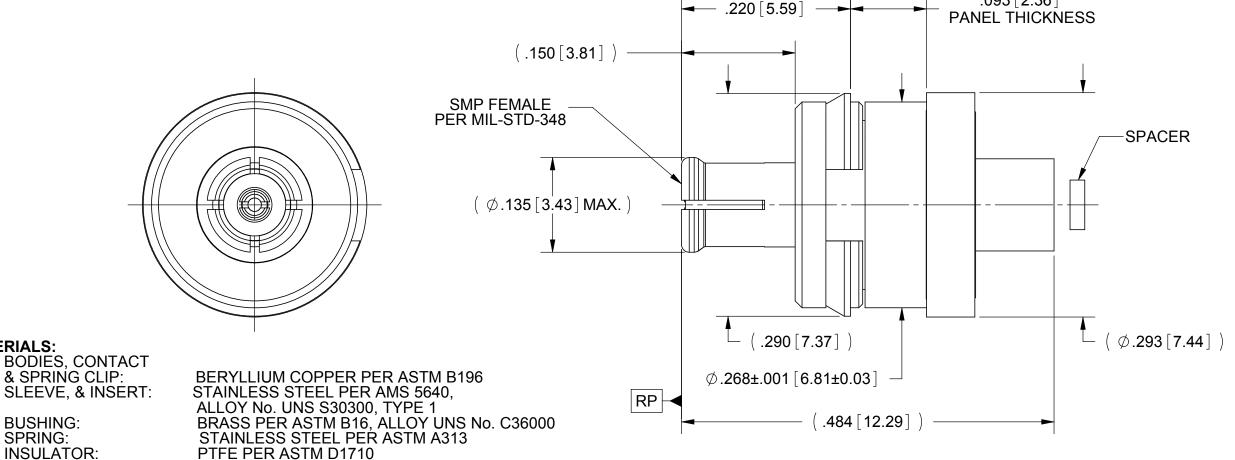

**FINISHES:** 

**MATERIALS:** 

**BODIES, CONTACT** 

DIELECTRIC SPACER:

**BUSHING:** 

**INSULATOR:** 

SPRING:

& SPRING CLIP: GOLD PER ASTM B488, TYPE II GRADE C, CLASS 1.27, OVER NICKEL

PER AMS-QQ-N-290, CLASS 1

**BUSHING:** NICKEL PER AMS-QQ-N-290, CLASS 2

**TORLON 4203** 

SLEEVE, **INSERT & SPRING:** PASSIVATED PER AMS 2700

**ELECTRICAL**:

**IMPEDANCE:** 50 OHMS

FREQ. RANGE: DC TO 18.0 GHZ **VSWR**: 1.20 MAX. 0.25 dB MAX. **INSERTION LOSS: 500 VRMS** D.W.V.:

**INSULATION RES.:** 5,000 MEGOHMS MINIMUM

FLOAT:

AXIAL FLOAT: .040 INCH RADIAL FLOAT: .020 INCH

**SPRING FORCE:** 

SPRING RATE: 39 LBS/INCH NOM. PRE-LOAD: 0.81 LBS NOM.

.035" COMPRESSION: 2.15 LBS NOM. .125" COMPRESSION: 5.6 LBS NOM.

MATERIAL: SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A **PROPRIETARY** THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

.093 [2.36]

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

## UNLESS OTHERWISE SPECIFIED

RECOMMENDED MOUNTING HOLE

.093±.002[2.36±0.05]

Ø.272±.001[6.91±0.03]

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
) REMOVE ALL BURRS

DRAWN: JMC 12/03/07 CHECKED: STW 12/04/07 **APPROVED** STW 12/04/07

## SV Microwave, Inc.

 $\emptyset.283\pm.002[7.19\pm0.05]$ 

30°

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMP FEMALE. FLOAT MOUNT T-FLEX 405. .093" PANEL THK.

1204-6000 B 95077 SCALE: 8:1 SHEET 1 OF 1