

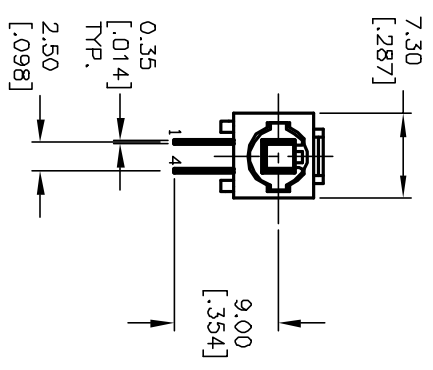
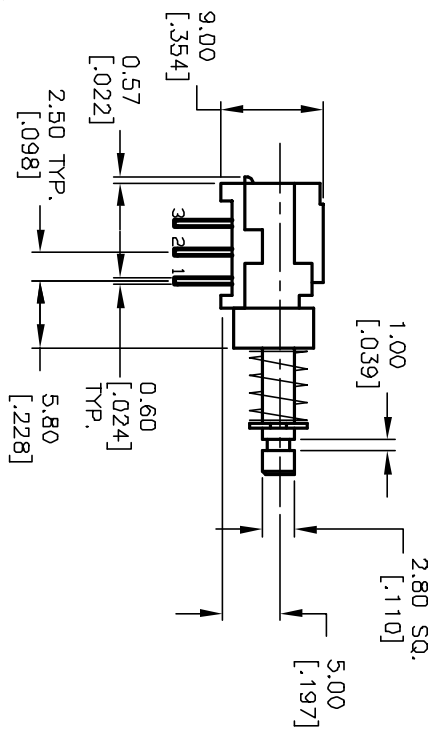


RECOMMENDED PCB LAYOUT

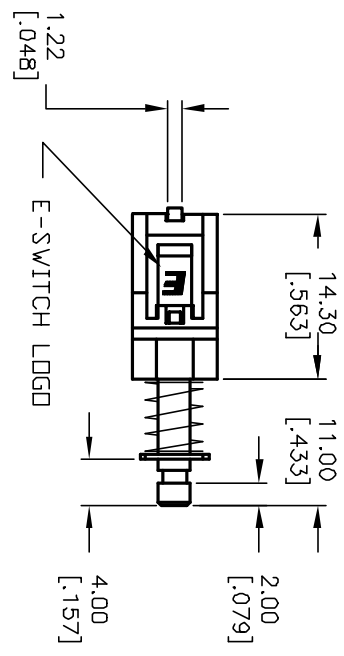

CIRCUIT: 2PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.1A @30V DC
5. MATERIALS:
CONTACT/TERMINAL: SILVER PLATED COPPER ALLOY
HOUSING/PLUNGER: UL94HB
6. CONTACT RESISTANCE: 0.1 MAX.
7. TIMING: NON-SHORTING (BBM)
8. OPERATING FORCE: 170±100g
9. TRAVEL: 2mm (TRAVEL TO LOCK)
3mm (OVERALL)
10. ELECTRICAL LIFE: >10,000
11. DIELECTRIC STRENGTH: 250V RMS

E-SWITCH®

MTH2U EE N AGX (LATCHING)

| | | | | |
|------|---------|---------------------|---------|------|
| REV. | ECN No. | DESCRIPTION | DATE | CHKD |
| C | 11999 | REVISED AND REDRAWN | 3/14/02 | CJB |

| | | | | | |
|---------------------------|-------|---------|-----|---------|-----|
| TITLE | SCALE | DATE | DR | DWG | REV |
| MTH2U EE N AGX (LATCHING) | 1.5:1 | 3/14/02 | CJB | A960002 | C |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED