



Electrical specifications

Center Frequency: 4900 MHz
Passband: 4800-5000 MHz
Input / Output Impedance: 50 Ohms
Insertion loss @ center: <1.25 dB
Insertion loss @ band edges: <1.5 dB
Return Loss: >14 dB @ Passband
Rejection: >=40 dB @ <4725 MHz
Rejection 2: >40 dB @ 5075 MHz


Mechanical

Connector Type: N-Type (M) / N-Type (F)
Dimensions: 5.75 x 4.5 x 1.05 inches

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

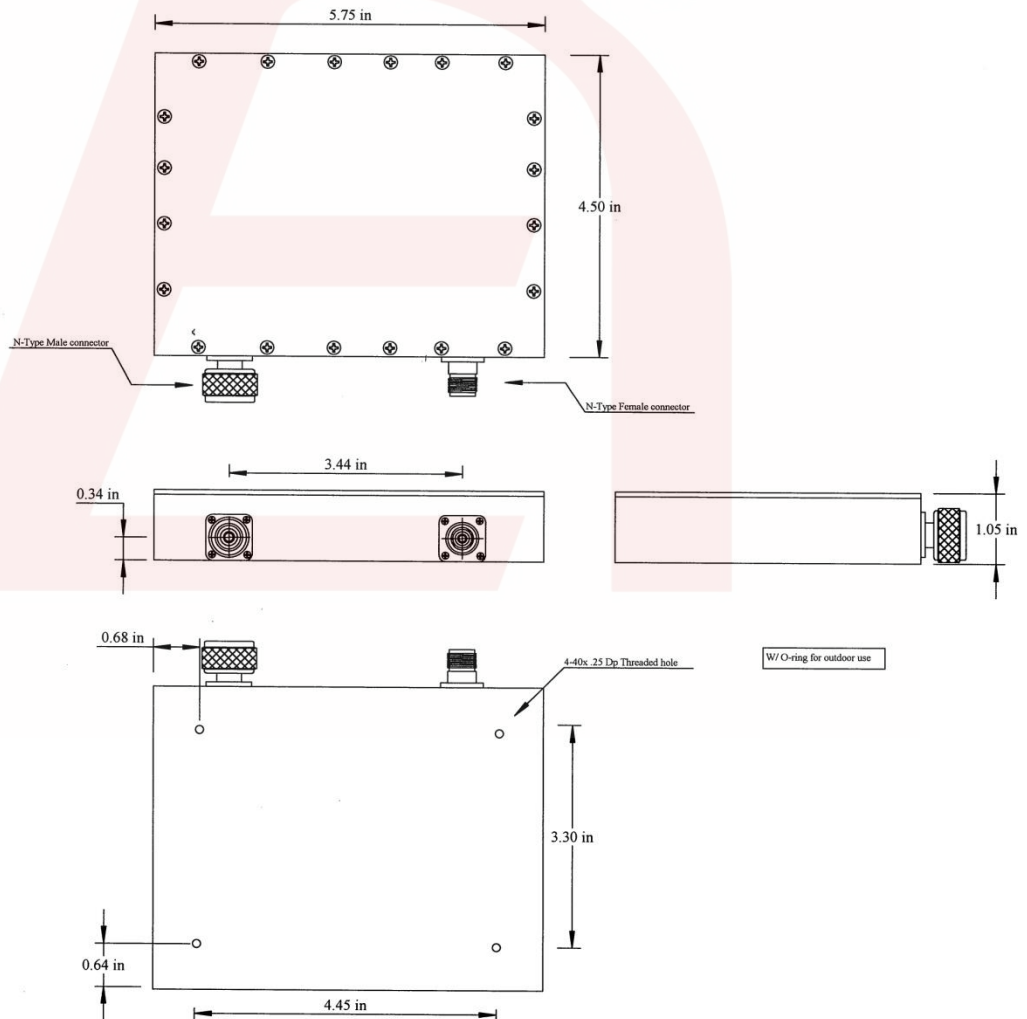

DS-B10922-02092015-Rev0