


| | | | | | | | |
|---|-----------------------|---------------------------|-----|------|----------|------|------|
| ○ | SPECIFICATIONS 仕様図 | SURFACE TREATMENT 表面処理 | SYM | DATE | REVISION | REVR | APPR |
| | REFERENCE 参考図 | HEAT TREATMENT 熱処理 | 1* | | | | |
| | | FINISH 仕上げ | 2* | | | | |
| | | | 3* | | | | |

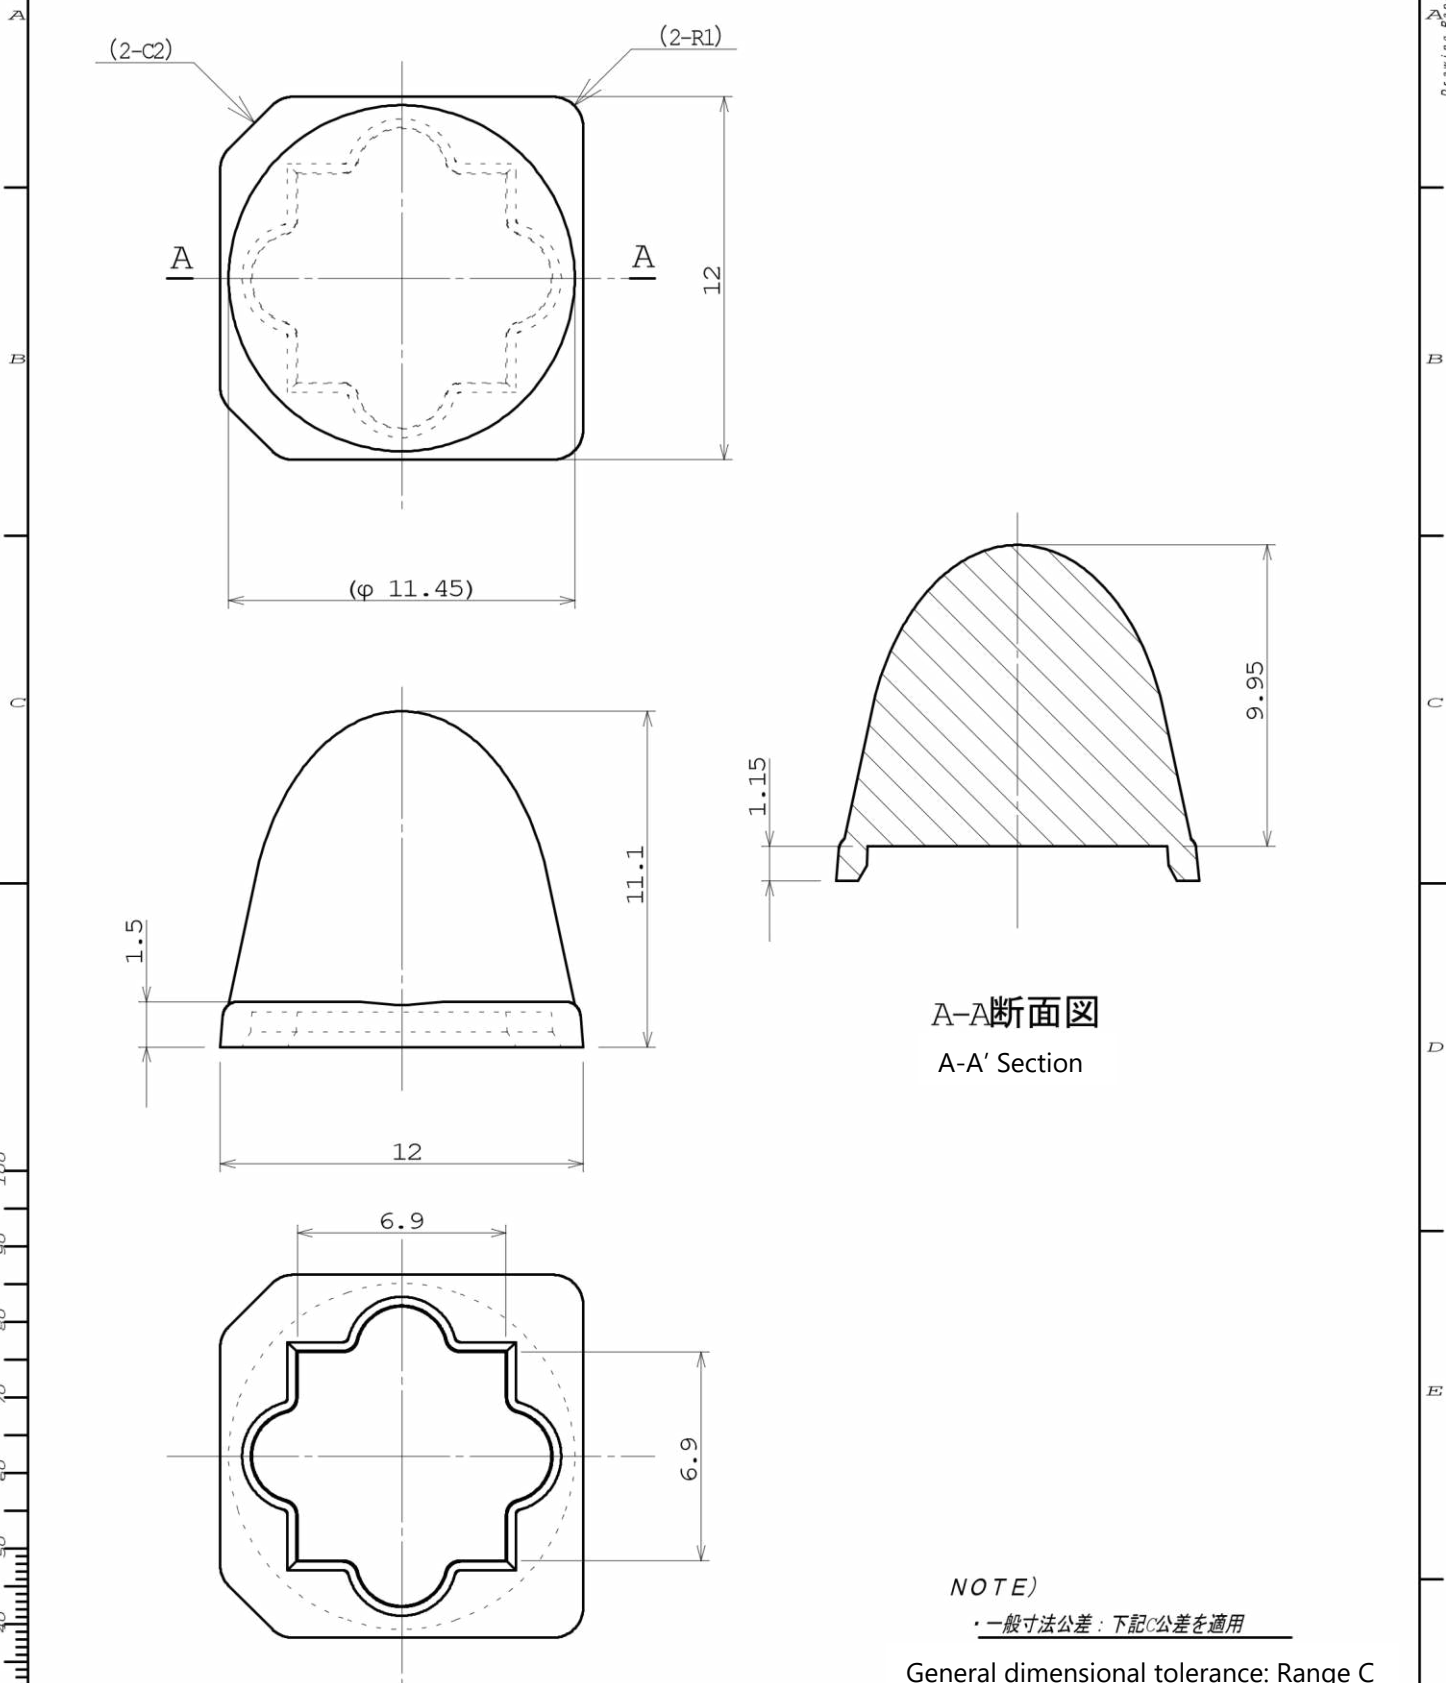

A-A断面図
A-A' Section

NOTE)
・一般寸法公差：下記C公差を適用

General dimensional tolerance: Range C

| | | | | | | | | |
|----------------------------|---------------|-----------|--------------------------------|--|--------------------------|--------------|---------|------------|
| TOLERANCE UNLESS SPECIFIED | | | ORIGINAL DATE 2021/7/7 | MATERIAL (COMPOUND) Silicone rubber | TITLE DK-8M-033 製品図 | | | |
| RANGE | A | F | SCALE 4:1 | COLOR Clear | DRAWING NO. 21070703E | | | |
| LESS THAN 6 | ± 0.2 | ± 0.1 | UNIT mm | HARDNESS A80 | DESIGN | DRAWN | CHECKED | APPROVED |
| OVER 6 TO 20 | ± 0.3 | ± 0.2 | SIZE A4 | | T.Motoyanagi | T.Motoyanagi | S.Endo | E.Ishiguro |
| OVER 20 TO 50 | ± 0.5 | ± 0.3 | 3RD ANGLE SYSTEM | | | | | |
| OVER 50 TO 100 | ± 1.0 | ± 0.5 | | | | | | |
| OVER 100 TO 300 | ± 2.0 | ± 1.0 | | | | | | |
| OVER 300 TO 500 | ± 5.0 | ± 2.5 | | | | | | |
| ANGLE | $\pm 2^\circ$ | | ASAHI RUBBER INC. 株式会社朝日ラバー | | | | | |

◆ASA COLOR LENS

Part number : DK-8M-033 / DK-30M-033K3

Initial Properties

1. Physical Properties

| Items | Materials : ASR-A80MC |
|--|-----------------------|
| Color | Transparent |
| Hardness JIS Type A | A80/S±5 |
| Total light transmittance(t=2mm) | 90% and more |
| Refractive index (25°C) (D-line 589 nm) | 1.41±0.03 |

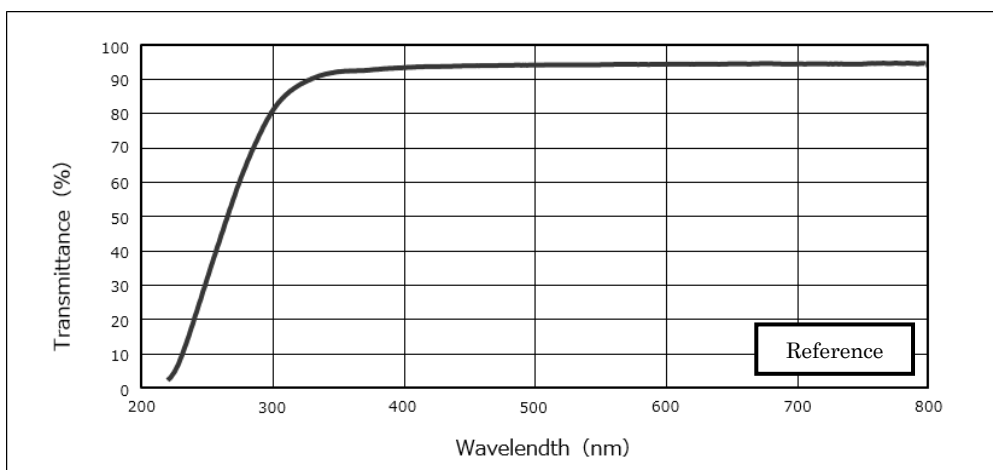


Figure1. Total light transmittance of ASR-A80MC (t=2mm)

2. Light Distribution Data

