

## 1. Features

- Antenna for 4G LTE applications including MIMO systems.
- LTE 700, GSM850, GSM900, DCS1800, PCS1900, WCDMA2100, LTE B7 (2500-2690 MHz), LTE B40 (2300 – 2400 MHz)
- 1.13mm diameter RF cable with I-PEX MHF connector
- Self-adhesive mounted
- Quick and simple integration minimizes design cycle
- Available in two standard cable lengths, 100mm and 150mm. Other lengths are available.

## 2. Description

Moseni is intended for use with 4G LTE applications. This product specification shows the performance of this antenna in all workable bands. Moseni offers easy integration with plug and play simplicity.


## 3. Applications

- Smart meters
- Network devices
- Femto / Pico base stations
- Telematics
- Remote monitoring
- Machine to Machine
- POS (Point of Sale) terminals



## 4. Part Number

**Moseni: SRFL029**

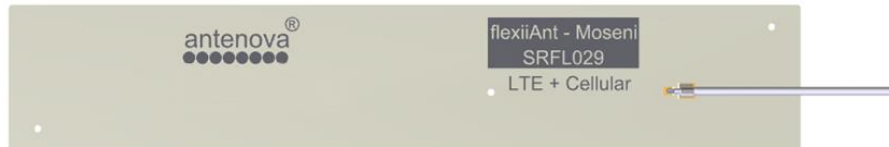

## 5. General Data

|                              |  |
|------------------------------|--|
| Product name                 | Moseni   |
| Part Number                  | SRFL029  |
| Frequency                    | 698-798MHz<br>824-960MHz<br>1710-2170MHz<br>2300-2400MHz<br>2500-2690MHz |
| Polarization                 | Linear   |
| Operating temperature        | -40°C to +85°C   |
| Environmental condition test | ISO 16750-4 5.1.1 / 5.1.2  |
| Impedance with matching      | 50 Ω   |
| Weight                       | < 0.5 g  |
| Antenna type                 | FPC Self-adhesive 3M 468P  |
| Dimensions (Antenna)         | 110.0 x 20.0 x 0.15 (mm)   |
| Connection                   | I-PEX MHF1 (20278-112R-13)   |

## 6. RF Characteristics

|                     | 698 – 798 MHz | 824 – 960 MHz | 1710 - 2170 MHz |
|---------------------|---------------|---------------|-----------------|
| Peak gain           | 3.50dBi       | 3.50dBi       | 3.80dBi         |
| Average gain        | -1.60dBi      | -1.70dBi      | -1.40dBi        |
| Average efficiency  | >60%          | >60%          | >65%            |
| Maximum return loss | -5.0dB        | -8.0dB        | -5.5dB          |
| Maximum VSWR        | 3.50:1        | 2.40:1        | 3.30:1          |


|                     | 2300 – 2400 MHz | 2500 – 2690 MHz |
|---------------------|-----------------|-----------------|
| Peak gain           | 4.50dBi         | 4.60dBi         |
| Average gain        | -0.70dBi        | -0.50dBi        |
| Average efficiency  | >80%            | >80%            |
| Maximum return loss | -12dB           | -16dB           |
| Maximum VSWR        | 1.40:1          | 1.70:1          |

*All data measured in a loaded condition adhered to a 1.6mm thick plastic carrier free space.*


*An RF choke was used to prevent cable radiation.*

## 7. RF Performance

### 7.1 Return Loss

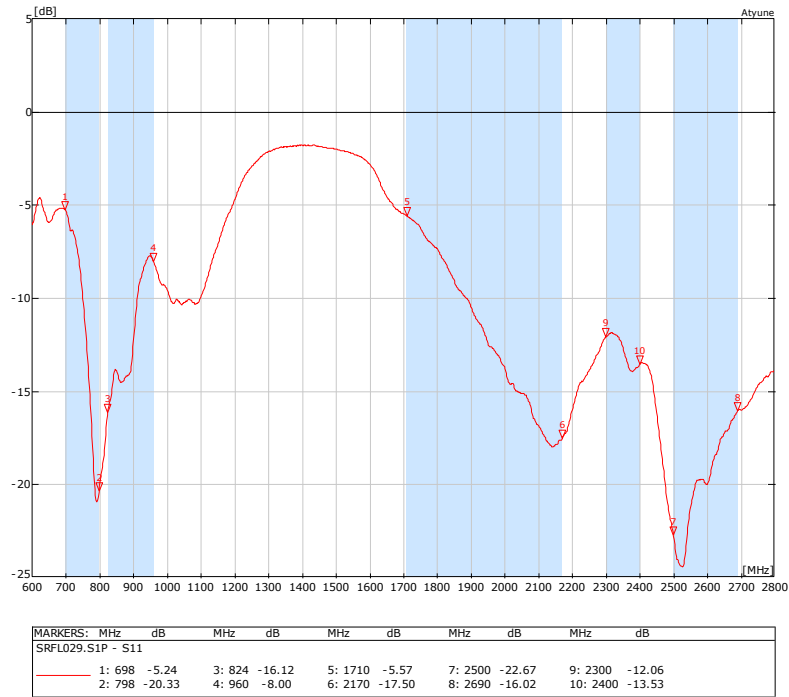


### 7.2 VSWR

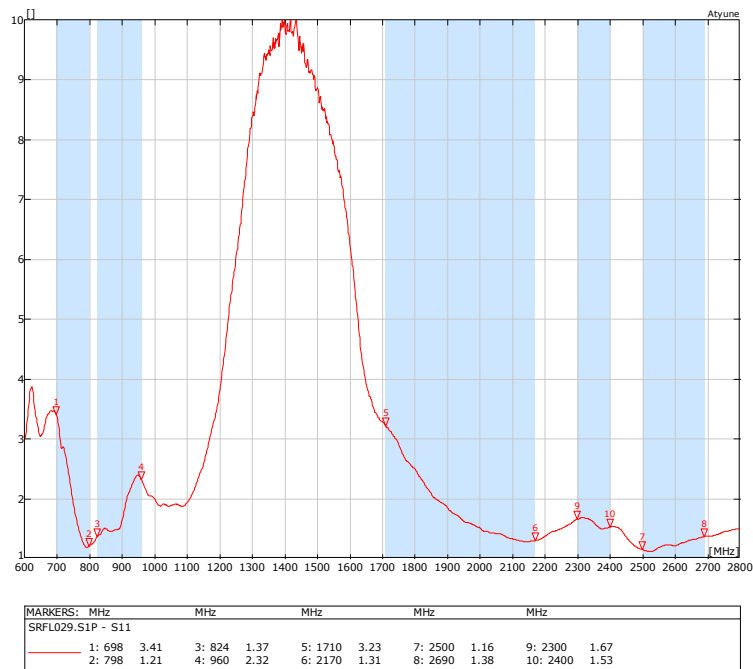


## 7.3 Antenna patterns


### 7.3.1 698 MHz – 798 MHz

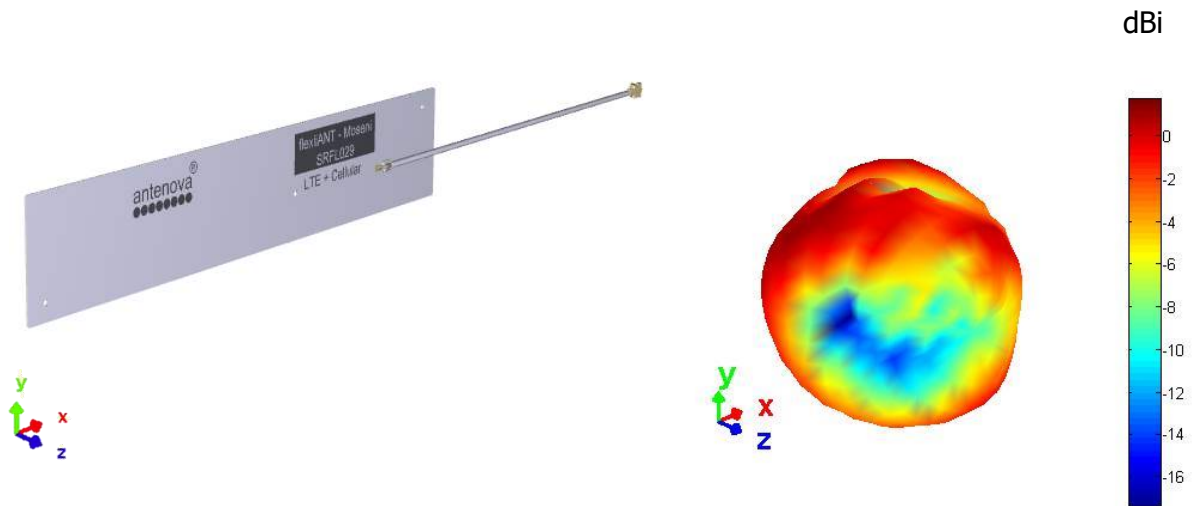


**3D pattern at 745 MHz**  
*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

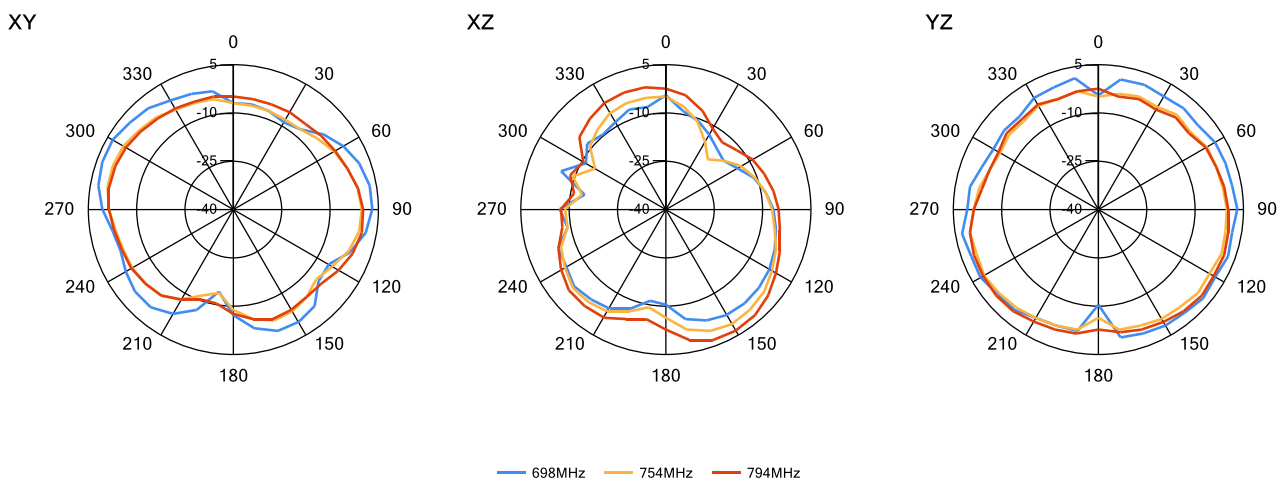


### 7.3.2 824 MHz – 960 MHz

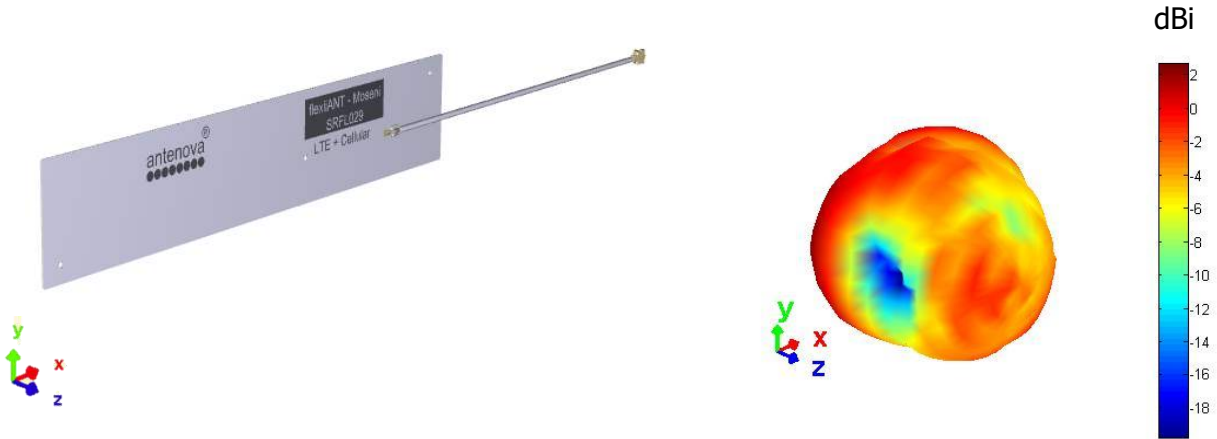


**3D pattern at 890 MHz**  
*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

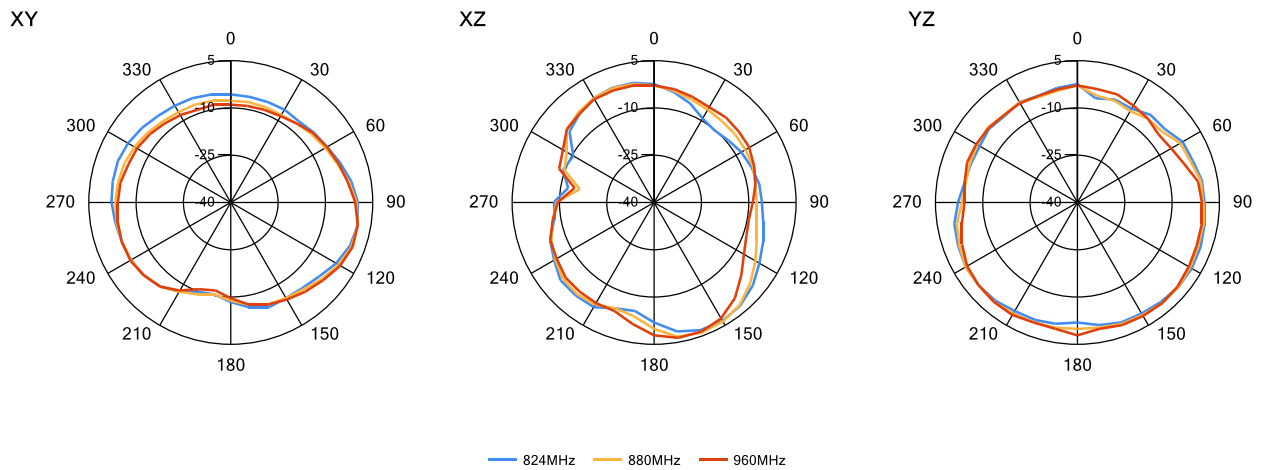


### 7.3.3 1710 MHz – 2170 MHz

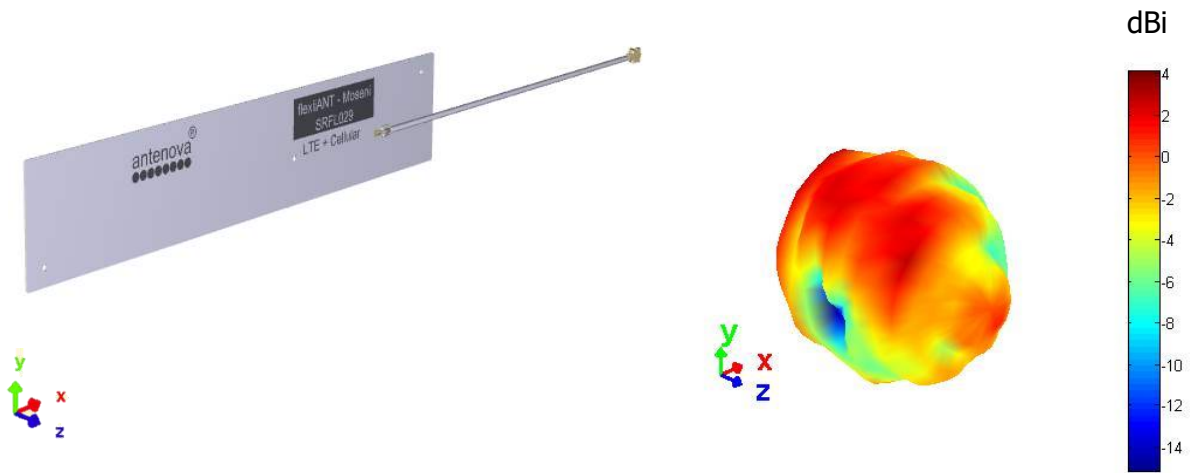


**3D pattern at 1990 MHz**  
*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

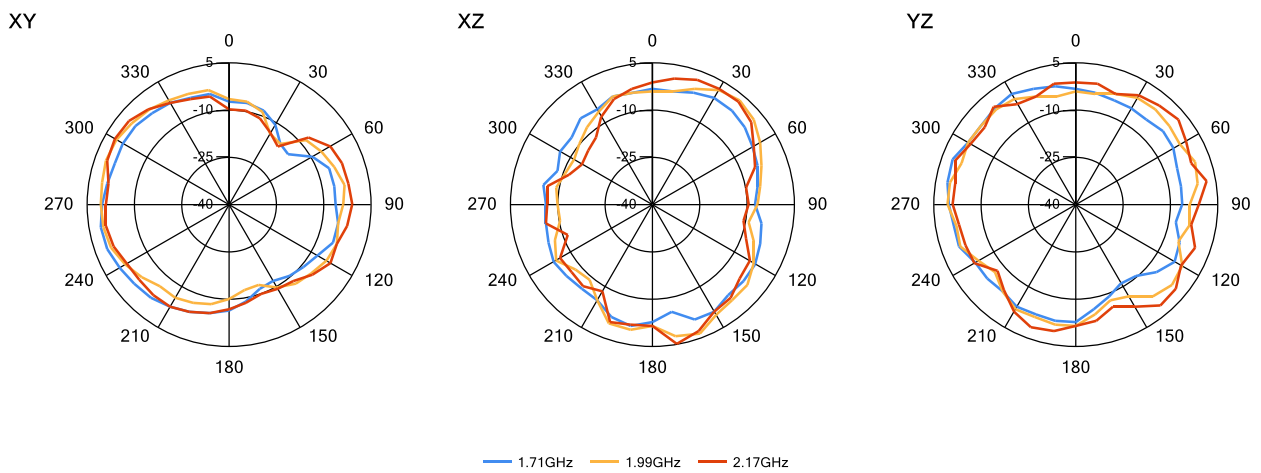

### 7.3.4 2300 MHz – 2400 MHz

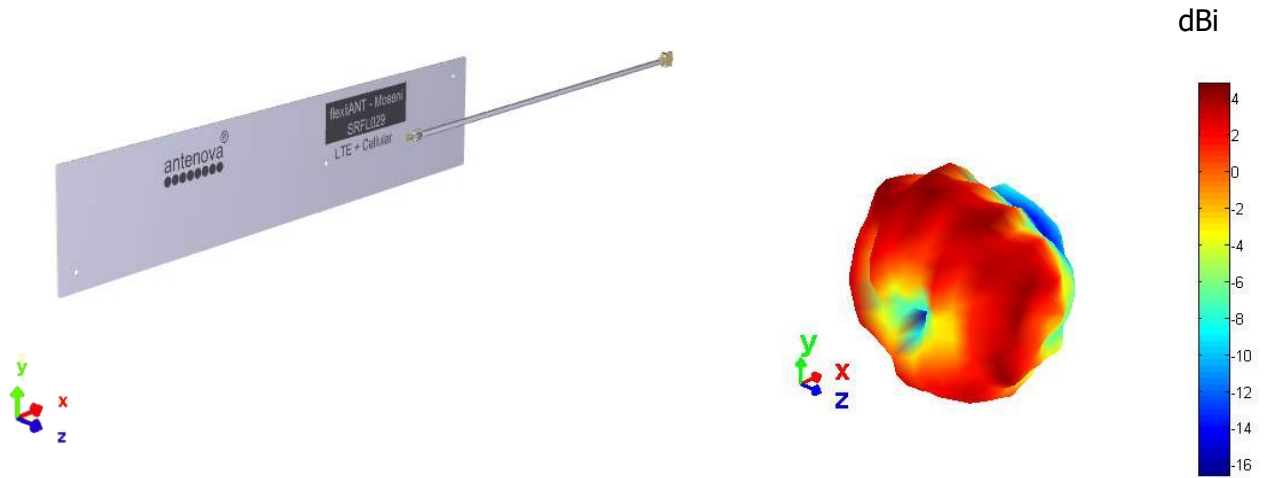


**3D pattern at 2350 MHz**  
*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

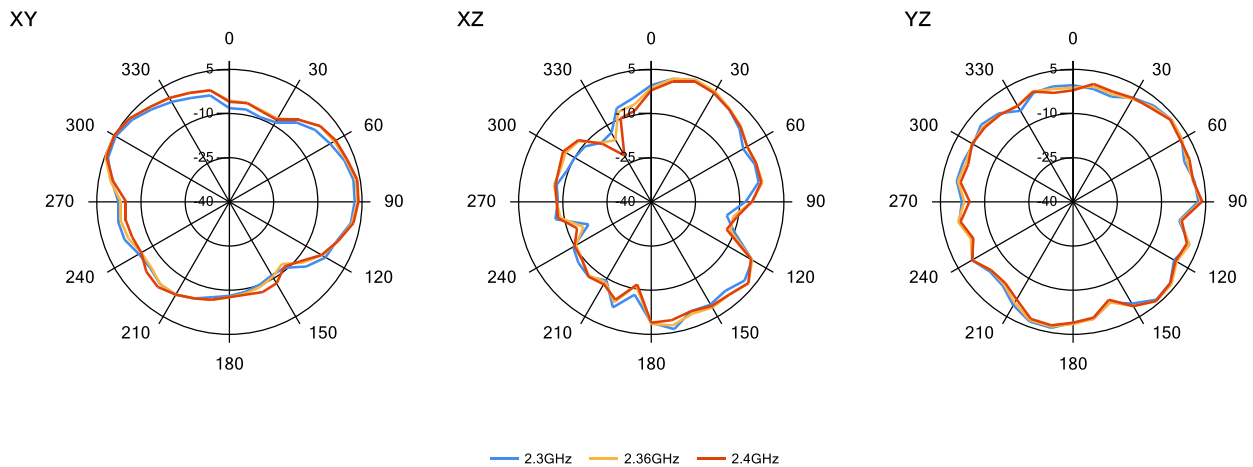




### 7.3.5 2500 MHz – 2690 MHz

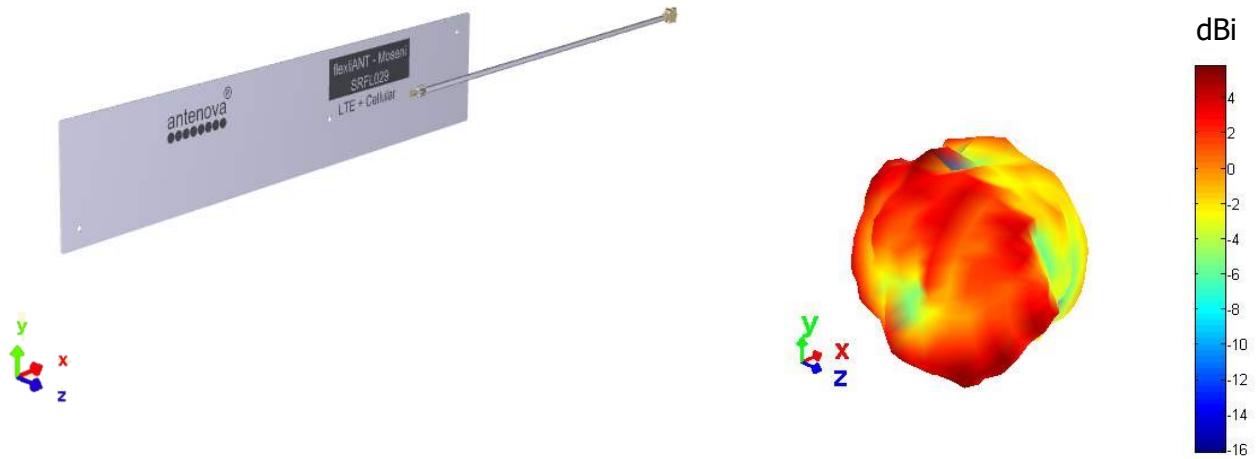


**3D pattern at 2600 MHz**  
*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

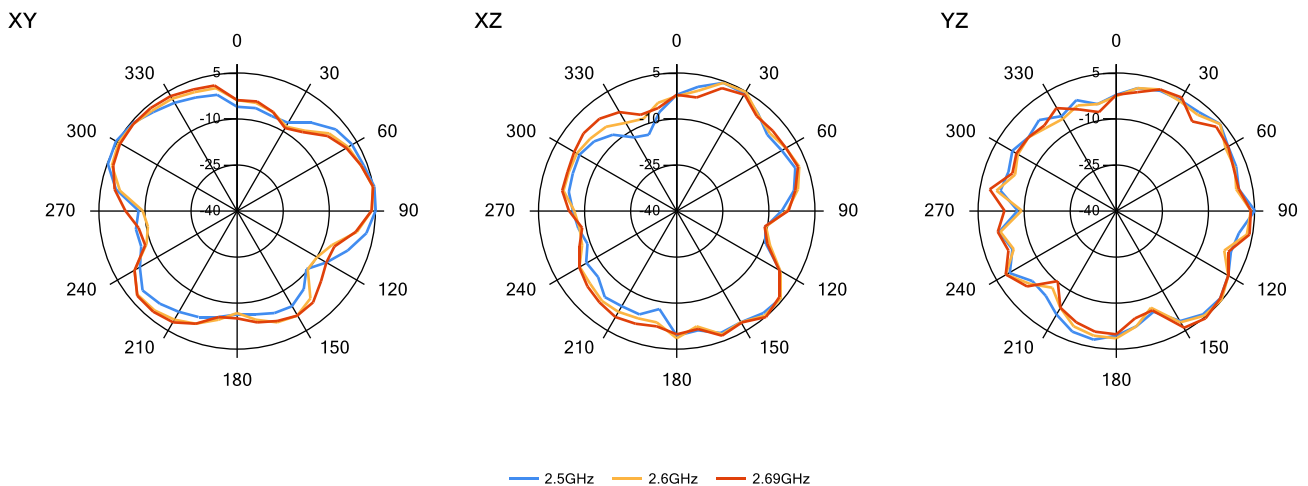

## 8. Antenna Dimensions


### 8.1 Dimensions FPC section

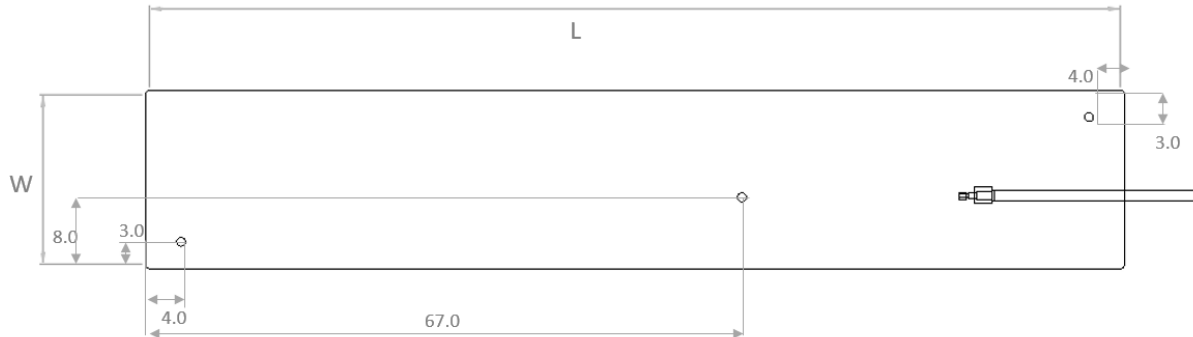

| L               | W              | T                 |
|-----------------|----------------|-------------------|
| Length          | Width          | Thickness         |
| 110.0 ±0.2 (mm) | 20.0 ±0.2 (mm) | 0.15 (mm) nominal |

All dimensions in mm

### 8.2 Dimensions assembled

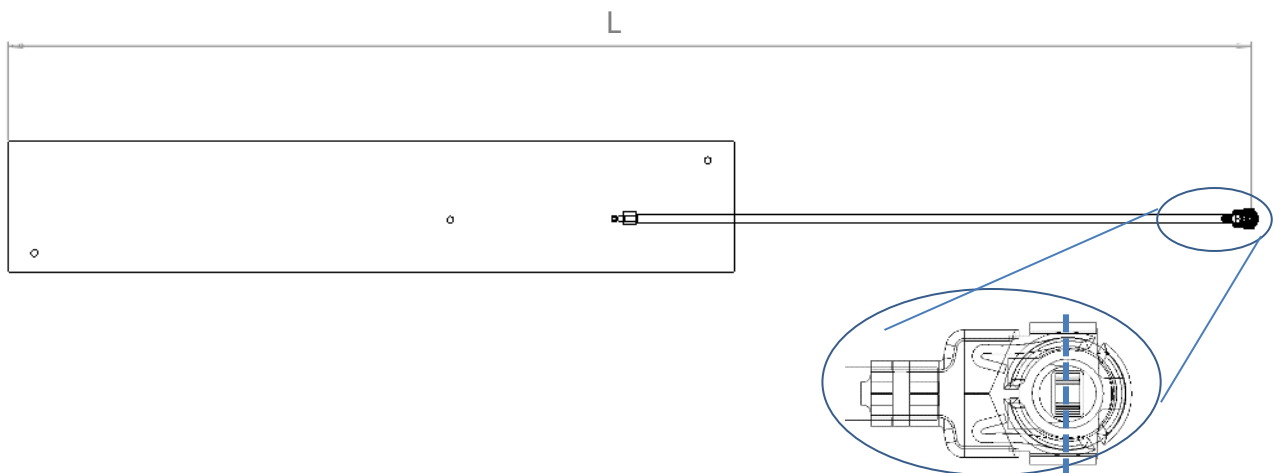



| SRFL029-100   | SRFL029-150   |
|---------------|---------------|
| L             | L             |
| 189 ±2.0 (mm) | 239 ±2.0 (mm) |

Standard cable length for this antenna (other lengths are available, MOQs apply)

Antennas for Wireless Applications


### 8.3 I-PEX Connector MHF1 (20278-1121R-13)

| I-PEX    |              |
|----------|--------------|
| Material | Copper Alloy |
| Plating  | Ag           |

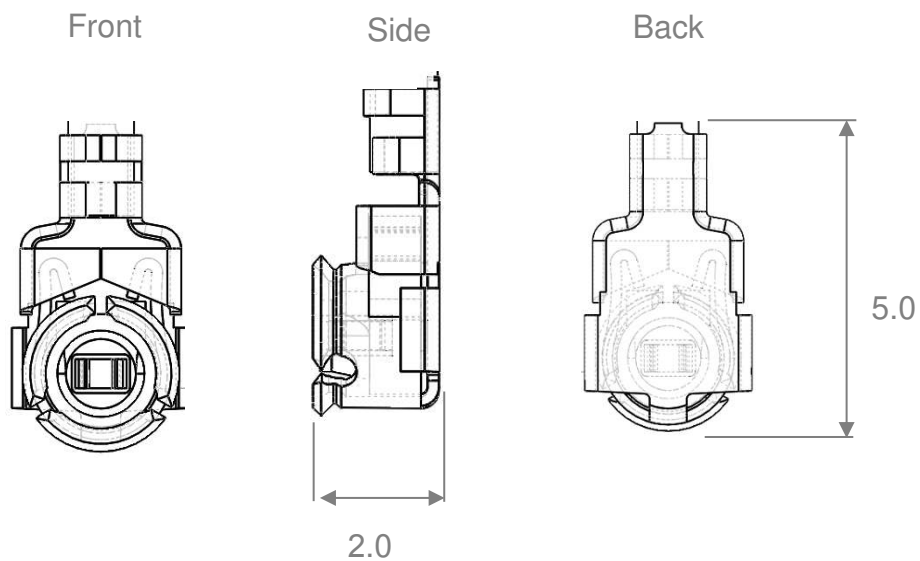

All dimensions in mm

### 8.4 Assembly

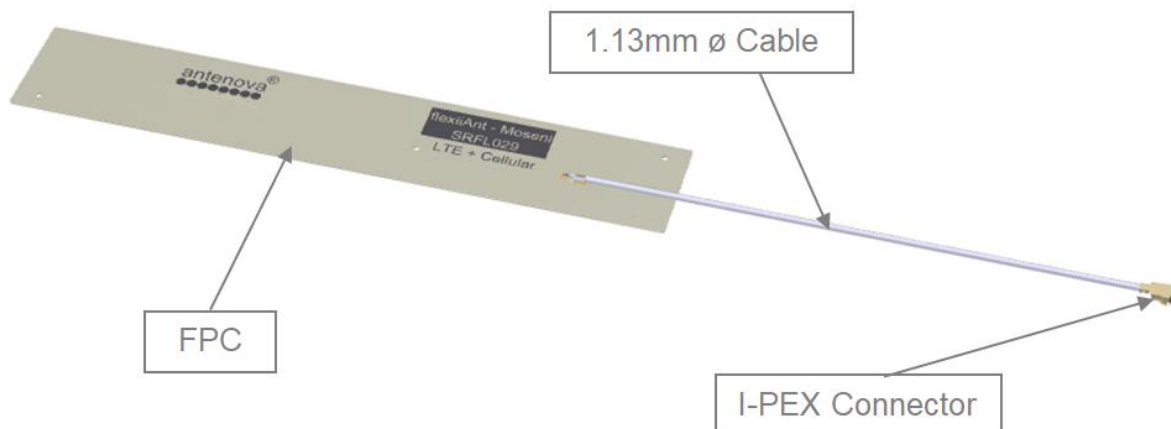

Antennas for Wireless Applications

## 9. Electrical Interface

### 9.1 Host Interface

The host PCB requires the mating connector which is the I-PEX MHF (UFL) receptacle. The location should be close to the chip/modules pin for the RF. Any feed from this receptacle should be maintained at 50Ω impedance.

### 9.2 Transmission Line

All transmission lines should be designed to have a characteristic impedance of 50Ω.


- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen, (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the feed.

A DC blocking capacitor should be placed in line to protect the RF front end.

## 10. Mechanical Fixing

The antenna uses 3M 468MP adhesive on the reverse side of the FPC. The antenna has an easy access split line to peel off to reveal the adhesive side. It is designed for a one time fix to a clean smooth surface.

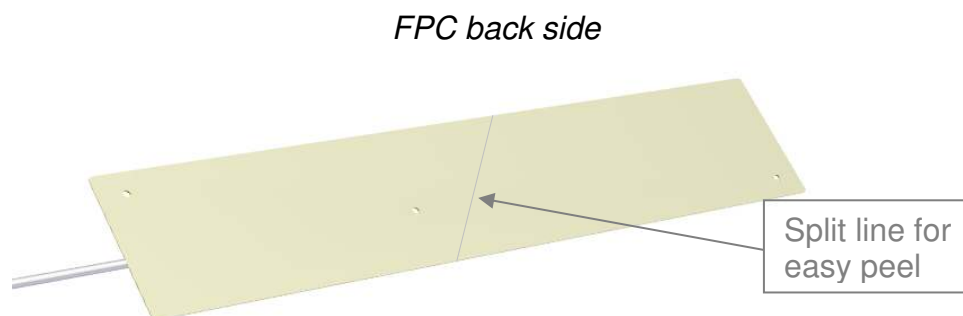


## 10.0 Antenna Integration Guide

### 10.1 Placement

For placing the FPC antenna within a device, the host PCB size is not a factor like with PCB mounted antennas. However the placement still needs to follow some basic rules, as any antenna is sensitive to its environment.

Use six spatial directions, as shown below as a guide. The antenna FPC section should ideally maintain a minimum of three directions free from obstructions to be able to operate effectively. The other directions will have obstacles in their paths - these directions still require a minimum clearance. These minimum clearances are further defined in this section. The plastic case is not included in this, only metal objects/components that will obstruct or come in close proximity to the antenna.


*Six spatial directions relative to FPC*

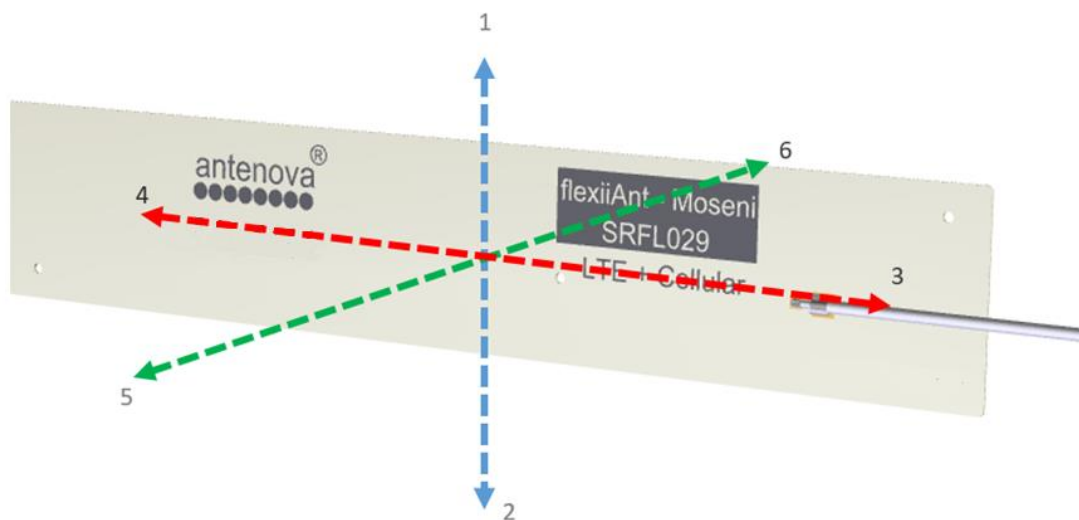

## 10.2 Orientation of FPC

The orientation of the FPC with respect to the host PCB should be defined depending on the unit. The proximity of the GND will have an influence on the antenna so the PCB location relative to the antenna should be considered.

The FPC will normally be placed in one of the three following options for orientation. In each option a distance (d) is the critical dimension to consider. The diagram below shows the minimum value of (d) for each. Other obstructions may increase this dimension.

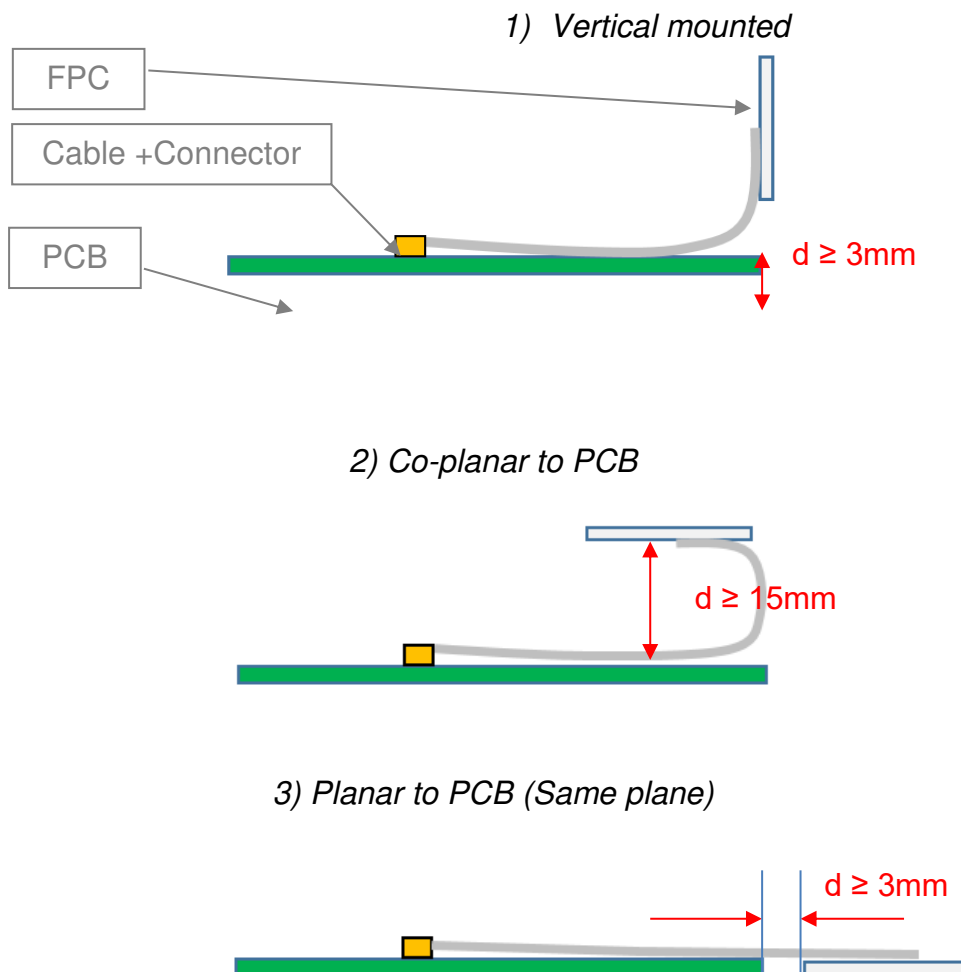

## 11. Hazardous Material Regulation Conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova's website.


## 12. Packaging

The antennas are stored in individual plastic (PE) bags, and then stored within a second bag of 100 pcs.

*Single antenna per bag*



*100 units per second bag (Labelled)*

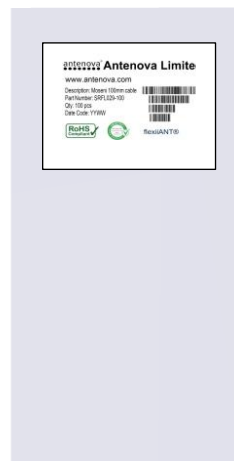

### 12.1 Optimal Storage Conditions

|               |  |
|---------------|--|
| Temperature   | -10°C to 40°C  |
| Humidity      | Less than 75% RH   |
| Shelf life    | 18 Months  |
| Storage place | Away from corrosive gas and direct sunlight                                    |
| Packaging     | Antennas should be stored in unopened sealed manufacturer's plastic packaging. |

The shelf life of the antenna is 18 months, provided the bag of 100 pieces remains factory sealed.

## 12.2 Label Information

**antenna<sup>®</sup> Antenova Limited**  
www.antenova.com

Description: Moseni 100mm cable  
Part Number: SRFL029-100  
Qty: 100 pcs  
Date Code: YYWW



flexiiANT<sup>®</sup>

**antenna<sup>®</sup> Antenova Limited**  
www.antenova.com

Description: Moseni 150mm cable  
Part Number: SRFL029-150  
Qty: 100 pcs  
Date Code: YYWW



flexiiANT<sup>®</sup>



## Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see [www.antenova.com](http://www.antenova.com).



## Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

It is our goal that every customer will create a high performing wireless product using Antenova's antennas. You will find a wealth of design resources, calculators and case studies to aid your design at our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a bespoke antenna to meet your requirement exactly.

## Contacts

Join our online antenna design community: [ask.antenova.com](http://ask.antenova.com)

Order antenna samples and evaluation boards at: [www.antenova.com](http://www.antenova.com)

Request a quotation for antennas by volume: [sales@antenova.com](mailto:sales@antenova.com)

Global Headquarters:

**Antenova Ltd, 2<sup>nd</sup> Floor Titan Court, 3 Bishop Square,  
Hatfield, AL10 9NA +44 (0) 1223 810600**

**Copyright® Antenova Ltd.** All Rights Reserved. Antenova®, gigaNOVA®, RADIONOVA®, the Antenova product family names and the Antenova logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies. The materials provided herein are believed to be reliable and correct at the time of printing. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.

# Antennas for Wireless Applications