


AMPMODU

TE Internal #: 1658525-4 Ribbon Cable Connectors, Wire-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors

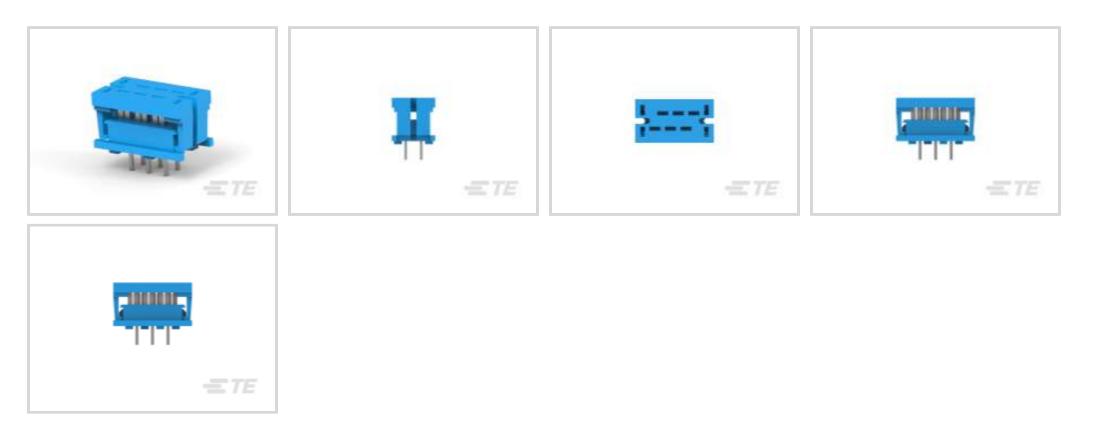

Connector System: Wire-to-Board

Number of Positions: 6

Centerline (Pitch): 2.54 mm [.1 in]

PCB Mount Retention: Without

PCB Mount Orientation: Vertical

Features

Product Type Features

Connector Product TypeConnector AssemblyConnector SystemWire-to-Board	
Connector System Wire-to-Board	
Connector & Housing Type Plug	
Connector & Contact Terminates To Printed Circuit Board, Wire & Cable	
Configuration Features	
Number of Positions 6	
PCB Mount Orientation Vertical	
Number of Rows 2	
Body Features	
Primary Product Color Blue	
Contact Features	
PCB Contact Termination Area Plating Material Thickness 2.54 µm[100 µin]	
Wire Contact Termination Area Plating Thickness 2.54 µm[100 µin]	

1658525-4

Ribbon Cable Connectors, Wire-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug



Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.36 mm[.014 in]
Rectangular Termination Post & Tail Width	.46 mm[.018 in]
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
PCB Mount Retention	Without
Mating Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

1658525-4

Ribbon Cable Connectors, Wire-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug




Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought



TE Part #1-87631-7

22 MODIV HSG COMP DR .100 POL

TE Part #1-111196-8

20 RCPT SYSTEM 50, LEAD FREE

TE Part #103653-6

07 MTE SHRD PIN HSG SR LATCH

TE Part #103653-3

04 MTE SHRD PIN HSG SR LATCH

1658525-4

Ribbon Cable Connectors, Wire-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug





Documents

Product Drawings 622-0653LF, PCB IDC, LEAD FREE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1658525-4_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1658525-4_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1658525-4_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Ribbon Cable Interconnect Solutions

English

Product Environmental Compliance MD_1658525-4_011620172348_dmtec

English

MD_1658525-4_011620172348_dmtec

English