


C4ATMBW5100A3NJ

C4AT, Film, Metallized Polypropylene, Power, 10 uF, 5%, 450 VAC, 850 VDC, 70°C, Lead Spacing = 52.5mm

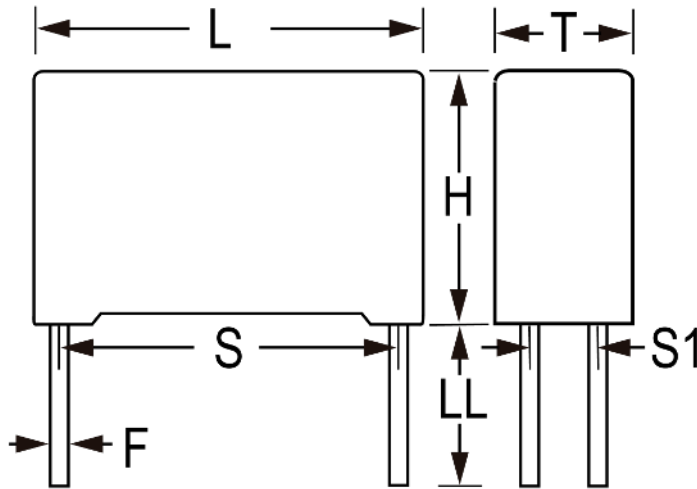

Click [here](#) for the 3D model.

Dimensions

L	57.5mm -0.7mm
H	50mm -0.7mm
T	35mm -0.7mm
S	52.5mm +/-0.4mm
S1	20mm +/-0.4mm
LL	6mm -2mm
F	1.2mm NOM

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	23

General Information

Series	C4AT
Dielectric	Metallized Polypropylene
Style	Radial
Features	Switching
RoHS	Yes
Lead	4 Wire Leads
AEC-Q200	No
Component Weight	120 g

Specifications

Capacitance	10 uF
Capacitance Tolerance	5%
Voltage AC	450 VAC
Voltage DC	850 VDC
Temperature Range	-40/+85°C
Rated Temperature	70°C
Dissipation Factor	0.05%
Max dV/dt	68 V/us
Resistance	2.5 mOhms (100kHz)
Ripple Current	29 Amps (100kHz 70C), 676 Amps (Peak)