

Ŧ	្រា	н т	m	0



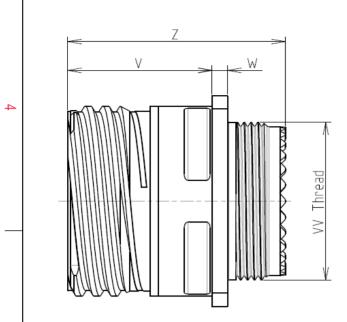

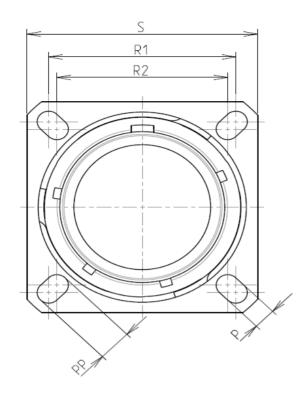

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C

: 2000 hours

: 9.3 g ± 10%

8D 0

G

11

Х

02

Ρ

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-02



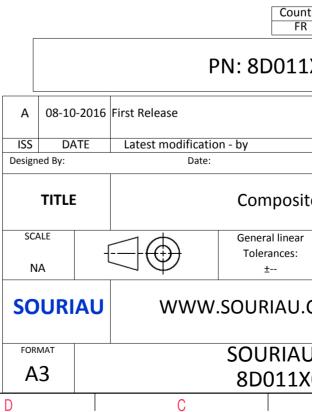

	Β			A			
							4
		5					
AS EXA	MPLE						3
whic er of th	non-conformit h does not co he Parties or k n, technical n	mply wi by a thire	th d party				
untry FR	Jurisd	liction & Not Li	Control List				2
1X(LX02PN						
						IOD N°	_
		CUST	OMER DRAV	VING	IV		
site l	e Receptacle 8D series						
ar :		NP	RDS / PROJE	СТ			
		Т	859 his document is	the prop	ertv	of	1
.COM SOURIAU it must not be reproduced or communicated without permission							
	DRG N°				9	SHEET	
X02	2PN-C		1			1/2	
	В			А			

ſ	т	G	г	m	D	0
		Contact Layout				Panel Cuto
4	.x .0 (2.	+Y IB IA +Y +X -Y .095 (2.41mm)			~	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi IC A B Shell size 11 -2	tion X-axis Y-axis 0 (mm) (mm) 4 +.095 (2.41) +.000 (.00) 8 095 (2.41) +.000 (.00) Number of Size Service Co	ntact ation Ali		¥	Dim
ω						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D011
					ISS DATE Designed By:	Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	SOURIAL
	Н	G	F	E	A3 D	8D011X

