



used for: D-SUB

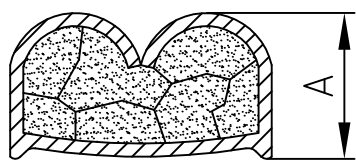


(b)

Wire size AWG	Crimp height A
28	0,61 - 0,76
26	0,66 - 0,81
24	0,66 - 0,86

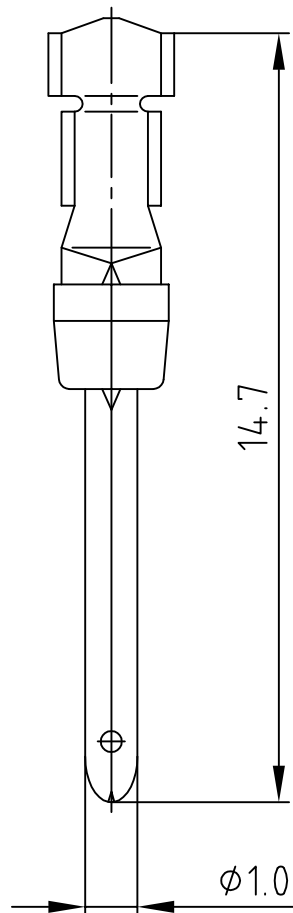

STRIPPING DIMENSIONS

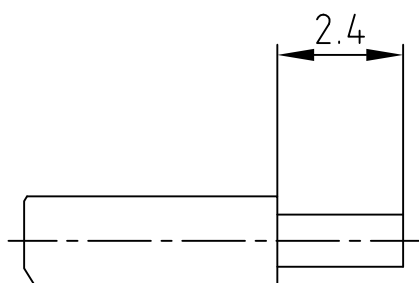

NOTES:

Material: Phosphor Bronze

(c) Finish: Gold Flash over Nickel in the Contact Area

Temperature Range: -55°C to +125°C

Rated Current: 5.0A

Contact Resistance: <= 10mOhm

Crimping: Use Crimp Tool 360X10079X

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm	
rev.	description	date	name	2005	date	name	
1 x c	Ä 4116	26.09.2011	Lehmen.	drawn	11.03.	Lehmenkühler	
1 x b	Ä 2197	01.04.2005	HS	appd.	11.03.	Mickenbecker	
a	Original			norm			
				d-old			



scale:	5:1
material:	SEE NOTES
title:	PLUG CONTACT CRIMP AWG 28-24
dwg no:	16K1A1341
part no:	161A13439X
	DIN-A 4 sh: 1/1