



| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
| A | | REVISED PER ECO-19-011232 | 07AUG2019 | RS | MZ |

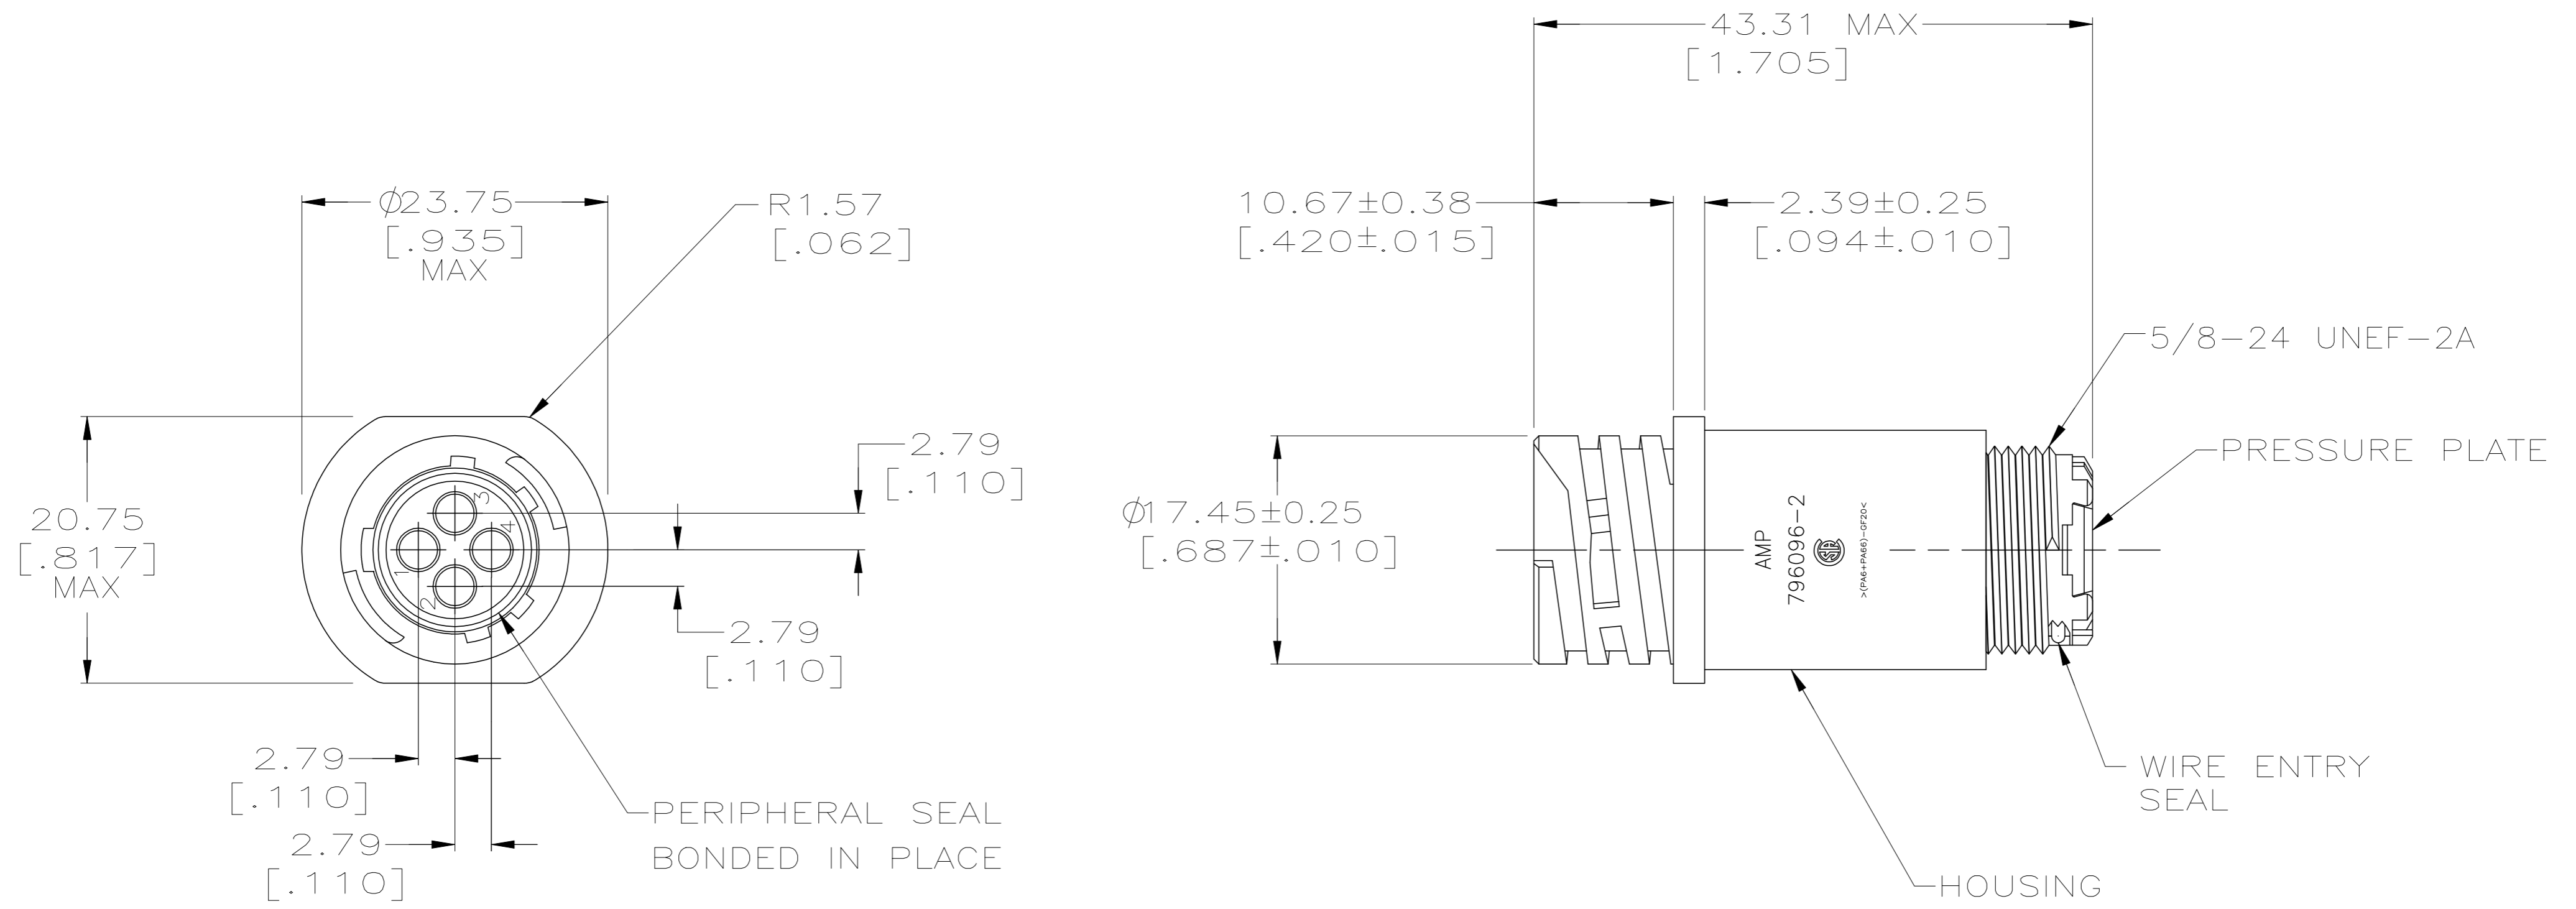

- THIS PART WILL ACCEPT FOUR (4) MULTIMATE PIN CONTACTS.
- HOUSING AND PRESSURE PLATE: NYLON, BLACK.
PERIPHERAL SEAL: ELASTOMER, BLACK.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.

796096-2
PART NUMBER

| | | | | | | | | | | | | | | |
|--|---------------|-------------------------------|--|------------|--------------------|------------------------|--------------------|-------|---------------|-------|-----|-------|-----|--------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN C.DORWART 24 SEP 98 |  TE Connectivity | | | | | | | | | | | |
| DIMENSIONS: mm [INCHES] | | CHK R.WALTER 24 SEP 98 | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD R.WALTER 24 SEP 98 | | | | | | | | | | | | |
| <table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± 0.13 [.005]</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table> | | 0 PLC | | | ± - | 1 PLC | ± - | 2 PLC | ± 0.13 [.005] | 3 PLC | ± - | 4 PLC | ± - | ANGLES |
| 0 PLC | ± - | | | | | | | | | | | | | |
| 1 PLC | ± - | | | | | | | | | | | | | |
| 2 PLC | ± 0.13 [.005] | | | | | | | | | | | | | |
| 3 PLC | ± - | | | | | | | | | | | | | |
| 4 PLC | ± - | | | | | | | | | | | | | |
| ANGLES | ± - | | | | | | | | | | | | | |
| MATERIAL | FINISH | PRODUCT SPEC - | APPLICATION SPEC - | SIZE A3 | CAGE CODE 00779 | DRAWING NO C=796096 | RESTRICTED TO - | | | | | | | |
| CUSTOMER DRAWING | | WEIGHT - | SCALE 2:1 | | SHEET 1 OF 1 | REV A | | | | | | | | |