

 	G	П	m	D	0



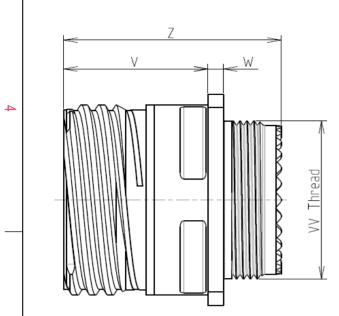

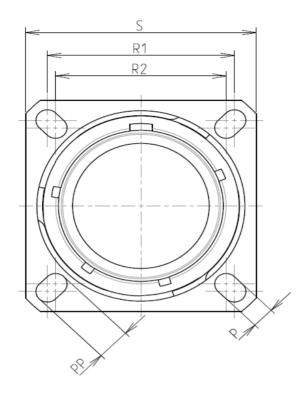

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 500 hours

: 29.53 g ± 10%

8D 0

G

11

S

01

Ρ


F

С

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

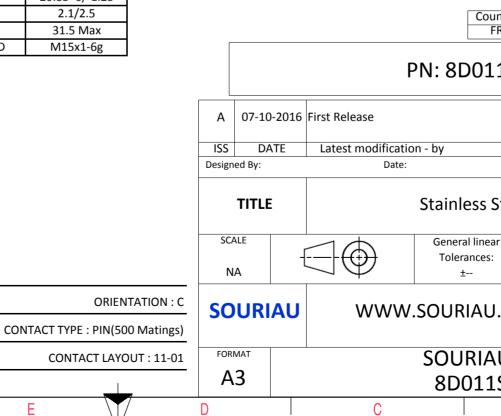

	Φ		A		
					4
AS EXA	MPLE				3
which of th dation untry R	on-conformit n does not co ne Parties or k n, technical no Jurisd	mply with by a third par			2
]	
		CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar :			PROJECT		
			59 cument is the prop	perty of	1
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
.501	LPC-C		A	1/2	J
	В		А		

		۵	г – – – – – – – – – – – – – – – – – – –	m	D	0
		Contact Layout				Panel Cutout
4	(01			22	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y 0 0			¥	Dim
ى ن			L			ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
0					A 07-10-202	Country FR PN: 8D011S
					ISS DATE Designed By: TITLE	Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011SC
l	Н	G	F	E	D	C

