

ROHS COMPLIANT

PRODUCT DATA DRAWING

	REVISION HISTORY						
REV	DESCRIPTION	DATE	APPROVED				
-	DCN 43148	02/17	MAL				

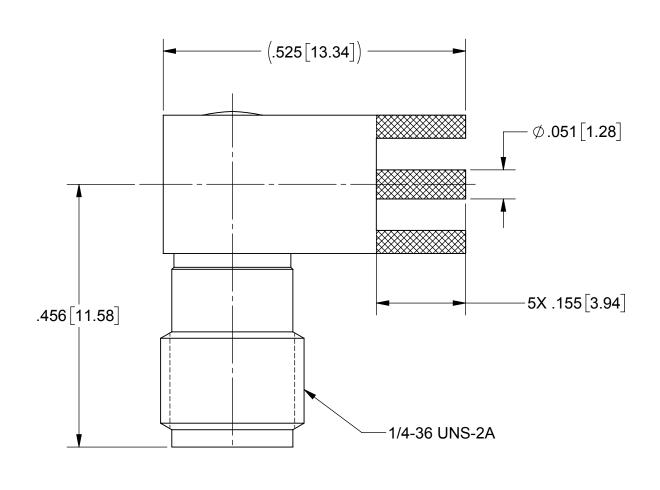

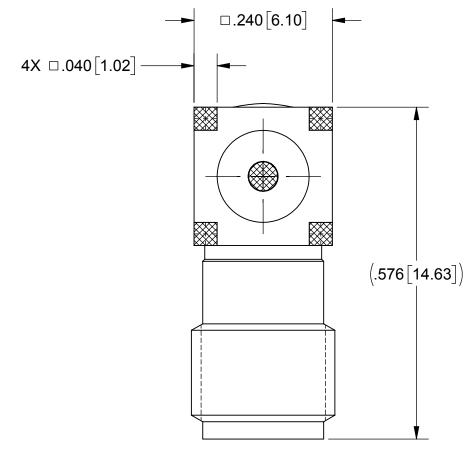

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

TERMINAL: BRASS PER ASTM B16, ALLOY UNS No. C36000

INSULATORS: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY, CONTACT &

TERMINAL:

GOLD PER ASTM B 488, TYPE II, CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00010" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 12.4 GHz

NOTES:

- 1. TO BE TIN DIPPED USING Sn96 SOLDER
- 2. ALL DIMENSIONS APPLY PRIOR TO SOLDER DIPPING

			ı				
MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 15T & LAST THREADS.		SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409		
FINISH:	SEE NOTES						
SURFACE AREA: N/A		.XXX ±.005 41, COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. PER ASME Y14.5M - 1994 71, REMOVE ALL BURRS 7, REMOVE ALL BURRS		SMA R/A JACK FOR			
PROPRIETARY			,		PRINTED CIRCUIT BOARD		
	ATION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE, INC. DUCTION IN PART OR AS A WHOLE IE WRITTEN PERMISSION OF AVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN:	VB 02/28/17		Inua Na	
ANY REPROD			CHECKED:	MAL 02/28/17	SIZE CAGE CODE DWG. NO. 2986-6		01-TD
SV MICROWA			APPROVED:	MAL 02/28/17	SCALE: 4:1		SHEET 1 OF 1