


CX2155NL

- BALUN TRANSFORMER
- 2-1600 MHz, 1:4
- IMPEDANCE = 75 OHMS
- SURFACE MOUNT

ELECTRICAL SPECIFICATIONS: @ 25°C





INSERTION LOSS:

FREQUENCY	ATTENUATION(S21)
2 MHz	-1.0 dB MAX
4 MHz	-0.8 dB MAX
500 MHz	-0.9 dB MAX
1000 MHz	-1.0 dB MAX
1600 MHz	-1.3 dB MAX
*REFERENCE	ATTENUATION
78.5 MHz	-0.6 dB MIN -1.5 dB MAX




SCHEMATIC

MECHANICAL SPECIFICATIONS:

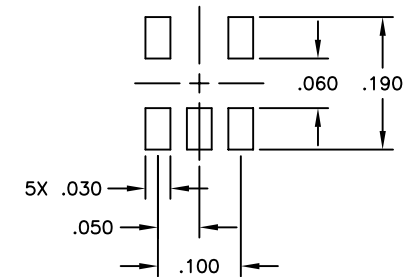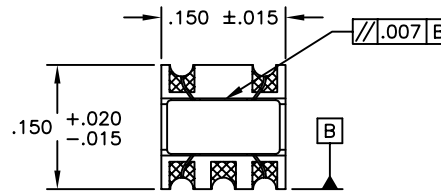

SUGGESTED LAND PATTERN

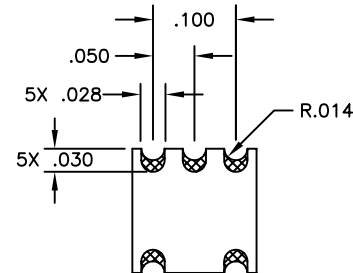

NOTES: UNLESS OTHERWISE SPECIFIED

- OPERATING TEMPERATURE: -40°C TO +85°C
- STORAGE TEMPERATURE: -50°C TO +125°C
- COMPLIANCE TO J-STD:
 - J-STD-002: SOLDERABILITY AT REFLOW PEAK TEMPERATURE OF 245°C
 - J-STD-020: MSL 1, NO MOISTURE SENSITIVE
 - J-STD-075: R6, 250°C MAXIMUM THROUGH REFLOW SOLDER
- DIMENSIONS ARE IN INCHES.
 - TOLERANCE:
 - .XX ±.01
 - .XXX ±.005
- OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: CX2155NLT

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/04/2014)

PRODUCT DESCRIPTION:

TRANSFORMER, BALUN, 1:4, 2-1600MHz, SM

SHEET:

1 OF 1

PART NO.

CX2155NL

DATASHEET REV.

A