




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	31.0	± max
	T:	6.0	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	7.80	± nom
	C:	3.22	± nom

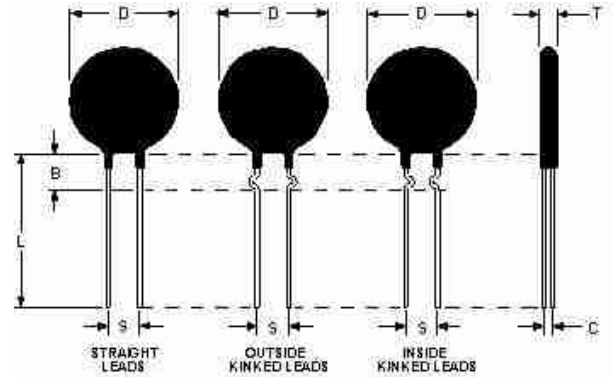

Electrical Specifications

	Resistance:	0.3	Ω	± 25 %
	Max Steady State Current upto 65°C:	30.00	A	
	Max Rec. Energy Rating:	100	J	
	Actual Failure Instantaneous Energy:	200	J	
	Maximum Capacitance @ 120 VAC:	6,946	µf	
	Maximum Capacitance @ 240 VAC:	1,736	µf	
	Resistance @ 100% Max Current:	0.01	Ω	
	Resistance @ 50% Max Current:	0.02	Ω	
	Body Temperature at 100% Max Current:	190.00	°c	
	Dissipation Constant:	45.4	mw/°c	
	Thermal Time Constant:	194	Sec.	
	Material Type (for Beta and Curve):	A		

SL32 0R230	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a