


NOTES: UNLESS OTHERWISE SPECIFIED

1. AVAILABLE IN:  
25 FT, 50 FT, 100FT, 500FT, AND 1,000 FT SPOOLS
2. PERFORMANCE:  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

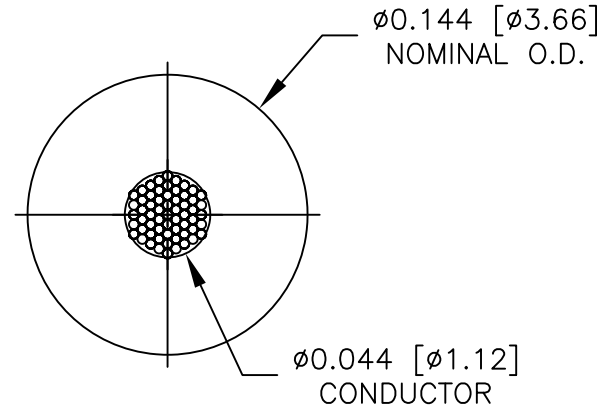

ACTUAL SIZE

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm N/A$ .XX $\pm N/A$ $\pm N/A$ .XXX $\pm 0.006$	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
		MATERIAL WIRE: TINNED COPPER INSULATION: PVC	DRAWN	R.L.	7/15	18 AWG 65X36 TINNED COPPER, PVC INSULATED WIRE		
			APPROVED BY					
		FINISH AVAILABLE IN ALL TEN COLORS.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				<b>A</b>	<b>08505</b>	9506	
APPLICATION		DO NOT SCALE DRAWING			SCALE	10:1	SHEET 1 OF 1	