

| т | ۵ | н т | m | C C |
|---|---|------------|---|-----|
| | | | | |



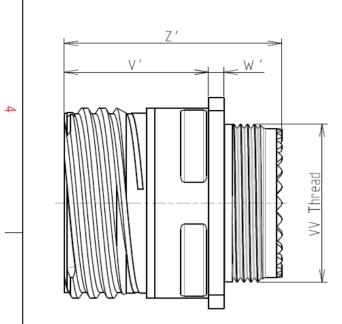

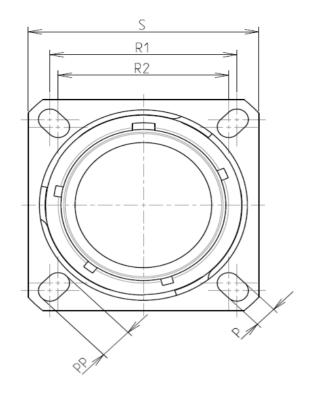

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | | | |
|--|--|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | - 65℃ to +175℃ | | | |

: 2000 hours

8D 0

G

13

J

03

Ρ

F

А


| Dim | Nominal |
|-----------|-------------|
| Р | 3.25±0.2 |
| РР | 4.93±0.2 |
| R1 | 23.01 |
| R2 | 20.62 |
| S | 28.6±0.3 |
| V' | 19.5+1.4/-0 |
| W' | 2.1/3.65 |
| Ζ' | 32 Max |
| VV THREAD | M18x1-6g |


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-03



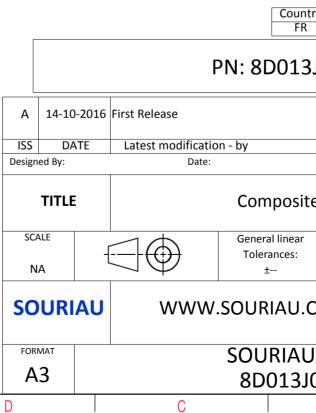

| | σ | 1 | A | | |
|--|---|-------------------------------|----------|--------|---|
| | | I | | | |
| | | | | | 4 |
| | | | | | 3 |
| | AMPLE | | | | |
| any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.) | | | | | |
| untry FR | Jurisd | liction & Conti Not Listed | rol List | | 2 |
| .3J(| BJO3PA | | | | |
| | | | | | |
| | | CUSTOMER | | MOD N° | |
| site | e Receptacle 8D series | | | | |
| ar | | | PROJECT | | |
| | | 85 | | | 1 |
| J.CC | I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | |
| U I | DRG N° | | | SHEET | |
| 310 3 | 3PA-C | | | 1/2 | J |
| | В | | А | | |
| | | | | | |

| | | ۵ | н г | m | | 0 | |
|----------|--------------------|--|------------|---|------------------------|---|-------------------------------|
| | | Contact Layout | | | | F | Panel Cutor |
| 4 | | 03 () () () () () () () () () () () () () | | | ž | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| | Ctc A B C | 13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47 | | | <u>.</u> | Dim | ØT |
| ى ن | | | | | | ØA ØAA R1 ØT | |
| | - | | | | | SOURIAU shall not be lia | able for an |
| | | | | | | due to a use of the P the Specifications issued l (professional rec | Products wh by either o |
| N | | | | | | | Countr FR |
| | | | | | | PN: 8 | 3D013. |
| | | | | | A 14-10- | 2016 First Release | |
| | | | | | ISS DA Designed By: | TE Latest modification - by Date: | |
| | | | | | TITLE | Со | mposite |
| <u> </u> | | | | | SCALE NA | | eral linear lerances: ± |
| | | | | | SOURI | AU WWW.SOU | RIAU.C |
| | | | | _ | FORMAT A3 | | URIAU D013J(|
| l | Н | G | F | E | D | С | |

