

# VCCM600S

## INDUSTRIAL DATA SHEET



AC/DC Conduction Cooled Configurable Power Supply

**VOXPOWER**



600W

Scalable

4" x 7" x 1.61"

Small

Fan-less

Silent

Cool it your way: Conduction | Convection | Forced Air

The VCCM600S conduction cooled configurable power supply delivers a silent 600 Watts and up to 750 Watts of peak power for 5 seconds in a rugged 4" x 7" package and is the ultimate power solution for applications where reliability or audible noise are of concern. The product combines the advantages of a modular and configurable power supply with the high reliability of a fan-less architecture. Depending on your application, the VCCM600S can be configured as a conduction, convection or forced air cooled solution and this versatility allows the unit to be seamlessly integrated across a vast range of applications, which makes it perfect for standardising your power platform.

Designed with highest reliability and versatility in mind, the VCCM600S is suitable for applications ranging from the most controlled to the harshest of environments. Standard features include full output voltage adjust range, externally controllable voltage and current and series & paralleling of outputs. The unique design approach and heat dissipation techniques allows the unit to be mounted in virtually any orientation giving system designers even more flexibility. The series is approved to latest industrial safety (IEC/UL60950-1 2<sup>nd</sup> Edition & IEC/UL62368-1 2<sup>nd</sup> Edition) and EMC standards and features market leading specifications and design in application support.

## MAIN FEATURES

- |  |  |                                      |
|--|--|--------------------------------------|
| • 600 Watts output ( $V_{in} > 120V_{RMS}$ ) | • High efficiency – up to 90%              | • IEC60601 Ed. 3 (Immunity to Ed. 4) |
| • Peak power capability (750W 5sec)          | • Additional 5V 1A bias supply             | • MIL-STD 810G                       |
| • 7" x 4" x 1.61" footprint                  | • Remote voltage & current programming     | • MIL-STD 461F                       |
| • Convection/Conduction/Forced-Air cooled    | • Current output signal                    | • MIL-STD 704F                       |
| • Modular & user configurable                | • Accurate current sharing                 | • SEMI F47 compliant                 |
| • Low power standby mode (<1W)               | • Programmable start-up state (Laser Apps) | • 5 Year warranty                    |

## APPLICATIONS

- |                                |                                   |                           |
|--------------------------------|-----------------------------------|---------------------------|
| • Test & Measurement equipment | • Laboratory & Analysis equipment | • LED lighting            |
| • Robotics                     | • Display                         | • High vibration & shock  |
| • Oil & Gas                    | • Avionics                        | • Retrofit of legacy PSUs |
| • Telecommunications           | • Lasers                          |                           |

## CUSTOMER BENEFITS

- |                                    |                                  |                            |
|------------------------------------|----------------------------------|----------------------------|
| • Fast time to market              | • Proven technology              | • Technology consolidation |
| • 24 hrs samples from distribution | • Eliminates custom design costs | • Supplier consolidation   |
| • Safety & EMC certified           | • Field replaceable              |                            |
| • World class engineering support  | • Low cost of ownership          |                            |

# SPECIFICATIONS

INPUT MODULE SPECIFICATIONS					
Parameter	Details	Min	Typical	Max	Units
AC Input Voltage	Nominal range is 100V <sub>RMS</sub> to 240V <sub>RMS</sub>	85		264	V <sub>RMS</sub>
AC Input Frequency	Contact factory for 400Hz operation.	47	50/60	63	Hz
DC Input Voltage	Not covered by safety approvals. Contact Vox Power.	120		370	V <sub>DC</sub>
Output Power Rating	De-rate linearly from 600Watts at 120V <sub>RMS</sub> to 425Watts at 85V <sub>RMS</sub>			600	Watts
Input Current	600Watts output at 120 V <sub>RMS</sub> input			6	Amps
Input Current Limit			7		Amps
Inrush Current	265V <sub>RMS</sub> , 25°C (cold start)			20	Amps
Fusing	Each line fused (5x20 Fast acting)			8	Amps
Efficiency	See graphs			90	%
No load Power consumption	All outputs fitted and disabled/enabled		10/21		Watts
Standby Power	Latched off state, 120V <sub>RMS</sub>		0.5	1	Watts
Power Factor			0.99		
Holdup	600Watts output at 120V <sub>RMS</sub> input	17	20	21	mS
UVP	Turn on under voltage protection	78		84	V <sub>RMS</sub>
Over temperature	Internally monitored.	115		125	°C
Reliability <sup>(1)</sup>	Input module			1.1	FPMH
	Transformer module			0.4	FPMH
Warranty	Standard terms and conditions apply			5	Years
Size	177.8 (L) x 101.6 (W) x 41.0 (H). See diagram for tolerance details				mm
Weight	650 + 100 per output module				Grams
Note 1.	30°C base & ambient, 100% load, SR332 Issue 2 Method I, Case 3, Ground, Fixed, Controlled To ensure reliability, component temperatures must be maintained below recommended levels in the end application. The "System cooling" section of the user manual should be reviewed in detail and temperatures verified in the end application.				

GLOBAL SIGNALS SPECIFICATIONS					
Parameter	Details	Min	Typical	Max	Units
Bias Voltage		4.8	5	5.2	Volts
Bias Current				1	Amps
AC_OK Voltage	Low output level High output level	0 4.8	0.03 5	0.1 5.2	Volts
AC_OK Current				10	mA
Power Good Voltage	Open collector output. Low output level. All slots. Absolute maximum = 6V.	0.1		0.3	Volts
Power Good Current	Open collector output. Current sink only. All Slots.			50	mA
Tsns Voltage	Typical at 0°C internal temperature, 19.5mV/°C	0	0.4	5	Volts
Tsns Current				100	uA
Inhibit Voltage	Low input level. All slots. High input level. All slots.	0 2.5		6 6	Volts
Inhibit Current	10k input impedance. All slots.			1	mA

OUTPUT MODULE SPECIFICATION SUMMARY												
MODEL	Output Voltage			Output Current	Rated Power	Peak Power	Load Reg.	Line Reg.	Cross Reg.	Ripple & Noise	FPMH <sup>(1)</sup>	Feature Set <sup>(2)</sup>
	Min.	Nom.	Max.									
OPA	1.5V	5V	7.5V	25A	125W	187.5W	±50mV	±5mV	±10mV	50mV <sub>PP</sub>	0.5	ABCDEFGF
OPB	4.5V	12V	15V	15A	150W	225W	±100mV	±12mV	±24mV	120mV <sub>PP</sub>	0.5	ABCDEFGF
OPC	9V	24V	30V	7.5A	150W	225W	±150mV	±24mV	±48mV	240mV <sub>PP</sub>	0.5	ABCDEFGF
OPD	18V	48V	58V	3.75A	150W	217.5W	±300mV	±48mV	±96mV	480mV <sub>PP</sub>	0.5	ABCDEFGF
Note 1.	Output module, 30°C base, 100% load, SR332 issue 2 Method I, Case 3, Ground, Fixed, Controlled											
Note 2.	A = Remote Sense, B = External Voltage control, C = External constant current control, D = Current output signal, E = Current share, F = Over Voltage protection, G = Over temperature protection											

SAFETY SPECIFICATIONS			
Parameter	Details	Max	Units
Isolation Voltages	Input to Output (2 MOPP). Do not perform test on assembled unit <sup>(1)</sup>	4000	V <sub>AC</sub>
	Input to J2 standby control (2 MOPP)	4000	V <sub>AC</sub>
	Input to Chassis (1 MOPP)	1500	V <sub>AC</sub>
	Global signals (J3) to Output/Chassis	500	V <sub>DC</sub>
	Output to Output/Chassis (Standard modules)	500	V <sub>DC</sub>
Earth Leakage Current	Normal condition, 264V <sub>AC</sub> , 63Hz, 25°C	1500	uA
Touch Leakage Current	Output to Earth. Standard modules 264V <sub>AC</sub> , 63Hz, 25°C NC/SFC	20/200	uA
Patient Leakage Current	Standard modules 264V <sub>AC</sub> , 63Hz, 25°C NC/SFC <sup>(2)</sup>	-----	uA
Note 1.	Testing an assembled unit to 4000V <sub>AC</sub> may cause damage. Please refer to application note (APN-002) on Vox Power website or contact Vox Power representative.		
Note 2.	Not Applicable		

INSTALLATION SPECIFICATIONS			
Parameter	Details	Parameter	Details
Equipment class	I	Flammability Rating	94V-2
Overvoltage category	II	Ingress protection rating	IP10
Material Group	IIb (indoor use only)	ROHS compliance	2011/65/EU & 2015/863/EU
Pollution degree	2	Intended usage environment	Industrial Equipment

ENVIRONMENTAL SPECIFICATIONS						
Parameter	Details	Non-Operational		Operational		Units
		Min	Max	Min	Max	
Air Temperature	Operational limits subject to appropriate de-ratings	-51	+85	-40 <sup>(1)</sup>	70	°C
Humidity	Relative, non-condensing	5	95	5	95	%
Altitude		-200	5000	-200	3000	m
Shock	EN 60068-2-27: Half sine, 3 axes, 3 positive & 3 negative. 810G: Method 516.6, Procedure IV, Transit drop		50, 11		30, 18	g, mS
Vibration	EN 60068-2-6: Sine, 10 – 500 Hz, 3 axes, 1 oct/min., 10 cycles each axis EN 60068-2-64: Random, 5 – 500 Hz, 3 axes, 30 min. 810G: Method 514.6, Procedure I (General Vibration) Category 4 (Trucks & Trailers, Composite wheeled vehicle), Figure 514.6C-3. Category 7 (Aircraft, Jet cargo), Figure 514.6C-5 General exposure Category 24, (All, Minimum integrity) Figure 514.6E-1		0.02, 2.56		2 0.0122, 1	g g <sup>2</sup> /Hz, g <sub>RMS</sub>
Thermal shock	MIL-STD-810G Method 503.5 Procedure I-C. Multi-cycle. 3 shocks.	-51	85			°C
Notes	1. Some specifications may not be met below -20°C.					

ELECTROMAGNETIC COMPLIANCE – EMISSIONS		
Phenomenon	Basic EMC Standard	Test Details
Radiated emissions, electric field	EN55011/22	Class B compliant
Radiated emissions, electric field, 30Hz-18GHz.	MIL-STD-461F: RE102 (Ground, Fixed)	Compliant (When mounted in enclosure)
Conducted emissions	EN55011/22, FCC part 15, CISPR 22/11	Class B compliant
Conducted emissions, power leads, 10kHz-10Mhz.	MIL-STD-461F: CE102	Compliant (External filter may be required)
Harmonic Distortion	IEC61000-3-2	Compliant
Flicker & Fluctuation	IEC61000-3-3	Compliant

ELECTROMAGNETIC COMPLIANCE – IMMUNITY		
Phenomenon	Basic EMC Standard	Test Details
Electrostatic discharge	IEC61000-4-2	Test level 4: 15kV air, 8kV contact
Radiated RF EM fields	IEC61000-4-3	Test Level 3: (10V/m, 80MHz-2.7GHz) sine wave AM 80% 1kHz
Proximity fields from RF wireless communications equipment	IEC61000-4-3	Test levels as per IEC60601-1-2:2014 Table 9
Radiated susceptibility, electric field, 2 MHz to 40 GHz.	MIL-STD-461F: RS103	20V
Electrical Fast Transients/bursts	IEC61000-4-4	Test Level 3: (2kV Power, 1kV I/O) 5kHz(ed3) & 100kHz(ed4)
Conducted susceptibility, Bulk cable injection, impulse excitation	MIL-STD-461F: CS115	
Surges	IEC61000-4-5	Test Level 3: 1kV L-N, 2kV L-E
Conducted susceptibility, damped sinusoidal transients, cables and power leads, 10kHz-100MHz	MIL-STD-461F: CS116	
Shipboard Electric Power. Voltage Spike Test	MIL-STD-1399, SECTION 300A	Type 1, 115V 60Hz single phase
Conducted disturbances induced by RF fields	IEC61000-4-6	Test Level 3: 10V, 0.15 to 80Mhz sine wave AM 80% 1kHz
Conducted susceptibility, power leads, 30Hz-150kHz	MIL-STD-461F: CS101	
Conducted susceptibility, Bulk cable injection, 10kHz-200Mhz	MIL-STD-461F: CS114	
Power Frequency Magnetic Fields	IEC61000-4-8	Test level 4: 30A/m 50Hz
Radiated susceptibility, Magnetic field, 30Hz-100kHz	MIL-STD-461F: RS101	
Voltage Dips	IEC61000-4-11 <sup>(2)</sup>	0% 10ms, 0% 20ms (Criterion A) 70% 0.5s, 40% 200ms (Criterion A at 240V and Criterion B at 100V)
Voltage Sag Immunity	SEMI-F47-0706 <sup>(2)</sup>	0% 20mS, 80% 1s, 80% 10s, 90% continuous (Criterion A) 70% 0.5s, 50% 200mS (Criterion A at 240V and Criterion B at 100V) Criterion A is achieved for full power when Vin >= 160V Criterion A is achieved at all input voltages when Pout <= 350W
Voltage interruptions	IEC61000-4-11	0% 250/300 cycle as per IEC60601-1-2:2014 (Criterion B)
Aircraft Electric Power Characteristic	MIL-STD-704F	SAC102,104,105,109,110 (MIL-HDBK-704-2) & SXF102,104,105,109,110 (MIL-HDBK-704-6)

Notes:

1. Criterion A = No degradation of performance or loss of function.  
Criterion B = Temporary degradation of performance or loss of function is allowed, provided the function is self-recoverable.  
Criterion C = Temporary loss of function is allowed but requires operator intervention to recover.
2. Tested at nominal range (100V to 240V). Line deratings applied where appropriate.

AGENCY APPROVALS		
Standard	Details	File
IEC 60950-1:2005+AMD1:2009+AMD2:2013	2nd Edition. Information Technology Equipment - Safety - Part 1: General Requirements	
UL 60950-1:2007	2nd Edition. Information Technology Equipment - Safety - Part 1: General Requirements	UL: E316486
CAN/CSA - C22.2 No. 60950-1-07 (R2012):2007+AMD1:2011+AMD2:2014	2nd Edition. Information Technology Equipment - Safety - Part 1: General Requirements	
IEC 62368-1:2014	2nd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	
UL 62368-1:2014	2nd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	UL: E316486
CAN/CSA - C22.2 No. 62368-1-14	2nd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	
CE MARK	LVD 2014/35/EU, EMC 2014/30/EU	
CB certificate and report available on request		


## THERMAL PERFORMANCE

### Details

#### Conduction cooled


Apply appropriate deratings to both input and output modules based on ambient and baseplate temperatures.  
 Ambient derating applies to input module rated & peak power.  
 Baseplate derating applies to output module power and current, and bias supply power.  
 Plot shows rated power of a fully configured system with 4 x 150W output modules fitted.  
 Similar deratings apply to input module peak power, output module peak power and output module current.  
 See user manual for a detailed explanation and example calculations.  
 Any mounting orientation is allowed.

### Performance curves

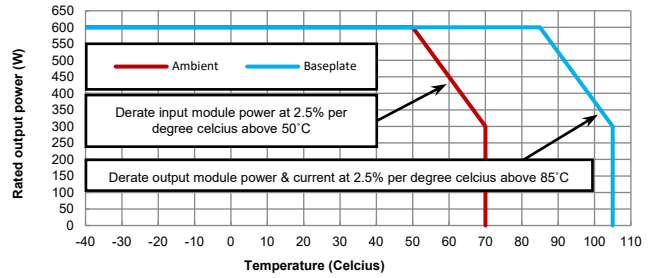


#### Forced Air cooled

Plot shows typical performance of a fully configured VCCM600S-CCCC system under controlled conditions with no heatsink attached and unit mounted 25mm from surface.  
 Unit mounted in orientation A with air flow in X direction, 220 V<sub>RMS</sub> input voltage.  
 Actual ratings must be determined in the user application.  
 See user manual for more detailed information.

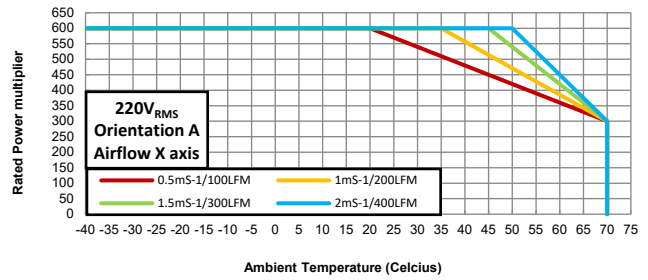


#### Convection cooled

Plot shows typical performance of a fully configured system under controlled conditions.  
 Solid line shows performance with no heatsink attached.  
 Dashed line shows performance with standard Vox heatsink attached.  
 Unit mounted in orientation E in free space, 220 V<sub>RMS</sub> input voltage.  
 Actual ratings must be determined in the user application.  
 See user manual for more detailed information.

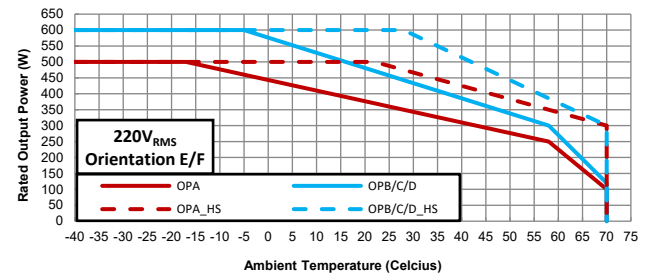

### Orientation definitions

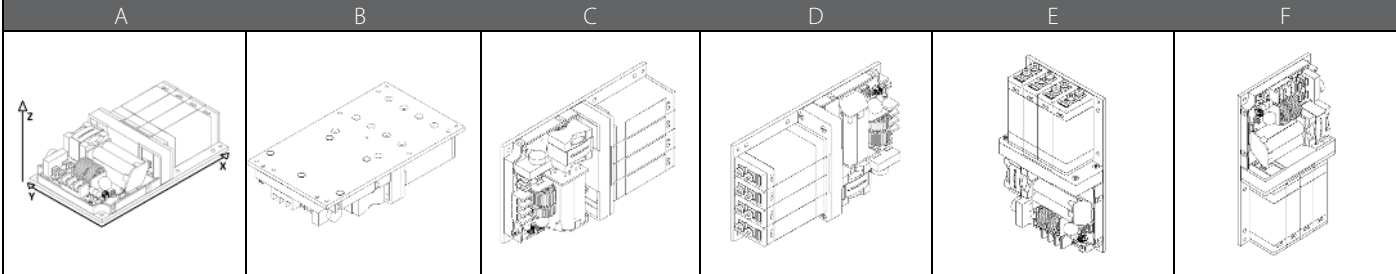


#### Notes


1. Line and other deratings applied where appropriate.
2. Ambient temperature is the temperature immediately surrounding the unit.

## TYPICAL EFFICIENCIES

Typical Load Efficiency at 120V<sub>RMS</sub> input voltage

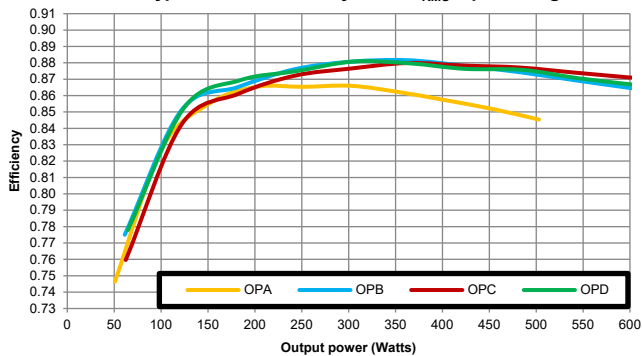


Typical Load Efficiency at 220V<sub>RMS</sub> input voltage

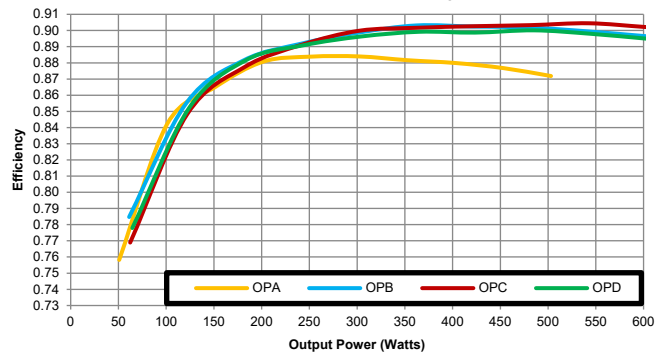

## MECHANICAL DIMENSIONS AND MOUNTING SCREWS


Location	Details	Penetration	Tightening
Baseplate Mount: M1 – M6	Hole size, Diameter 5.00mm	4mm Baseplate thickness	0.55NM
Output Module Mount: O1 – O8	M3 CSK	M3 CSK screw, 8mm max length	0.5NM
Input module Mount: F1 – F5	Do not remove or adjust	Do not remove or adjust	Do not remove or adjust
Transformer module Mount: F6 – F7	M3 CSK	M3 CSK screw, 6mm max length	0.5NM
Output Module Terminal	M4 SEM	M4 SEM screw, 8mm max length	0.55NM

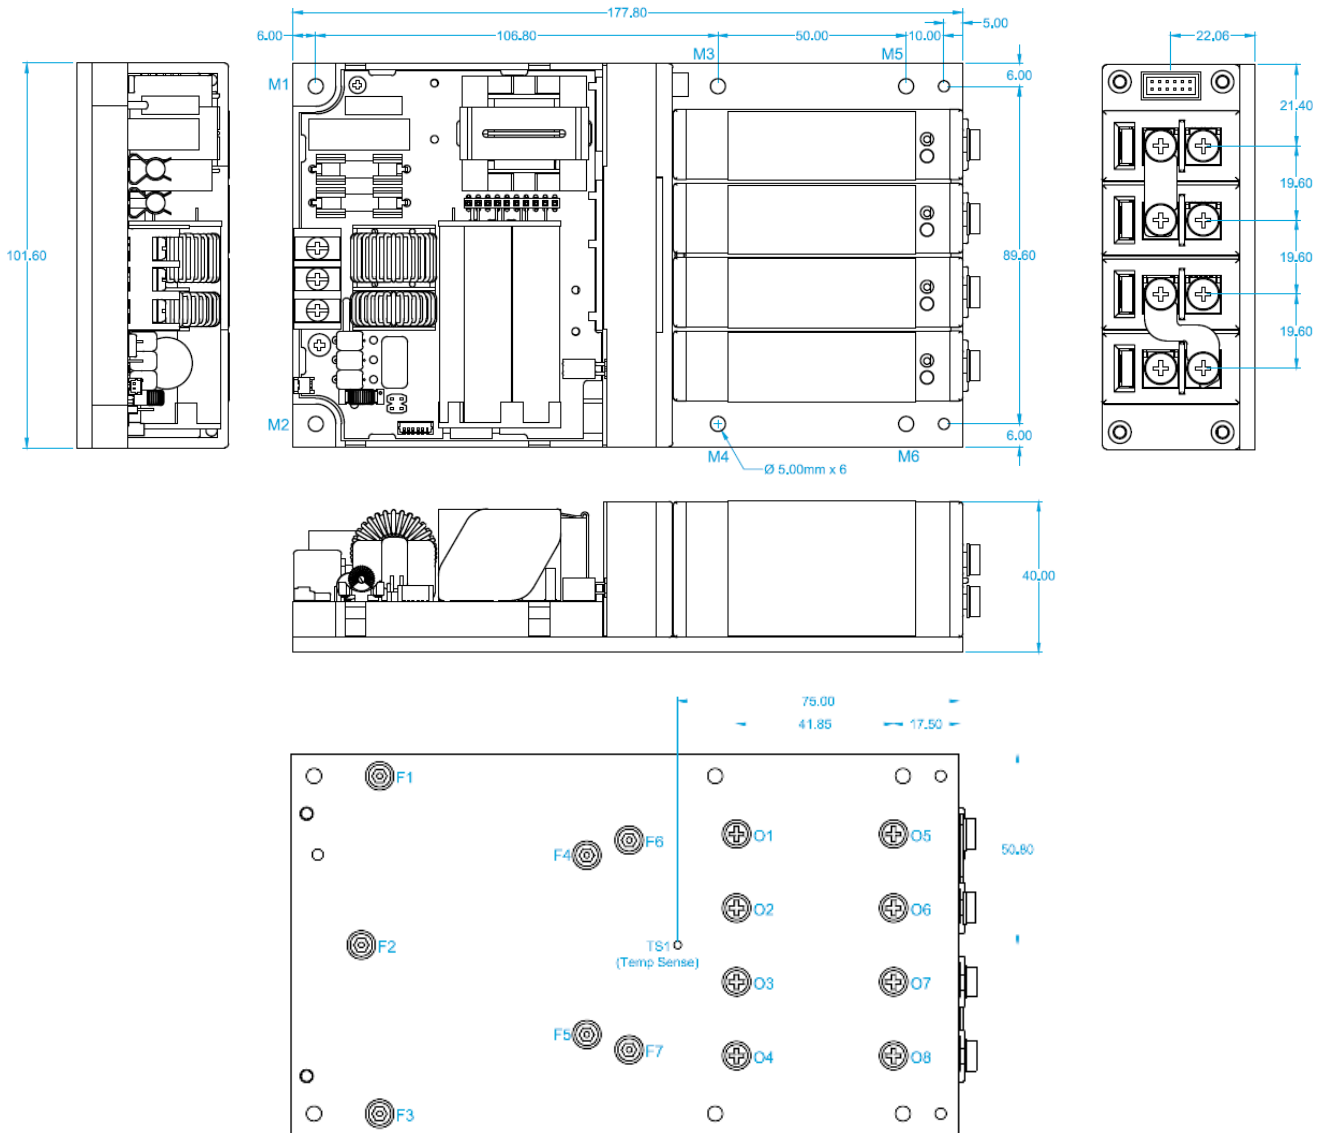

Unless stated otherwise, all dimensions are in millimetres and in accordance with DIN 2788-1-2 C: A55 C

## CONNECTOR DETAILS

PINOUTS	
Circuit	Details
<b>J1 – Mains Input</b>	
1	Live
2	Neutral
3	Earth
<b>J2 – Standby control</b>	
1	Standby control negative
2	Standby control positive
<b>J3 – Global Signals</b>	
1	Slot 4 - Power Good
2	Slot 4 - Inhibit
3	Slot 3 - Power Good
4	Slot 3 - Inhibit
5	Slot 2 - Power Good
6	Slot 2 - Inhibit
7	Slot 1 - Power Good
8	Slot 1 - Inhibit
9	Temperature sense ( $T_{SINK}$ )
10	AC OK
11	+5V (Bias Supply 1A)
12	COM
<b>J4 -Output Signals</b>	
1	- Sense
2	+ Sense
3	COM
4	I Control
5	V Control
6	+5V (Bias Supply 10mA)

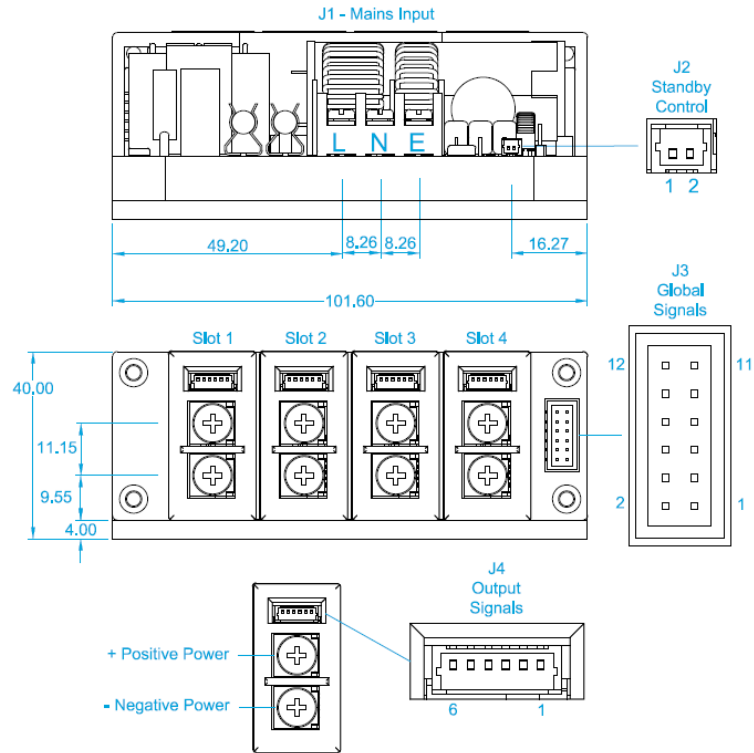


Unless stated otherwise, All dimensions are in millimeters and in accordance with DIN2768-1/2 CLASS C

### MATING CONNECTORS

Ref.	Details	Manufacturer	Housing	Terminal
J1 - Mains Input	3 Pin, Barrier, 6-32 Steel Screws, 0.8 Nm or 7 Lb-In Torque <sup>(1)</sup>			
J2 - Standby control	2 Pin, 1.25mm, with Friction Lock, 28-30AWG	MOLEX	0510210200	0500588000
J3 - Global Signals	12 Pin, 2mm, with Friction Lock, 24-30 AWG, WIRE TO BOARD	MOLEX	0511101260	0503948051
	12 Pin, 2mm, with Friction Lock, 24-30 AWG, IDT CABLE TO BOARD	MOLEX	0875681273	
J4 - Output Signals	6 PIN, 1.25mm, with Friction Lock, 28-30AWG	MOLEX	0510210600	0500588000
Output Power	Positive/Negative, M4 terminal, 0.5Nm, use appropriately rated crimp terminal			

Notes  
 1. Cable 14-18AWG, 300V, 16A, 105°C, use appropriately rated crimp terminal.  
 2. Direct equivalents may be used for any connector parts.  
 3. All cables must be rated 105°C min, equivalent to UL1015

### PART NUMBERS AND ORDERING INFORMATION

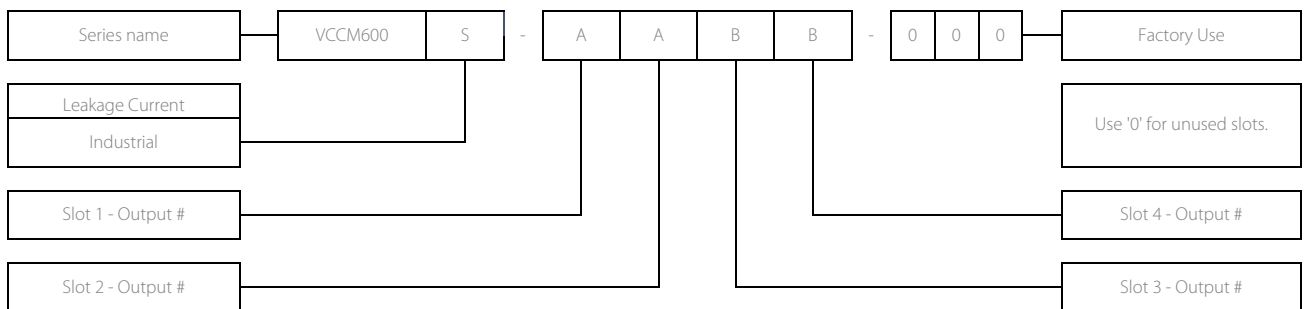

Contact your Distributor or Vox Power for special configuration requirements. The factory may allocate a 3 digit suffix to identify such requirements.

All specifications are believed to be correct at time of publishing. Vox Power Ltd reserves the right to make changes to any of its products and to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Vox Power Ltd does not assume any liability arising out of the use or application of any of its products and of any information to the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any products of Vox Power Ltd. VOX POWER LTD DISCLAIMS ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF SUITABILITY, FITNESS FOR PURPOSE, MERCHANTABILITY AND NON-INFRINGEMENT. Please consult your local distributor or Vox Power directly to ensure that you have the latest revision before using the product and refer to the latest relevant user manual for further information relating to the use of the product. Vox Power Ltd products are not intended for use in connection with life support systems, human implantations, nuclear facilities or systems, aircraft, spacecraft, military or naval missile, ground support or control equipment used for the purpose of guidance navigation or direction of any aircraft, spacecraft or military or naval missile or any other application where product failure could lead to loss of life or catastrophic property damage. The user will hold Vox Power Ltd harmless from any loss, cost or damage resulting from its breach of these provisions.