



Electrical Specifications

Center Frequency: 7.42 MHz
Bandwidth: 2 MHz Min.
Insertion Loss: 2.0dB Max.
Return Loss: 14dB Min.
Rejection: ≥ 40 dB @ 0-3.6 MHz
Rejection2: ≥ 40 dB @ 11 MHz
Rejection3: ≥ 60 dB @ 14.8 MHz


Mechanical

Mounting Method: Through Holes
Connector Type: SMA(F)
Dimensions: 1.5" X 0.75" x 0.5" .

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -40°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

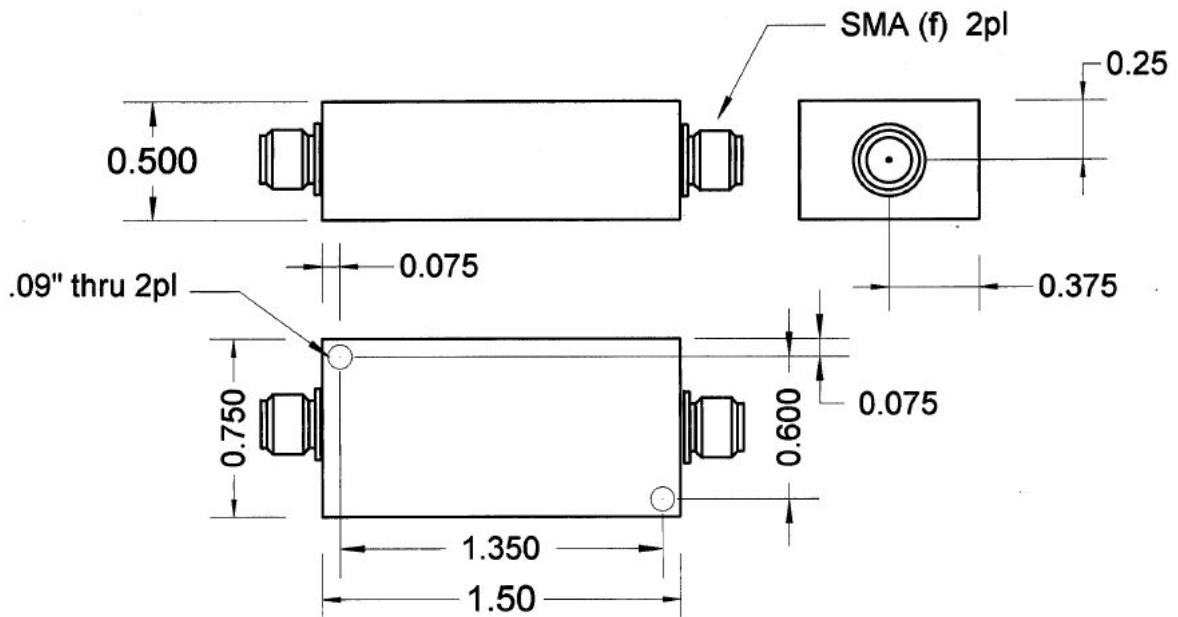



Response Plot:

