


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
3	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC	1	
4	24-00003	Overmold, PVC, black	1	
5	24-00004	Overmold, PVC, black	1	

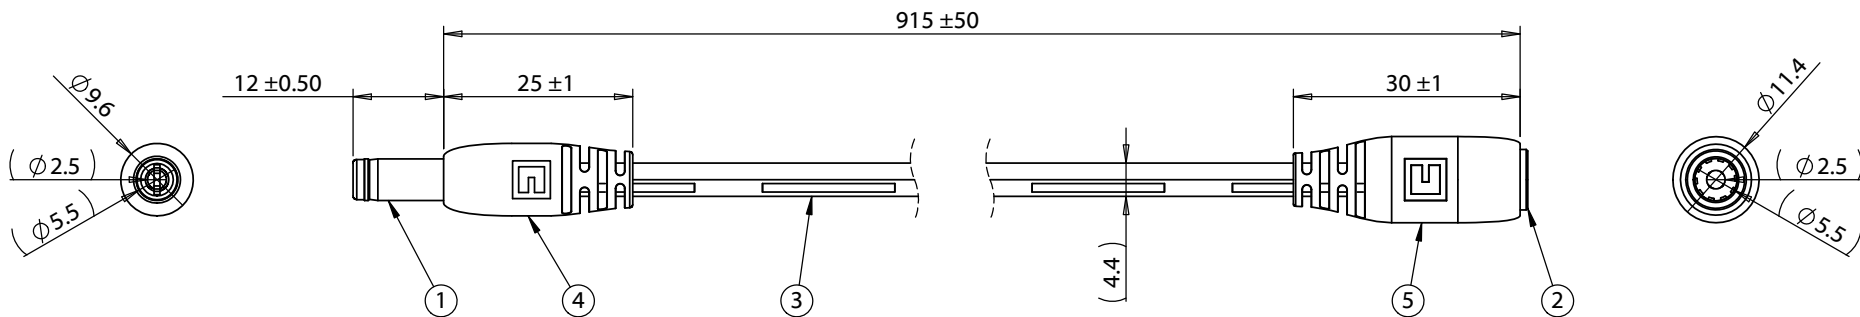

Notes:
 Cable rated for 7A, 48 Vdc
 Functionally equivalent components may be substituted

Wiring diagram		
50-00026	Wire Color	50-00027
Center	Black with stripe	Center
Sleeve	Black	Sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1>
A	6/28/2019	Initial release	AG <small>Digitally signed by AG Date: 2019.08.05 11:42:10 -07'00'</small>		
A1	8/5/2019	Increased cable voltage rating	Verified:	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size:
				Cable, 915 mm, 5.5x2.5x12 mm 50-00026 dc plug to 5.5x2.5 mm 50-00027 dc jack, 18 AWG, 30-00007 wire	Part number:
					A 10-01073
					Scale: 1:2
					Sheet 1 of 1

5

4

3

2

1