
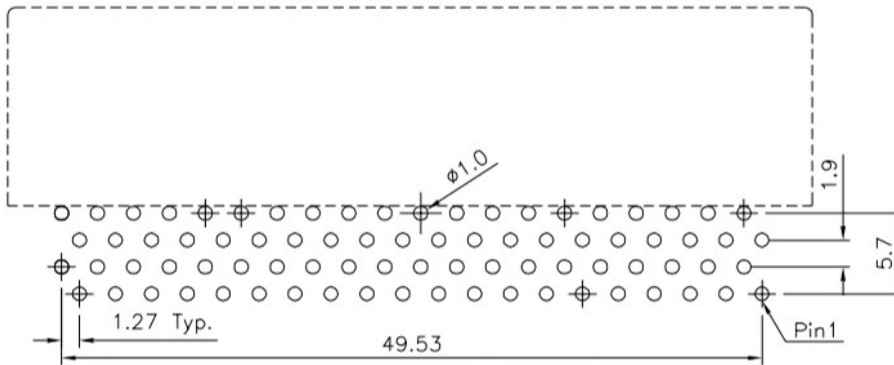
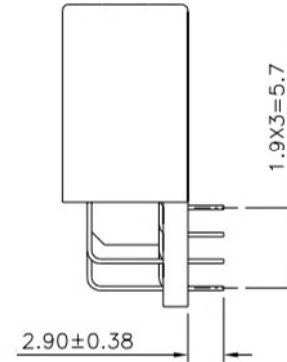
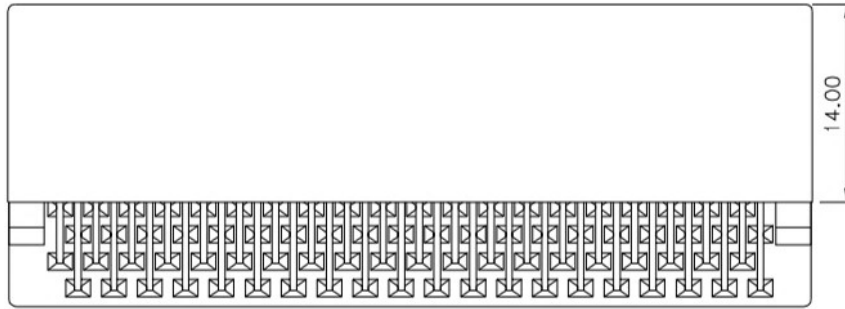


**SPECIFICATION**

Current Rating:1 Amp  
Voltage Rating:250V AC RMS  
Dielectric Withstanding Voltage:500V AC RMS 60Hz  
For 1 Minute  
Contact Resistance:30 Milliohms Max. At 1 Amp DC  
Insulation Resistance:1000 Megaohms Min.  
At 500V DC  
Temperature Range:-55°C~+85°C  
Insulator:PA66+G.F.  
Contact:Brass  
Gold Flash On Contact Area,Tin Plated  
On Solder Tails,Over Nickel  
RoHS Compliant

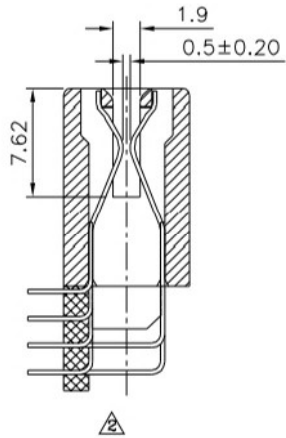

Recommended P.C.B. Layout(Top View)

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
10156

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
0~10 ±0.20  
10~30 ±0.30  
30~100 ±0.40  
100~300 ±0.50  
ANG. ±0.5°

△3	B3	Modify Data	HZF	01/30/2019
△2	B2	Modify Data	HZF	01/17/2019
△1	B1	Modify Data	HZF	11/07/2015
△0	B0	NEW RELEASE	HZF	09/08/2014
NO.	REV.	REVISIONS	CHK	DATE

SCALE NONE REV. B3 UNIT mm