



ARICELL SCL-06

Bobbin Construction Size AA

Scope: This data sheet describes the mechanical design and electrical performance of the AriCell SCL-06, AA-size, 3.6V, 2.4Ah, Primary Lithium Thionyl chloride (SOCl₂), HIGH ENERGY battery.

Characteristics:

Nominal voltage: 3.6V


Nominal capacity: 2.4Ah (@ 1.8kΩ / 2mA at 25°C, cut-off voltage 2V)

Maximum recommended continuous current: 60mA

Maximum recommended pulse current: 100mA




Operating temperature range: -55°C to +85°C

Nominal weight: 17g

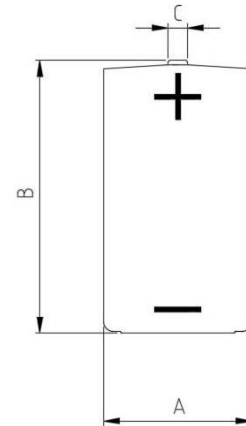

units=mm

	A	B	C
SCL-06	Max.14.5	Max.50.5	Ø 4.3

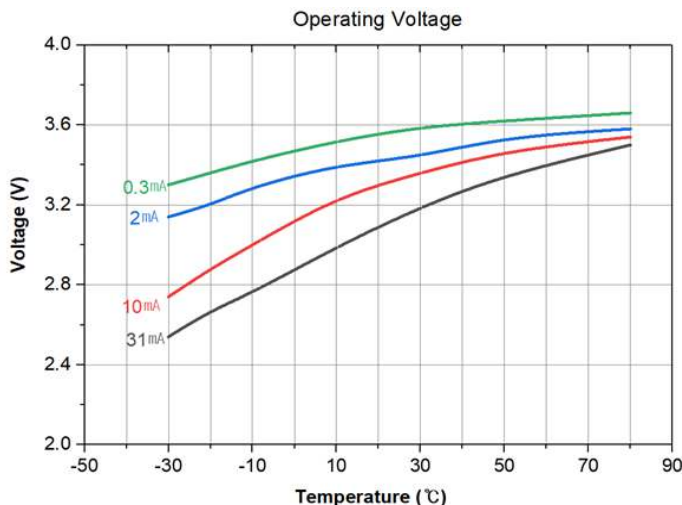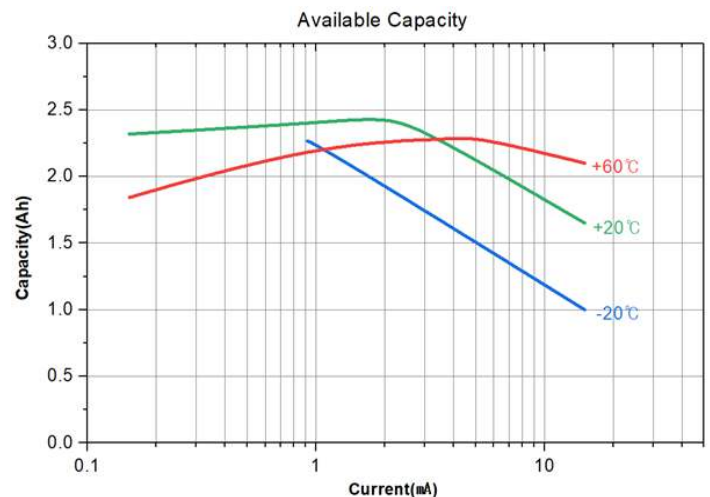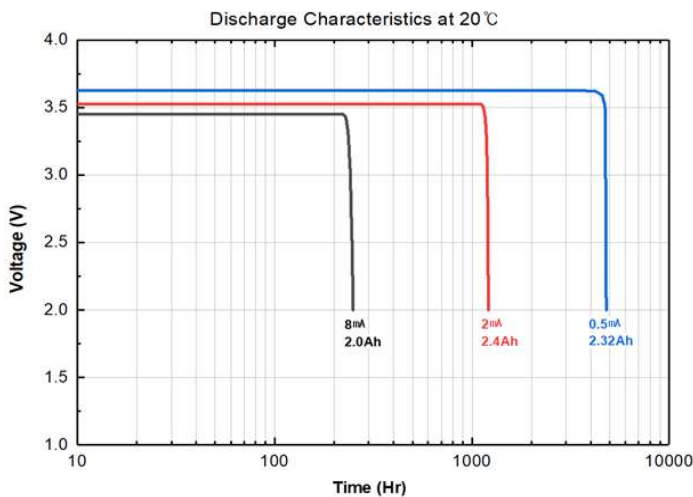

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Manufactured for, and distributed by:
Devon Company
 680 Main Street, Ste. 206 Watertown, CT 06795
 Phone: (860)945-1177 Fax: (860)274-5381
 Email: info@devon-company.com
www.devon-company.com