


Rail D-Sub Backshells TE Internal #: 1-2308338-1 Shielded, Single or Dual Cable Entry, Zinc, Straight, Shell Size 5, 78 / 50 Position, Rail D-Sub Backshells

View on TE.com >

Connectors > Connector Accessories > Connector Backshells

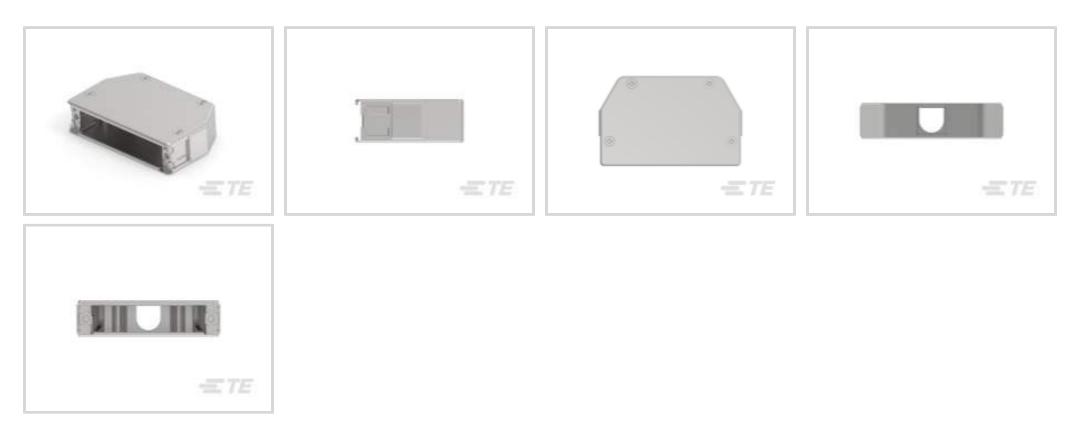

Connector Backshell Product Style: Shielded

Connector Backshell Product Type: Single or Dual Cable Entry

Primary Product Material: Zinc

Body Orientation: Straight

Compatible With Connector Shell Size: 5

Features

Product Type Features



| | | - y | I Cut | |
|--|--|-----|-------|--|
| | | | | |

| Connector Backshell Product Style | Shielded | | | | | |
|-----------------------------------|----------------------------|--|--|--|--|--|
| Connector Backshell Product Type | Single or Dual Cable Entry | | | | | |
| Configuration Features | | | | | | |
| Number of Positions | 50, 78 | | | | | |
| Body Features | | | | | | |
| Primary Product Material | Zinc | | | | | |
| Cable Exit Angle | 180°, 45° | | | | | |
| Mechanical Attachment | | | | | | |
| Mating Retention Type | Jackscrew | | | | | |
| Thread Size | None | | | | | |
| Housing Features | | | | | | |
| Body Orientation | Straight | | | | | |
| Compatible With Connector Shape | D-Shaped | | | | | |
| Usage Conditions | | | | | | |

C For support call+1 800 522 6752

1-2308338-1

Shielded, Single or Dual Cable Entry, Zinc, Straight, Shell Size 5, 78 / 50 Position, Rail D-Sub Backshells



| Operating Temperature Range | -40 - 90 °C[-40 - 194 °F] | | | |
|---|---|--|--|--|
| Operation/Application | | | | |
| Compatible With Connector Shell Size | 5 | | | |
| Industry Standards | | | | |
| UL Flammability Rating | UL 94V-0 | | | |
| Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU | Compliant with Exemptions | | | |
| EU ELV Directive 2000/53/EC | Compliant with Exemptions | | | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold | | | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after | | | |
| | handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. | | | |

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

1-2308338-1


Shielded, Single or Dual Cable Entry, Zinc, Straight, Shell Size 5, 78 / 50 Position, Rail D-Sub Backshells








Also in the Series | Rail D-Sub Backshells

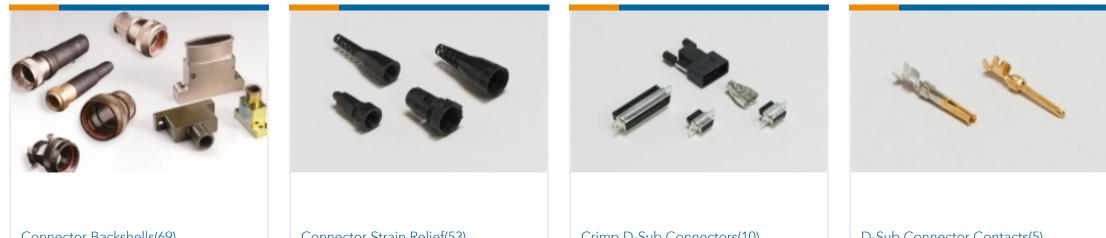

| Connector Backshells(69) | Connector Strain Relief(53) | Crimp D-Sub Connectors(10) | D-Sub Connector Contacts(5) |
|--------------------------|-----------------------------|----------------------------|-----------------------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

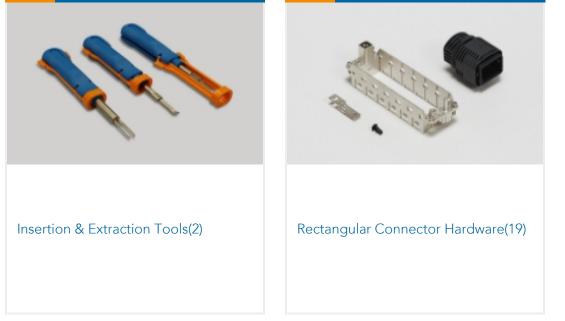

Customers Also Bought



1-2308338-1

Shielded, Single or Dual Cable Entry, Zinc, Straight, Shell Size 5, 78 / 50 Position, Rail D-Sub Backshells





TE Part #YASDD210-23PN-919Y RECEPT ASSY.2 HOLE.TYPE 2.ASDD. MOD919Y.

Documents

Product Drawings QL-FULL METAL HOODS SIZE 5 (1 CABLE CLP)

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2308338-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2308338-1_A.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_1-2308338-1_A.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Rail D-Sub Backshells Flyer

English