

# + Datasheet EE072

Humidity and Temperature Probe  
with Digital Interface



# EE072

## Humidity and Temperature Probe with Digital Interface

The EE072 probe meets the highest requirements of demanding process and climate control applications such as in agriculture, life stock, food, pharma, clean rooms, outdoor, artificial snow machines and transportation. Besides the measurement of relative humidity (RH) and temperature (T) the EE072 calculates all other humidity related parameters.

### Measurement Performance

The high-end E+E humidity sensing element manufactured in state-of-the-art thin film technology stands for outstanding measurement accuracy.

### Long-Term Stability

The E+E proprietary coating protects the sensing element against corrosive and electrically conductive pollution. The combination of robust sensing head and fully encapsulated electronics leads to outstanding performance even in harsh and condensing environment.

### Versatile and Reliable

With its IP65 stainless steel or polycarbonate enclosure and the wide choice of filter caps, the EE072 tackles even challenging industrial applications.

### Easy Installation

The M12x1 connector and the standard-compliant digital communication via Modbus RTU or CANopen facilitate the design-in of the sensor and minimize installation costs.

### Configurable and Adjustable

The setup and adjustment of the EE072 can be easily performed with an optional adapter and the free PCS10 Product Configuration Software.



EE072 with polycarbonate enclosure and membrane filter



EE072 with stainless steel enclosure and stainless steel sintered filter

# Features



## Measurement performance

- High RH / T accuracy
- Temperature compensation
- Calculated variables
  - Dew point (Td)
  - Frost point (Tf)
  - Wet bulb temperature (Tw)
  - Ice bulb temperature (Ti)
  - Water vapour partial pressure (e)
  - Mixture ratio (r)
  - Absolute humidity (dv)
  - Specific enthalpy (h)
- Configurable pressure compensation parameter

## Mechanical construction

- Stainless steel or polycarbonate enclosure
- IP65
- Encapsulated electronics

## Connection

- RS485 with Modbus RTU
- CANopen
- M12x1 connector

## E+E RH/T sensing element

- Very robust
- E+E proprietary coating
- Sealed solder pads
- Tested according to automotive standard AEC-Q200

## Configurable and adjustable

- Free configuration software




## Inspection certificate

According to DIN EN 10204-3.1

# Features

## Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.

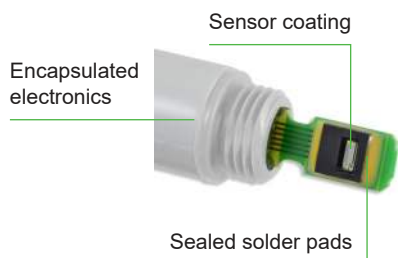

Sensing head with sensor coating and underfiller

## E+E Modular Sensor Platform

The EE072 is compatible with the Sigma 05 host device of the E+E Modular Sensor Platform. Together they become a versatile, plug-and-play RH/T modular sensor with analogue outputs and optional display. Besides EE072, Sigma 05 accommodates also other E+E intelligent sensing probes. See [www.epluse.com/sigma05](http://www.epluse.com/sigma05) for further details.




Sigma 05 with EE072

# Dimensions

Values in mm (inch)

## Probe

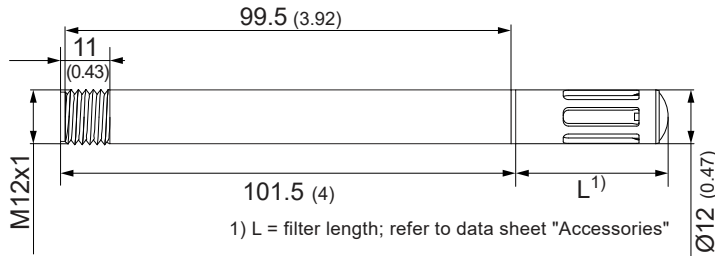

# Technical Data

## Measurands

### Relative Humidity (RH)

<b>Measuring range</b>	0...100 %RH
<b>Accuracy<sup>1)</sup></b> incl. hysteresis, non-linearity and repeatability	$\pm(1.3 + 0.3 \% \text{ mv}) \%RH$ $\pm 2,3 \%RH$ $\pm(1.5 + 1.5 \% \text{ mv}) \%RH$
<b>RH ≤ 90 %</b> <b>-15...+40 °C (5...+104 °F)</b>	
<b>RH &gt; 90 %</b> <b>-15...+40 °C (5...+104 °F)</b> <b>-40...+80 °C (-40...+176 °F)</b>	
<b>Response time t<sub>90</sub></b> , typ. @20 °C (68 °F)	≤15 s with stainless steel grid filter
<b>Measuring interval</b>	1 s
<b>Resolution</b>	0.01 %RH

mv = measured value

1) Traceable to international standards, administrated by NIST, PTB, BEV,...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

For Modbus, the accuracy is defined at a 12 V DC supply, baud rate 9600, without termination resistor, a polling interval ≥1 s and a flow velocity > 0.2 m/s. For CANopen, the accuracy is defined at a flow velocity > 0.2 m/s.

### Temperature (T)

<b>Measuring range</b>	-40...+80 °C (-40...176 °F)
<b>Accuracy<sup>1)</sup></b>	$\pm \Delta T [^{\circ}C]$
<b>Measuring interval</b>	1 s
<b>Resolution</b>	0.01 °C

1) Traceable to international standards, administrated by NIST, PTB, BEV,...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

For Modbus, the accuracy is defined at a 12 V DC supply, baud rate 9600, without termination resistor, a polling interval ≥1 s and a flow velocity > 0.2 m/s (39 ft/min). For CANopen, the accuracy is defined at a flow velocity > 0.2 m/s (39 ft/min).

# Technical Data

## Outputs




### Digital

<b>Digital interface</b>	RS485 (EE072 = 1 unit load)
<b>Protocol</b> <b>Factory settings<sup>1)</sup></b> <b>Supported Baud rates</b> <b>Measured data types</b>	Modbus RTU 9 600 Baud, parity even, 1 stop bit, Modbus address 234 9 600, 19 200, 38 400, 57 600, 76 800 and 115 200 FLOAT32 und INT16
<b>Protocol / Profile</b> <b>Connector</b> <b>Factory settings<sup>2)</sup></b> <b>Supported Baud rates</b>	CANopen / device profile CiA 404 M12x1, 5 poles, pin assignment according to CiA 303-1 Data rate 125 kBit/s, node ID 64 125 kBit/s, 250 kBit/s, 500 kBit/s, 800 kBit/s, 1 MBit/s

1) For more details about communication setting see User Manual and Modbus Application Note at [www.epluse.com/ee072](http://www.epluse.com/ee072).

2) For further information on the configuration see User Manual and the EDS file (Electronic Data Sheet).

## General

<b>Power supply</b> class III  USA & Canada: Class 2 supply necessary	10 - 28 V DC
<b>Current consumption</b> , typ.	3 mA (RS485, without termination resistor) 8 mA (CAN)
<b>Storage conditions</b>	-40...80 °C (-40...176 °F) 0...95 %RH, non-condensing
<b>Enclosure</b>	<b>Material</b> Polycarbonate RAL 7035 Stainless steel 1.4404 / AISI 316 <b>Protection rating</b> IP65 (when plugged into an appropriate M12x1 socket)
<b>Electromagnetic compatibility</b>	EN 61326-1:2013    EN 61326-2-3:2013    Industrial environment FCC Part15 Class B    ICES-003 Class B
<b>Conformity</b>	 
<b>Configuration and adjustment</b>	PCS10 Product Configuration Software Free download from <a href="http://www.epluse.com/pcs10">www.epluse.com/pcs10</a>

# Ordering Guide

Feature	Description	Code	
		<b>EE072-</b>	
Enclosure material	Polycarbonate (PC)	<b>HS1</b>	
	Stainless steel	<b>HS2</b>	
Temperature accuracy	High	<b>TT1</b>	
	Standard	<b>TT2</b>	<b>TT2</b>
Filter	Membrane, polycarbonate body	<b>F2</b>	
	Metal grid, polycarbonate body	<b>F3</b>	
	Stainless steel sintered	<b>F4</b>	
	Polytetrafluoroethylene (PTFE)	<b>F5</b>	
	Stainless steel - metal grid (up to 180 °C / 356 °F)	<b>F9</b>	
	PTFE membrane, stainless steel body	<b>F11</b>	
Digital interface	Catalytic for H <sub>2</sub> O <sub>2</sub> sterilisation	<b>F12</b>	
	RS485 (Modbus RTU)	<b>J3</b>	
	CANopen		<b>J8</b>

## Order Examples

### EE072-HS2TT1F4J3

Feature	Code	Description
Enclosure material	<b>HS2</b>	Stainless steel
Temperature accuracy	<b>TT1</b>	High
Filter	<b>F4</b>	Stainless steel sintered
Digital interface	<b>J3</b>	RS485 (Modbus RTU)

### EE072-HS1TT2F3J8

Feature	Code	Description
Enclosure material	<b>HS2</b>	Polycarbonate (PC)
Temperature accuracy	<b>TT2</b>	Standard
Filter	<b>F3</b>	Metal grid, polycarbonate body
Digital interface	<b>J8</b>	CANopen

# Accessories


For further information see datasheet [Accessories](#).

Accessories general	Code
E+E Product Configuration Software (Free download: <a href="http://www.epluse.com/pcs10">www.epluse.com/pcs10</a> )	PCS10
Protection cap for the M12 cable socket	HA010781
Protection cap for the M12 plug of EE072	HA010782
Protection cap for 12 mm (0.47") probe	HA010783
Stainless steel mounting flange	HA010201
Plastic mounting flange	HA010202
M12 Y adaptor	HA030204
Wall mounting clip	HA010211
Radiation shield for probes with Ø12mm (Ø0.47")	HA010502
Drip water protection	HA010503

Accessories Modbus	Code
M12 cable connector for self assembly, 4 poles	HA010707
Modbus configuration adapter	HA011018
Connection cable M12 - flying leads	1.5 m (59.06") HA010819 5 m (196.85") HA010820 10 m (393.70") HA010821

Accessories CAN	Code
M12 cable connector for self assembly, 5 poles	HA010708
CAN configuration adapter	HA011021
Connection cable CAN with 120 Ω termination, M12, 1.8 m (5.9 ft)	HA010850



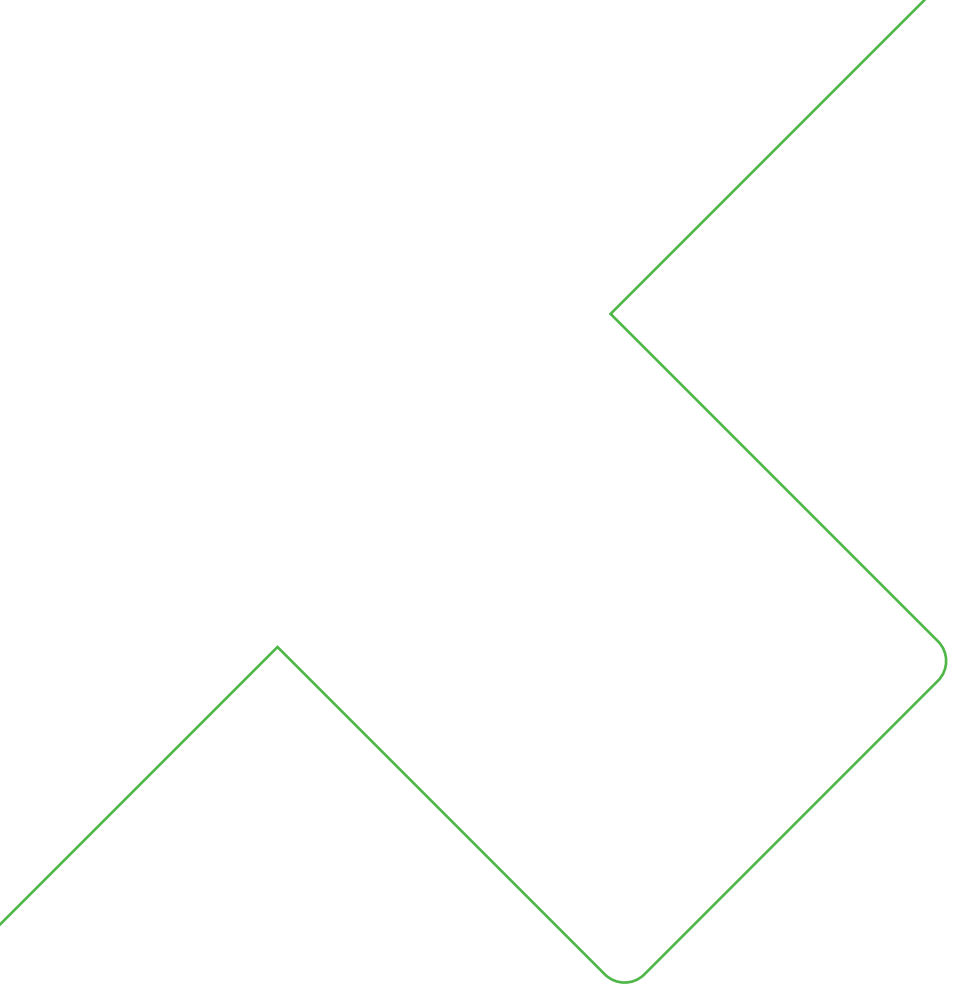

Company Headquarters &  
Production Site

**E+E Elektronik Ges.m.b.H.**  
Langwiesen 7  
4209 Engerwitzdorf | Austria  
T +43 7235 605-0  
F +43 7235 605-8  
info@epluse.com  
www.epluse.com

Subsidiaries

**E+E Sensor Technology (Shanghai) Co., Ltd.**  
T +86 21 6117 6129  
info@epluse.cn

**E+E Elektronik France SARL**  
T +33 4 74 72 35 82  
info.fr@epluse.com

**E+E Elektronik Deutschland GmbH**  
T +49 6171 69411-0  
info.de@epluse.com

**E+E Elektronik India Private Limited**  
T +91 990 440 5400  
info.in@epluse.com

**E+E Elektronik Italia S.R.L.**  
T +39 02 2707 86 36  
info.it@epluse.com

**E+E Korea Co., Ltd.**  
T +82 31 732 6050  
info.kr@epluse.com

**E+E Elektronik Corporation**  
T +1 847 490 0520  
info.us@epluse.com

Version v2.7 | 03-2023  
Modification rights reserved



—  
your partner  
in sensor  
technology.

[www.epluse.com](http://www.epluse.com)