

“Stay Connected” with



HEYware Products

a PennEngineering® Company

“Coined”  
edges prevent  
cable damage



- Heyco’s SunRunner and SunRunner EZ’s robust “double-compression” design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20” (5,1 mm) to .33” (8,3 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner Vidrio™ is designed to mount directly onto the glass panel with compression force only.** Will not harm the glass surface, and the black color meets many HOA requirements!
- The TPE coating on the SunRunner Vidrio™ provides an electrically insulated surface.
- **SunRunner EZ’s are designed for thicker module frames** as well as racking – accommodates profiles up to .250” (6,4 mm) thick!
- **SunRunner 4 designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires.**
- SunRunner 4 is constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- DFARS Compliant.




## HEYClip™ SunRunner® Cable Clips

Double-Compression, Straight-thru Design

| PANEL THICKNESS CLAMPING RANGE   |         |     |     | WIRE DIA. RANGE                                | PART NO.  |           | DESCRIPTION                         | FOOTPRINT     |                | OVERALL HEIGHT |      |     |
|--|---------|-----|-----|--|-----------|-----------|-------------------------------------|---------------|----------------|----------------|------|-----|
| Minimum  | Maximum |     |     |  | 304       | 316       |                                     | A x B         |                | C              |      |     |
| in.  | mm.     | in. | mm. |  | Stainless | Stainless |                                     |               | in.            | mm.            | in.  | mm. |
| 1-2 Wires - SunRunner Clip for panels up to .090” (2,3 mm) thick   |         |     |     |  |           |           |                                     |               |                |                |      |     |
| .06  | 1,4     | .09 | 2,3 | .20” (5,1 mm)-<br>.33” (8,3 mm)<br>each cable  | S6405     | S6490     | SunRunner® Clip<br>100 Pack         | .97 x<br>.50  | 24,6 x<br>12,7 | .39            | 9,9  |     |
|  |         |     |     |  | S6445     | S6495     | SunRunner® Clip<br>Bulk             |               |                |                |      |     |
| 1-2 Wires - SunRunner Vidrio™ Clip for GLASS panels up to .250” (6,4 mm) thick <span style="float: right;">NEW PRODUCTS</span> |         |     |     |  |           |           |                                     |               |                |                |      |     |
| .13  | 3,2     | .25 | 6,4 | .20” (5,1 mm)-<br>.33” (8,3 mm)<br>each cable  | S6460     | -         | SunRunner® Vidrio™ Clip<br>100 Pack | .99 x<br>.52  | 25,1 x<br>13,2 | .45            | 11,4 |     |
|  |         |     |     |  | S6500     | -         | SunRunner® Vidrio™ Clip<br>Bulk     |               |                |                |      |     |
| 1-2 Wires - SunRunner EZ Clip for panels up to .250” (6,4 mm) thick  |         |     |     |  |           |           |                                     |               |                |                |      |     |
| .09  | 2,3     | .25 | 6,4 | .20” (5,1 mm)-<br>.33” (8,3 mm)<br>each cable  | S6407     | -         | SunRunner® EZ Clip<br>100 Pack      | .97 x<br>.50  | 24,6 x<br>12,7 | .41            | 10,4 |     |
|  |         |     |     |  | S6447     | -         | SunRunner® EZ Clip<br>Bulk          |               |                |                |      |     |
| 4 Wires - SunRunner 4 Clip for panels up to .125” (3,2 mm) thick   |         |     |     |  |           |           |                                     |               |                |                |      |     |
| .06  | 1,4     | .13 | 3,2 | .20” (5,1 mm)-<br>.30” (7,6 mm)<br>each cable* | S6443     | -         | SunRunner® 4 Clip<br>100 Pack       | 1,34 x<br>.50 | 33,8 x<br>12,7 | .36            | 9,1  |     |
|  |         |     |     |  | S6483     | -         | SunRunner® 4 Clip<br>Bulk           |               |                |                |      |     |
| 4 Wires - SunRunner 4 EZ Clip for panels up to .250” (6,4 mm) thick  |         |     |     |  |           |           |                                     |               |                |                |      |     |
| .13  | 3,2     | .25 | 6,4 | .20” (5,1 mm)-<br>.30” (7,6 mm)<br>each cable* | S6400     | -         | SunRunner® 4 EZ Clip<br>100 Pack    | 1,33 x<br>.50 | 33,8 x<br>12,7 | .36            | 9,1  |     |
|  |         |     |     |  | S6440     | -         | SunRunner® 4 EZ Clip<br>Bulk        |               |                |                |      |     |

\*Can accommodate up to three .33” (8,3 mm) diameter cables.

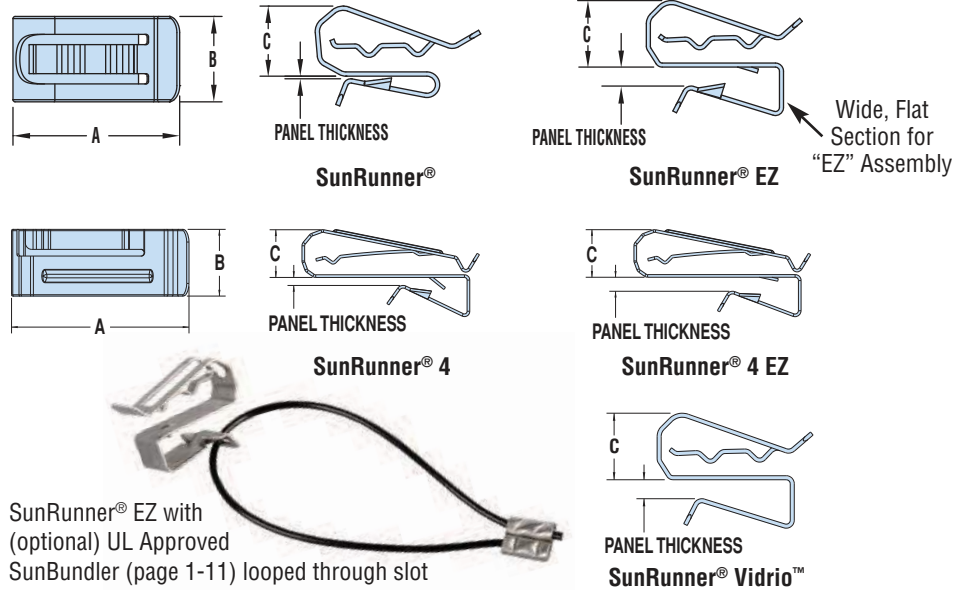

|                   |   |
|-------------------|---|
| Material          | .025” thick 304 or 316 stainless steel (SunRunner and SunRunner EZ)<br>.020” thick 410 stainless steel (SunRunner 4 and SunRunner 4 EZ) |
| Certifications    | Certified by UL for Compliance with both Canadian and US Requirements under File E54523   |
| Temperature Range | -40°F (-40°C) to 572°F (300°C)  |