

15 Watts

DLE Series



- AC Input LED Driver
- Constant Voltage & Current Versions
- High Power Factor
- High Efficiency
- Water Proof to IP67
- Class 2
- 3 Year Warranty

Specification

Input

| | |
|---------------------|---|
| Input Voltage | • 90-264 VAC, see derating curve |
| Input Frequency | • 47-63 Hz |
| Input Current | • 0.25 A at 115 VAC, 0.1 A at 230 VAC |
| Inrush Current | • 15 A at 230 VAC, cold start +25 °C |
| Power Factor | • >0.83 at 230 VAC, full load |
| No Load Input Power | • <0.5 W max at 230 VAC |
| Input Protection | • Internal T1.0A/250V fuse fitted in line |

Output

| | |
|--------------------------|--|
| Output Voltage | • See table |
| Minimum Load | • No min load required |
| Start Up Delay | • 500 ms max at 115 VAC |
| Hold Up Time | • No hold up for -A versions, 6ms min for -V versions |
| Line Regulation | • ±0.5% |
| Load Regulation | • ±1.0% in constant voltage mode, ±5.0% in constant current mode |
| Turn On Overshoot | • 5% max |
| Transient Response | • 5% max deviation, recovery to within 1% in 10 ms for a 50% load change |
| Ripple & Noise | • 1% max mV pk-pk, for -V versions (see note 2) |
| Overload Protection | • 130-160% for -V versions, auto recovery |
| Short Circuit Protection | • Trip and restart (hiccup mode) |
| Temperature Coefficient | • 0.04%/°C |

General

| | |
|---------------------|---|
| Efficiency | • See table |
| Isolation | • 3750 VAC Input to Output |
| Switching Frequency | • 100 kHz typical |
| MTBF | • >200 kHrs to MIL-HDBK-217F at 25 °C, GB |

Environmental

| | |
|-----------------------|---|
| Operating Temperature | • -20 °C to +70 °C (see derating curve) |
| Operating Humidity | • 5-100% RH, non-condensing |
| Storage Temperature | • -40 °C to +80 °C |
| Operating Altitude | • 3000 m |
| Vibration | • 10-500 Hz, 2 g, 10 mins/cycle, 6 cycles in each of 3 axes |

EMC & Safety

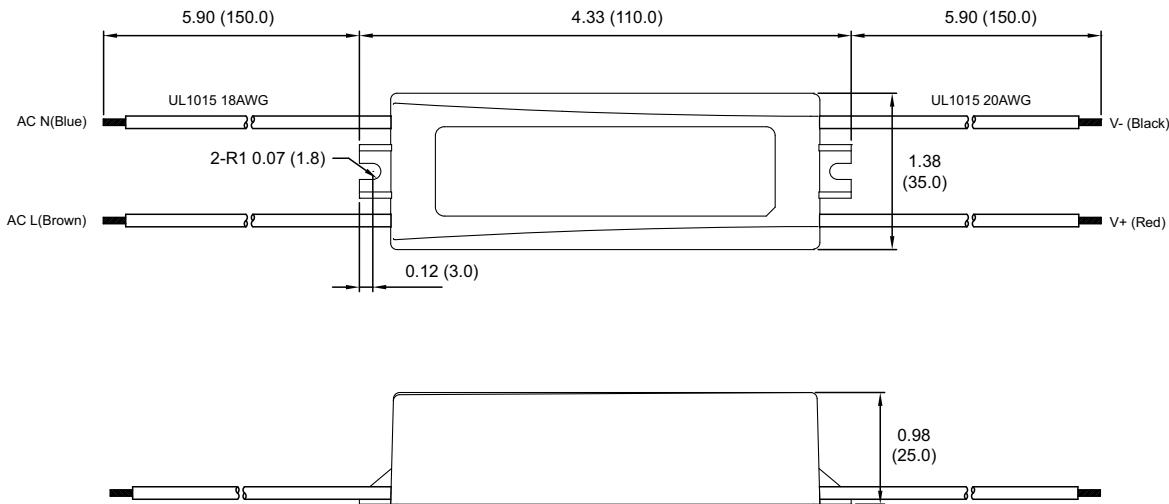
| | |
|----------------------|--|
| Emissions | • EN55015, class B conducted and radiated |
| Harmonic Currents | • EN61000-3-2, class C |
| Voltage Flicker | • EN61000-3-3 |
| ESD Immunity | • EN61000-4-2, 8 kV air and 4 kV contact, Perf Criteria A |
| Radiated Immunity | • EN61000-4-3, level 2 Perf Criteria A |
| EFT/Burst | • EN61000-4-4, level 2 Perf Criteria A |
| Surge | • EN61000-4-5, installation class 3, Perf Criteria B |
| Conducted Immunity | • EN61000-4-6, level 2 Perf Criteria A |
| Dips & Interruptions | • EN61000-4-11, 100% 10 ms, 30% 200 ms, Perf Criteria B, B |
| Safety Approvals | • EN61347, UL8750, CE Mark |

Models and Ratings

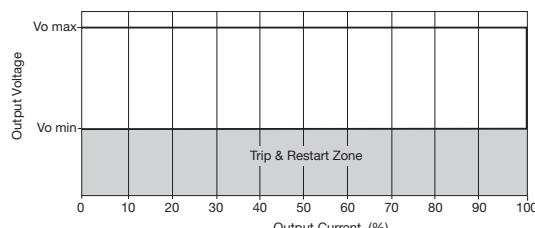
| Output Power | Output Voltage | Output Current | Efficiency ⁽¹⁾ | Model Number |
|--------------|----------------|----------------|---------------------------|---------------|
| 15 W | 12 V | 1250 mA | 81.0% | DLE15PS12-V |
| 15 W | 24 V | 630 mA | 83.0% | DLE15PS24-V |
| 15 W | 8 - 12 V | 1250 mA | 81.0% | DLE15PS1250-A |
| 15 W | 14 - 22 V | 700 mA | 83.0% | DLE15PS700-A |
| 15 W | 24 - 30 V | 500 mA | 83.0% | DLE15PS500-A |
| 14.7 W | 26 - 42 V | 350 mA | 84.0% | DLE15PS350-A |

Notes

1. Typical efficiency at full load and 230 VAC input.
 2. Measured using 12" twisted pair with 0.1 μ F and 47 μ F capacitors in parallel at 20 MHz bandwidth.

Mechanical Details**Notes**

1. Tolerance:
 $0.x = \pm 0.008 (\pm 0.2)$
 $0.xx = \pm 0.002 (\pm 0.05)$

Application Notes**Constant Current Curve****Derating Curves**