


REV. 0
DCO 170676

COIL: @ 25°C
 RESISTANCE 10000 OHMS ±10%
 NOMINAL VOLTAGE 4.0 mADC
 MUST OPERATE 2.0 mADC
 MUST RELEASE 1.0 mADC MAX, 0.2 mADC MIN.

ENVIRONMENT:
 VIBRATION 10 Hz TO 2000 Hz @ 15 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE 15 MS MAX
 RELEASE 10 MS MAX
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

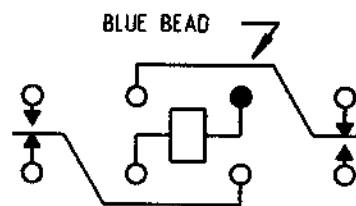

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS @ 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. ASB 4 NOV 02

CK. 1/1/02 [Signature]

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/13-123 REV.

3SAT RELAY

3SAT1340A2