

Disc Ceramic Capacitors




General Specifications - SL

CAPACITORS - CLASS SL

These capacitors have wide temperature characteristics but still offer low loss and linear type TC's.

They are specially designed to be smaller alternative to standard Class I capacitors of linear temperature coefficient.

Typical application is RF tuning and decoupling.

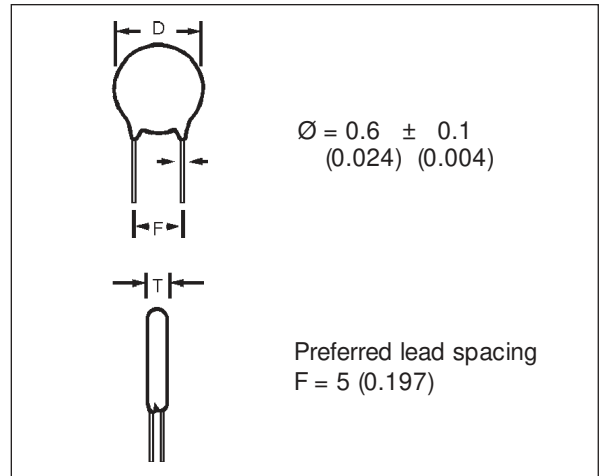

DIMENSIONS

millimeters (inches)

Digit 9 of P.N. (ø)	D ± 2 (0.079)	T max.	Available Lead Spacing
A	4.0 (0.157)	3.0 (0.118)	A,B,D,E,O,R
B	5.0 (0.197)	3.0 (0.118)	A,B,D,E,O,R,X
C	6.0 (0.236)	3.0 (0.118)	A,B,C,D,E,O,R,X
D	7.0 (0.276)	3.0 (0.118)	A,B,C,D,E,O,R,X
E	8.0 (0.315)	3.0 (0.118)	A,B,C,D,E,O,R,X

millimeters (inches)

Lead Spacing	Digit 8 of P.N.	
F		
2.5 (0.100)	D	—
5 (0.200)	A	O
6 (0.250)	E	X
7.5 (0.300)	B	R
10 (0.400)	C	W

PERFORMANCE CHARACTERISTICS

Measured at	$C_R \leq 100 \text{ pF} \rightarrow 1\text{MHz}/1.0 \text{ Vrms} / 25^\circ\text{C}$ $C_R > 100 \text{ pF} \rightarrow 1\text{kHz}/0.3 \text{ Vrms} / 25^\circ\text{C}$
Dissipation Factor	$C_R \leq 100 \text{ pF} \dots 0.25\%$ 1MHz @ 1.0 Vrms $C_R > 100 \text{ pF} \dots 1.0\%$ 100kHz @ 0.3 Vrms $C_R > 100 \text{ pF} \dots 0.25\%$ 1kHz @ 0.3 Vrms
Tolerance	$C_R < 10 \text{ pF} \rightarrow \pm 0.25 \text{ pF}, \pm 0.5 \text{ pF}$ $C_R \geq 10 \text{ pF} \rightarrow \pm 5\%, \pm 10\%, \pm 20\%$
Temperature Coefficient	+350 ppm... -1500 ppm (P350... N1500)
Insulation Resistance	@ $V_R \rightarrow \geq 10 \text{ G}\Omega$
Dielectric Strength NOTE: Charging current limited to 50 mA	$V_R = 100\text{V} \rightarrow V_t = 250\text{V (DC)}$ $V_R = 500\text{V} \rightarrow V_t = 1.25\text{kV (DC)}$
Operating Temperature Range (°C)	-30... +85
Climatic Category	30 / 085 / 21

Note: Damp Heat Steady State: 90... 95% R.H. 40°C / 21 days. No voltage to be applied.

Disc Ceramic Capacitors



Dimension Table - SL

SL – CAPACITANCE VS. DISC DIAMETER PHENOLIC COATED

millimeters (inches)

Temp. Coefficient		
Digits 1,2,3 of P.N.	5KK	5KQ
Rated Voltage C_R (pF) (V_R)	100 VDC 50 VAC	500 VDC 100 VAC
1.0	4.0 (0.157)	4.0 (0.157)
1.5		
2.2		
3.3		
4.7		
5.6		
8.2		
10		
12		
15		
18		
22		
33		
47		
56		
68		
82		
100		
150		
180		
220		
270	5.0 (0.197)	6.0 (0.236)
330		
470		
560	6.0 (0.236)	7.0 (0.276)
680	7.0 (0.276)	
820		
1000		


Diameter (ϕ) = 9th Part Number Digit

Disc Ceramic Capacitors



Ordering Code

HOW TO ORDER

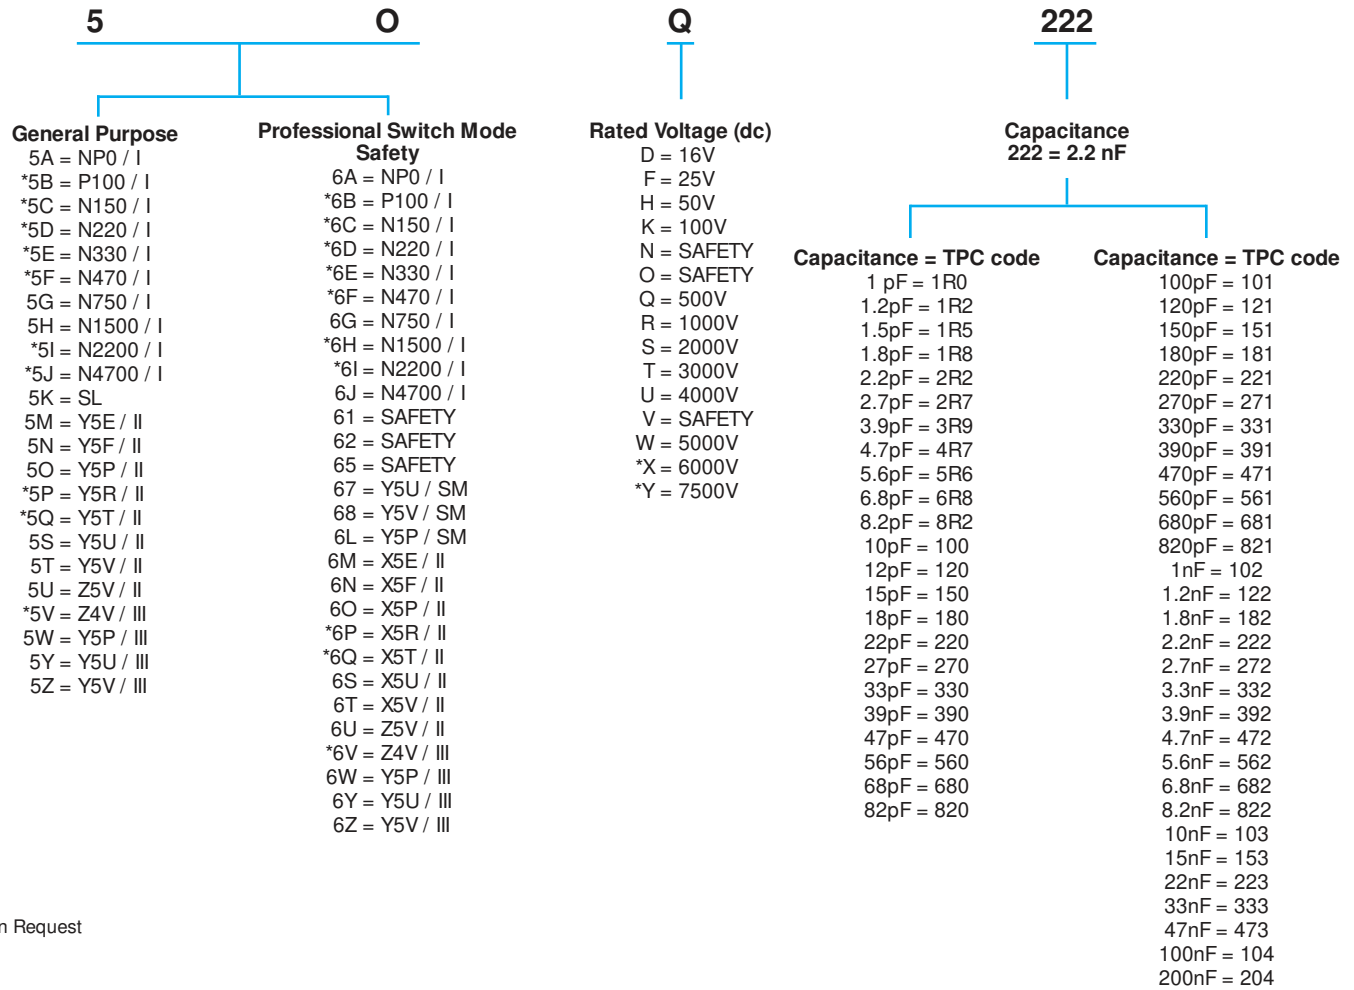

*Upon Request

Disc Ceramic Capacitors



Ordering Code

M

Tolerance
 C = ± 0.25 pF
 D = ± 0.50 pF
 J = $\pm 5\%$
 K = $\pm 10\%$
 M = $\pm 20\%$
 S = $-20+50\%$
 Z = $-20+80\%$
 P = $0+100\%$

A

**Capacitor Diameter
 ± 2 (0.079)**
 A = 4 (0.157)
 B = 5 (0.197)
 C = 6 (0.236)
 D = 7 (0.276)
 E = 8 (0.315)
 F = 9 (0.354)
 G = 10 (0.394)
 H = 11 (0.433)
 J = 13 (0.512)
 K = 15 (0.591)
 M* = 19 (0.748)


*Wire 0.8 (0.031) recommended

A

A

Packaging

Cardboard Strips



Bulk

E = $5 (0.197) \pm 1 (0.039)$ free wire length
 C = $10 (0.394) \pm 1 (0.039)$ free wire length
 D = $25 (0.984) \pm 1 (0.039)$ free wire length

Taping

Reel



Avisert			Panaset		
H	L	L	J	L	L




Avisert			Panaset		
I	M	M	K	M	M

Lead Forming				
mm	inches			
2.5 ± 0.5	.1 $\pm .025$	D	-	-
5 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$.2 $\pm .025$	A	O	N
6 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$.25 $\pm .025$	E	X	-
7.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$.3 $\pm .05$	B	R	Q
10 $\begin{smallmatrix} +0.5 \\ -1.0 \end{smallmatrix}$.4 $\pm .05$	C	W	-
12.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$.5 $\pm .05$	P	-	-


Finishing

Diam ≤ 9 (0.354) and
 F = 5.00 (0.197)



Coating does not surpass the bend

For every other:




Low Voltage

A = Phenolic (General Purpose) Q = Waxed phenolic

S = Epoxy (Professional) cap. diameter ≤ 8 (0.315)

D = Epoxy (Professional) cap. diameter > 8 (0.315)

High Voltage



F = Measured from the center of leads

C = Epoxy wire diameter 0.6 ± 0.1
 (0.024) \pm (0.004)

I = Epoxy wire diameter 0.8 ± 0.1
 (0.031) \pm (0.004)

L = Phenolic wire diameter 0.6 ± 0.1
 (0.024) \pm (0.004)

Please note that not all code combinations are either possible or available.

Disc Ceramic Capacitors



Marking

DIG. 2		Logo: Only in diam. ≥ 6mm	Capacitance		EIA		
O			TC / Class				
General Purpose		Professional					
A = NP0 / I	A = NP0 / I		1pF = 109	100pF = 101			
*B = P100 / I	B = P100 / I		1.2pF = 129	120pF = 121			
*C = N150 / I	C = N150 / I		1.5pF = 159	150pF = 151			
*D = N220 / I	D = N220 / I		1.8pF = 189	180pF = 181			
*E = N330 / I	E = N330 / I		2.2pF = 229	220pF = 221			
*F = N470 / I	F = N470 / I		2.7pF = 279	270pF = 271			
G = N750 / I	G = N750 / I		3.9pF = 399	390pF = 391			
H = N1500 / I	H = N1500 / I		4.7pF = 479	470pF = 471			
*I = N2200 / I	I = N2200 / I		5.6pF = 569	560pF = 561			
*J = N4700 / I	J = N4700 / I		6.8pF = 689	680pF = 681			
K = SL	7 = Y5U / SM	8.2pF = 829	820pF = 821				
M = Y5E / II	8 = Y5V / SM	10pF = 100	1nF = 102				
N = Y5F / II	L = Y5P / SM	12pF = 120	1.2nF = 122				
O = Y5P / II	M = X5E / II	15pF = 150	1.8nF = 182				
P = Y5R / II	N = X5F / II	18pF = 180	2.2nF = 222				
Q = Y5T / II	O = X5P / II	22pF = 220	2.7nF = 272				
S = Y5U / II	P = X5R / II	27pF = 270	3.9nF = 392				
T = Y5V / II	Q = X5T / II	39pF = 390	4.7nF = 472				
U = Z5V / II	S = X5U / II	47pF = 470	5.6nF = 562				
V = Z4V / III	T = X5V / II	56pF = 560	6.8nF = 682				
*W = Y5P / II	U = Z5V / II	68pF = 680	8.2nF = 822				
*X = Y5R / II	V = Z4V / III	82pF = 820	10nF = 103				
Y = Y5U / II	W = Y5P / III		15nF = 153				
Z = Y5V / II	X = Y5R / III		22nF = 223				
	Y = Y5U / III		33nF = 333				
	Z = Y5V / III		47nF = 473				
			100nF = 104				
			200nF = 204				

*Upon Request

DIG. 3	DIG. 7
Q	M
Rated Voltage	Tolerance
D = 16V	C = ±0.25pF
F = 25V	D = ±0.5pF
H = 50V	J = ±5%
K = 100V	K = ±10%
Q = 500V	M = ±20%
R = 1000V	S = -20 +50%
S = 2000V	Z = -20 +80%
T = 3000V	P = 0 +100%
U = 4000V	
W = 5000V	
X = 6000V	
Y = 7500V	

Safety Front

Capacitance	Type
As above	61V
	620
	65N

Tolerance
As above

Back: (Approval marks)

TC – Temperature coefficient.

DIG – for better understanding, check pages 3 and 4.


Disc Ceramic Capacitors



Packaging

IDENTIFICATION AND TRACEABILITY

On all TPC ceramic capacitors packages, you will find a bar code label with the following information:

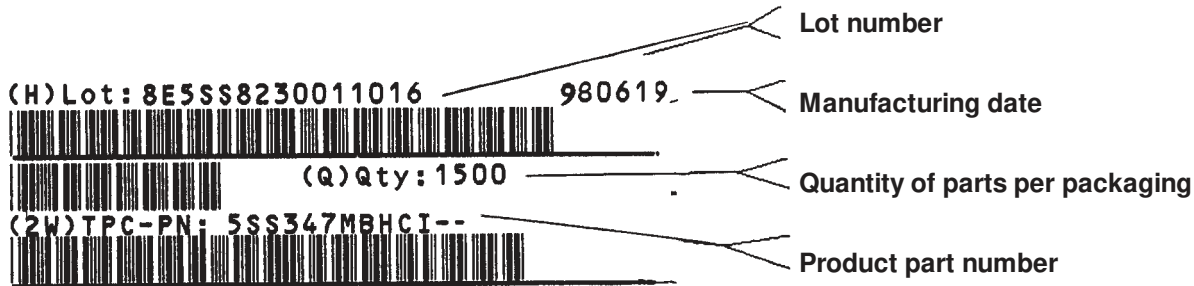

TAPED PARTS QUANTITY TABLE

millimeters (inches)

Rated Voltage (Vr)	Diameter D	Quantities	
		Ammopack	Reel
Vr <= 500V	D ≤ 7 (0.276)	2000	2500
	7 < D ≤ 11 (0.433)	2000	2000
500V < Vr <= 2KV	D ≤ 11 (0.433)	1500	2000
	D ≤ 11 (0.433)	1000	1500

CARDBOARD STRIPS QUANTITY TABLE

millimeters (inches)

Rated Voltage (Vr)	Diameter D	Lead Space	
		< = 5 (0.197)	> 5 (0.197)
Vr <= 500V	D ≤ 8 (0.315)	2500	1500
	8 (0.315) ≤ D ≤ 11 (0.433)	1500	-
	8 (0.315) ≤ D ≤ 13 (0.512)	-	1000
	11 (0.433) ≤ D ≤ 15 (0.591)	1000	-
	13 (0.512) ≤ D ≤ 19 (0.748)	-	500
	D ≤ 19 (0.748)	500	-
500V < Vr <= 2KV	D ≤ 9 (0.354)	1500	1000
	9 (0.354) ≤ D ≤ 11 (0.433)	-	1000
	9 (0.354) ≤ D ≤ 13 (0.512)	1000	-
	11 (0.433) ≤ D ≤ 19 (0.748)	-	500
	13 (0.512) ≤ D ≤ 19 (0.748)	500	-
2KV < Vr <= 5KV Safety 65N 62O	D ≤ 9 (0.354)	1500	-
	D ≤ 11 (0.433)	-	1000
	D ≤ 13 (0.512)	500	500
Safety 61V	D ≤ 6 (0.236)	1500	1500
	7 (0.275) ≤ D ≤ 9 (0.354)	1000	1000
	9 (0.354) ≤ D	500	500

Quantities for other package alternative, upon request.


Disc Ceramic Capacitors



Tape and Reel Specifications

There are two types of taped disc ceramic capacitors:
Straight or crimped leads.

Both types can be shipped on reels or ammopack.
The standard packaging quantities are shown below:

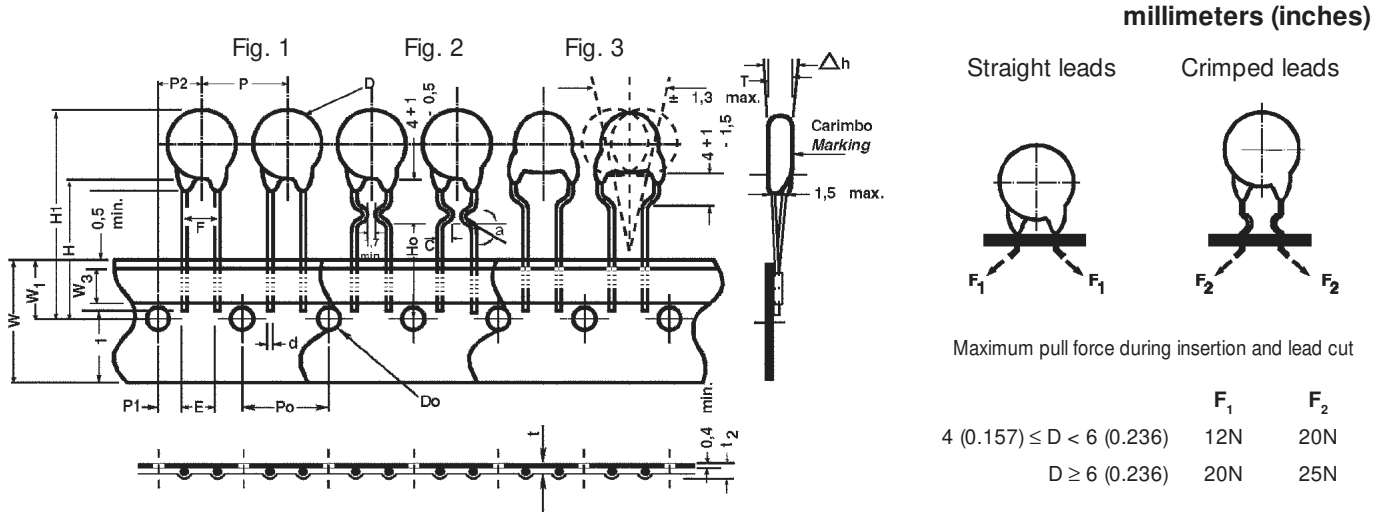

Digit 11	Available Tapings	Digit 9
L	→ Sizes 4 (0.157) ≤ D ≤ 11 (0.433)	A... H
M		
J H	→ Sizes 6 (0.236) ≤ D ≤ 11 (0.433)	C... H
K I		

TPC Code Digit 11

Packaging	Avisert	Panasert
Reel 	 H FIGURE 1	 J FIGURE 1
	 L FIGURE 2	 L FIGURE 2
	 L FIGURE 3	 L FIGURE 3
Ammopack 	 I FIGURE 1	 K FIGURE 1
	 M FIGURE 2	 M FIGURE 2
	 M FIGURE 3	 M FIGURE 3

Figure 2: Inside Crimp 100V... 1000V

Figure 3: Outside Crimp 1000V

Disc Ceramic Capacitors




Tape and Reel Specifications

millimeters (inches)

Description of Symbols		Straight Leads		Crimped
		Figure 1		Figure 2 & 3
		A (Avisert)	P (Panaset)	Avisert & Panaset
Crimp angle	∞	—	—	20°...45°
Crimp length	C	—	—	1.7 min.
Lead diameter	d	0.60 ± 0.1		
Disc diameter	D	11 max.		
Lead hole diameter	Do	4.0 ± 0.2		
Disc thickness	T	See Catalog		
Lead spacing	F	5.0 ^{+0.6} _{-0.2}		
Component alignment, front-rear	Δh	0 ± 1		
Height of component from tape center	H	19.5 ± 0.5	16.5 ± 0.5 - 0	—
Height from tape center to crimp	Ho	—	—	16 + 0.5 - 0
Component height	H1	32.25 max.	>23.5 <32.25	32.25 max.
Distance from component leads to tape bottom	ℓ_1	12 max.		
Tape width	W	18 ⁺¹ _{-0.5}		
Bonding tape width	W ₃	5.5 min.		
Feed hole position	W ₁	9.0 ± 0.5		
Pitch between discs	P	12.7 ± 1		
Feed hole pitch	Po	12.7 ± 0.3		
Hole center to lead	P1	3.85 ± 0.7		
Feed hole center to component center	P2	6.35 ± 1		
Tape + bonding tape thickness	t	0.7 ± 0.2		
Total tape thickness. including lead	t ₂	1.5 max.		

PACKAGING

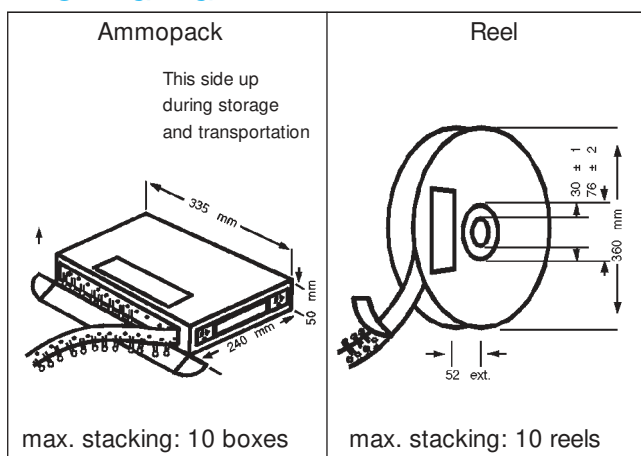

SHIPPING CONTAINER

