


PART NUMBER	FUSEHOLDER	FUSE	WIRE GA. / COLOR	LEAD STYLE	"A"
0FNY0001ZXJ-F14	0FNY0001ZXJ	0307014.M	#14 BLACK	1	203.2 (8.0)
0FNY0001ZXJ-F20	0FNY0001ZXJ	0307020.M	#14 BLACK	1	203.2 (8.0)
0FNY0002ZXJ-F30	0FNY0002ZXJ	0311030.M	#12 ORANGE	2	266.7 (10.5)

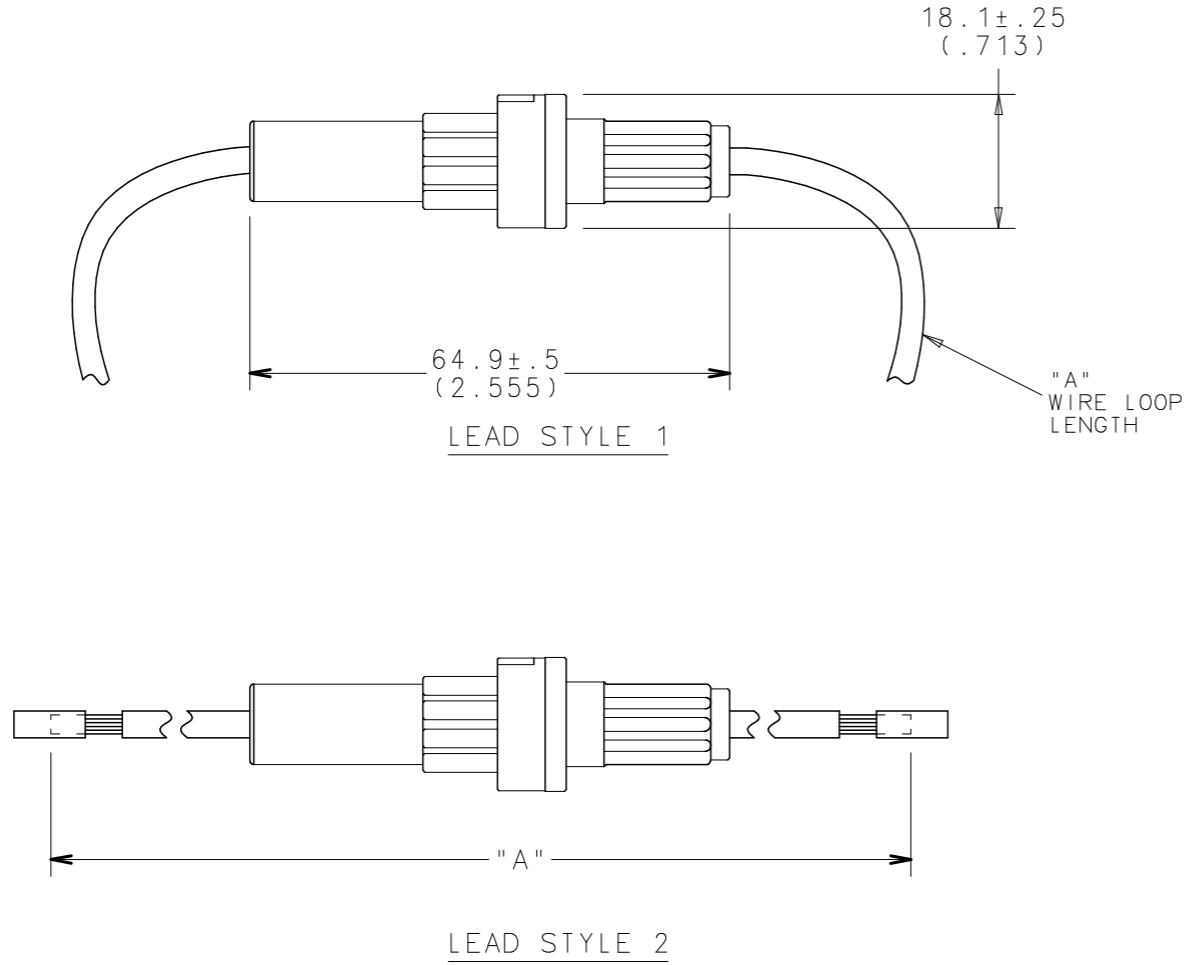

- NOTES:
1. MAX. OPERATING TEMPERATURE: 80°C.
 2. CRIMP: MUST MEET USCAR 21 STANDARD.
 3. FUSE HOLDER IS SHIPPED WITH FUSE INSTALLED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.
 DENOTES CRITICAL CHARACTERISTICS.
 DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
 DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN ATTLEFUSE INSPECTION INSTRUCTIONS.
 DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

COPIES TO		MATERIAL SPEC			FINISH		
1	9	DRW	DHM	DATE	DATE	DATE	SCALE
2	10	CHK					1=1
3	12	APPD					SUPER DRW
4	13						RAW STK WT
5	14						LBS/M
6	15						TOLERANCE UNLESS OTHERWISE SPECIFIED
7	16						TWO PLACE DEC ±.01
8	17						THREE PLACE DEC ±.005
	18						ANGULAR ±1°

LTR	REVISION	CHK	APD
A	000490ER-RELEASED 9/05/08		

Littlefuse
 DES PLAINES, ILLINOIS 60016

REVISION: A

DRWG. NO. SERIES OUTLINE: 0FNY0000ZXJ-F

TITLE: FUSEHOLDER, INLINE (WITH FUSE)

