



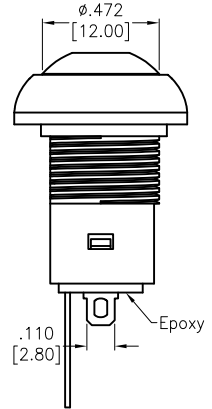


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/21	
A		UPDATE DRAWING	6/21/21	WX/RC

APPROVED: _____
 DATE: _____ TITLE: _____

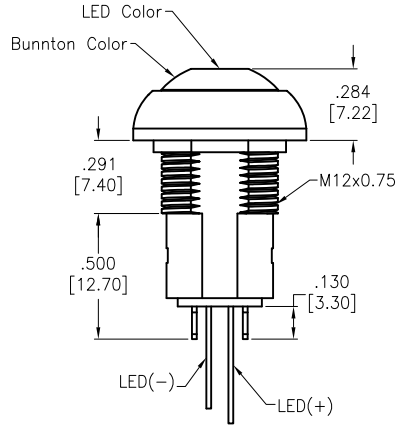

SW-PB11-4CSXX-10

Button Color		LED Color	
R	Red	R	Red
G	Green	G	Green
Y	Yellow	Y	Yellow
O	Orange	B	Blue
B	Blue	W	White
W	White		
K	Black		

SPECIFICATIONS:
 Material:
 Case: Polyamide66, rated UL 94V-0
 Bushing&Button: Polyamide66
 Terminal: Gold over Silver Plated
 Electrical:
 Rating: 100mA 24VDC
 2A 125VAC
 Contact resistance: 50 mΩ max
 Insulation resistance: 1G-ohms min @500VDC
 Dielectric withstanding voltage: 1,000 VAC rms
 Mechanical:
 Torque: 0.5Nm max
 Operating Force: 2~5N
 Temperature Rating:
 Operating temperature: -30°C to +85°C
 Environmental:
 IP67 front panel protection
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

APPROVALS		DATE
DRAWN	LH	2/18/21
CHECKED	AC	2/18/21
APPROVED		

ADAM TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 IP67 PUSH BUTTON SWITCH, SOLDER TYPE, LIGHTED,
 SPST, OFF-ON, GOLD OVER SILVER PLATED

SIZE	PART NO.	REV.
X	SW-PB11-4CSXX-10	A

REF: S00198T SCALE: NTS SHEET 1 OF 1