

AMPMODU | AMPMODU LOCKING CLIP

TE Internal #: 926657-6


Housing, Receptacle, Wire-to-Board, 6 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Signal, AMPMODU

LOCKING CLIP

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 6

Centerline (Pitch): 2.54 mm [.1 in]

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	6
Number of Rows	1

Body Features

Primary Product Color	Black	

Contact Features

Contact Type	Socket
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp	

Mechanical Attachment

Strain Relief	Without
PCB Mount Retention	Without
Mating Retention	Without



Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	PBT GV15
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1000
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




























Also in the Series | AMPMODU LOCKING CLIP

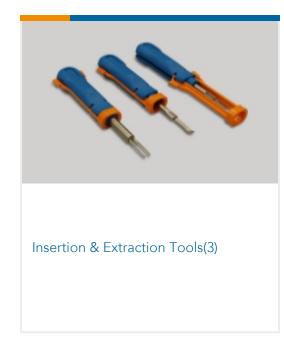









Customers Also Bought



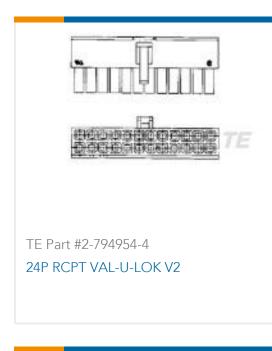
















TE Part #4-22487-0 SPRING,EXTENSION

TE Part #85BSD030PA0-5ASC PRESS,ISO,BACK-SIDE DIGITAL

Documents

Product Drawings LOCKING CLIP HSG

English

CAD Files

Customer View Model

ENG_CVM_926657-6_E1.3d_igs.zip

English

Customer View Model

ENG_CVM_926657-6_E1.3d_stp.zip

English

Customer View Model

ENG_CVM_926657-6_E1.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals

Housing, Receptacle, Wire-to-Board, 6 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Signal, AMPMODU LOCKING CLIP



UL Report

English