

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Assembled shielded round cable; controller: Emerson Delta V S-Series; connection 1: IDC/FLK socket strip (2x 24-position); connection 2: IDC/FLK socket strip (2x 24-position); cable length: variable



Commercial data

| | |
|------------------------|--------------------------------|
| Item number | 2906960 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Product key | CK2152 |
| Customs tariff number | 85444290 |
| Country of origin | DE |

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

Technical data

Product properties

| | |
|--------------|--------------|
| Product type | System cable |
|--------------|--------------|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP00 |
| Degree of protection (Installation location) | ≥ IP54 (Installation location) |
| Ambient temperature (operation) | -40 °C ... 70 °C (fixed installation) -10 °C ... 70 °C (flexible installation) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Altitude | ≤ 2000 m |

Electrical properties

| | |
|--------------------------|----------------------------------|
| Operating voltage (AC) | ≤ 30 V AC |
| Operating voltage (DC) | ≤ 60 V DC |
| Nominal operating mode | 100% operating factor |
| Current (Per path, 50°C) | ≤ 1 A (Uncoiled, see derating) |
| Current (Per path, 70°C) | ≤ 0.6 A (Uncoiled, see derating) |

Supported controller EMERSON DeltaV

| | |
|-------------------|----------------------------|
| Suitable I/O card | SE4053S2B11 SE4083S2B11 |
|-------------------|----------------------------|

Cable/line

| | |
|--------------|----------|
| Cable length | variable |
|--------------|----------|

50X0.14 [PVC]

| | |
|---------------------------------|--------------------------------|
| UL AWM Style | 2464/1061 |
| Number of positions | 50 |
| Shielded | yes |
| Cable type | 50X0.14 [PVC] |
| Conductor type | Assembled shielded round cable |
| Conductor structure signal line | 7x 0.16 mm |
| AWG signal line | 26 |
| Conductor cross section | 50x 0.14 mm ² |
| Wire diameter incl. insulation | 1 mm ±0.03 mm |
| External cable diameter | 11 mm ±0.3 mm |
| Outer sheath, material | Semi-rigid PVC |
| External sheath, color | gray |
| Conductor material | Tin-plated Cu litz wires |
| Cable resistance | ≤ 145 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 20 MΩ*km (20 °C) |

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

| | |
|---|---|
| Smallest bending radius, fixed installation | 114 mm |
| Smallest bending radius, movable installation | 205 mm |
| Max. bending cycles | 5000 (at a radius of $\geq 18x$ outside diameter) |
| Halogen-free | no |
| Flame resistance | IEC 60332-1-2 (raw cable) |
| | VDE 0842, Part 332-1-2 (raw cable) |
| | IEC 60332-3-22 (raw cable) |
| | UL VW-1 |
| | CSA FT-1 |
| Resistance to oil | can withstand occasional splashes (raw cable) |

Connection data

Connection 1

| | |
|----------------------------------|-----------------------|
| Connection in acc. with standard | based on IEC 60603-13 |
| Connection method | IDC/FLK socket strip |
| Number of connections | 2 |
| Number of positions | 24 |
| Conductor cross section AWG | 26 |
| Insertion/withdrawal cycles | > 50 |
| Pitch | 2.54 mm |

Connection 2

| | |
|----------------------------------|-----------------------|
| Connection in acc. with standard | based on IEC 60603-13 |
| Connection method | IDC/FLK socket strip |
| Number of connections | 2 |
| Number of positions | 24 |
| Insertion/withdrawal cycles | > 50 |
| Pitch | 2.54 mm |

Notes

| | |
|---------|--|
| General | For proper use, the specifications of the installation directive (see Downloads) must be observed. |
|---------|--|

2906960


<https://www.phoenixcontact.com/pc/products/2906960>

Drawings

Connection diagram

| FLK24 X1 A | FLK24 X3 B | FLK24 X2 C | FLK24 X4 D | Conductor color |
|---------------|---------------|---------------|---------------|-----------------|
| PIN 1 | PIN 1 | | | black |
| PIN 2 | PIN 2 | | | brown |
| PIN 3 | PIN 3 | | | red |
| PIN 4 | PIN 4 | | | orange |
| PIN 5 | PIN 5 | | | yellow |
| PIN 6 | PIN 6 | | | green |
| PIN 7 | PIN 7 | | | blue |
| PIN 8 | PIN 8 | | | violet |
| PIN 9 | PIN 9 | | | gray |
| PIN 10 | PIN 10 | | | white |
| PIN 11 | PIN 11 | | | white-black |
| PIN 12 | PIN 12 | | | white-brown |
| PIN 13 | PIN 13 | | | white-red |
| PIN 14 | PIN 14 | | | white-orange |
| PIN 15 | PIN 15 | | | white-yellow |
| PIN 16 | PIN 16 | | | white-green |
| PIN 17 | PIN 17 | | | white-blue |
| PIN 18 | PIN 18 | | | white-violet |
| PIN 19 | PIN 19 | | | white-gray |
| PIN 20 | PIN 20 | | | brown-black |
| PIN 21 | PIN 21 | | | brown-red |
| PIN 22 | PIN 22 | | | brown-orange |
| PIN 23 | PIN 23 | | | brown-yellow |
| PIN 24 | PIN 24 | | | brown-green |
| | | PIN 1 | PIN 1 | brown-blue |
| | | PIN 2 | PIN 2 | brown-violet |
| | | PIN 3 | PIN 3 | brown-gray |
| | | PIN 4 | PIN 4 | brown-white |
| | | PIN 5 | PIN 5 | green-black |
| | | PIN 6 | PIN 6 | green-brown |
| | | PIN 7 | PIN 7 | green-red |
| | | PIN 8 | PIN 8 | green-orange |
| | | PIN 9 | PIN 9 | green-blue |
| | | PIN 10 | PIN 10 | green-violet |
| | | PIN 11 | PIN 11 | green-gray |
| | | PIN 12 | PIN 12 | green-white |
| | | PIN 13 | PIN 13 | yellow-black |
| | | PIN 14 | PIN 14 | yellow-brown |
| | | PIN 15 | PIN 15 | yellow-red |
| | | PIN 16 | PIN 16 | yellow-orange |
| | | PIN 17 | PIN 17 | yellow-blue |
| | | PIN 18 | PIN 18 | yellow-violet |
| | | PIN 19 | PIN 19 | yellow-gray |
| | | PIN 20 | PIN 20 | yellow-white |
| | | PIN 21 | PIN 21 | gray-black |
| | | PIN 22 | PIN 22 | gray-brown |
| | | PIN 23 | PIN 23 | gray-red |
| | | PIN 24 | PIN 24 | gray-orange |

Diagram

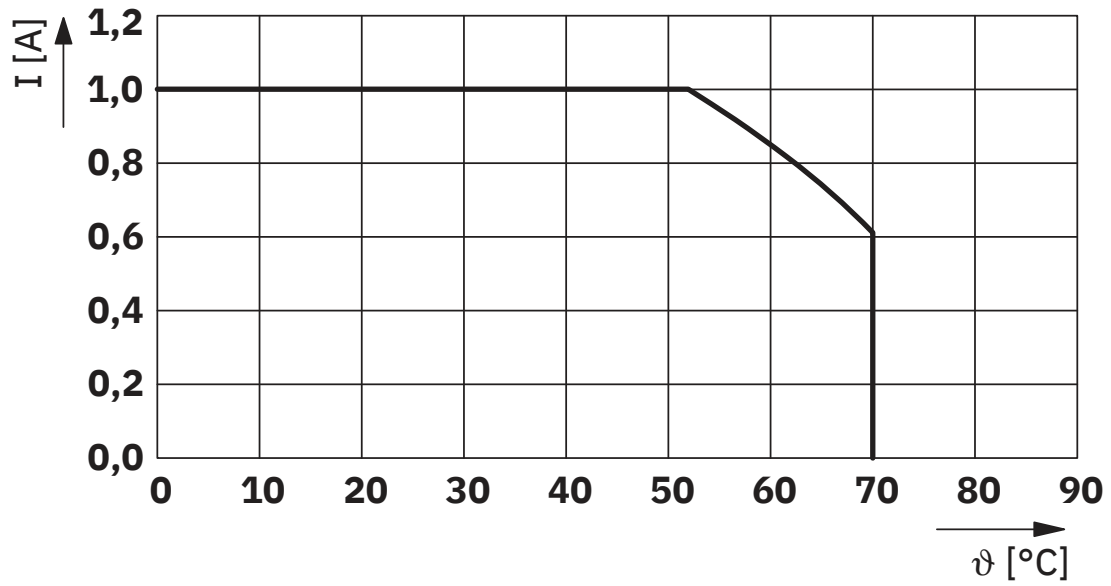

Maximum permissible current per path in uncoiled state

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2906960>



EAC

Approval ID: RU*-DE.HB*35.B00385



UL Listed

Approval ID: FILE E 238705

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 1 A | - | - |



cUL Listed

Approval ID: FILE E 238705

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 1 A | - | - |

cULus Listed

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27242220 |
| ECLASS-12.0 | 27242220 |
| ECLASS-13.0 | 27242220 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000237 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

CABLE-2FLK24-2FLK24-DV-S/... - Cable



2906960

<https://www.phoenixcontact.com/pc/products/2906960>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com